# TECHNICAL COLLECTION

# 3

KEYLIGHT

# TECHNICAL LIGHTING COLLECTION VOL. 3

**KEY**LIGHT

# LIGHTING INDEX


| | |
|---|---|
| RECESSED ROUND | 16 |
| RECESSED SQUARE | 38 |
| SURFACE | 48 |
| TRACK LIGHTING | 62 |
| MAGNET 48V SYSTEM | 86 |
| PENDANT | 106 |
| INTELLIGENT LIGHTING | 124 |
| TUNABLE LIGHTING | 148 |
| PROFILES | 158 |
| LINEAR SYSTEM | 192 |
| LED STRIPES & PROFILES | 196 |
| EMERGENCY | 212 |
| OUTDOOR LIGHTING | 220 |
| WARRANTY | 238 |
| SLM SPECIFICATIONS | 240 |

“Our lighting collection is designed with an emphasis on timeless aesthetics that will last for years. This is why Keylight is the preferred supplier in innumerable national and international projects worldwide.”

# About

Keylight has been active in the world of lighting for more than 15 years. What started out as a small company with a compact product range has, over the years, grown into a global player in the market. Our catalogue is nowadays filled with a sophisticated range of technical and design lighting.

All our lighting products are assembled in the Netherlands in our own assembly rooms and, if required, completely customised for our international clientele. Because we understand that every project is unique and that the lighting must also fit seamlessly into the environment. This is why we are the partner of choice for many architects, installers, interior designers and interior stylists when it comes to high-quality lighting.

Our lighting products find their way into many industries and sectors. For example, retail, shopping centres, hotels and the hospitality industry, offices, public spaces, outdoor areas and residential properties. Versatility, flexibility and design make our range feel at home in practically every situation.

In addition, Keylight is officially licensed by Philips Lighting. Partly thanks to this partnership, we supply lighting products with high quality LED chips and exceptional quality. This way we guarantee lighting products with a long life span and high quality light.

# Office showroom warehouse

**LIGHTBOXX, NIJKERK, THE NETHERLANDS**

LIGHTBOXX

# Challenges in Lighting

In recent years the technological advancements in our daily lives have come at a rapid pace. A huge shift is taking place from offline to online and new technologies have to be adapted faster and faster to keep up with the market. Keeping up with these changes can be quite overwhelming but is essential for every company to stay relevant. This applies to basically all environments, from educational facilities to retailers and from office spaces to the cultural sector.

The role lighting takes in this process is also rapidly becoming of a greater importance. Improving human wellbeing in offices is something that is gaining a lot of attention in recent years in order to drive productivity and efficiency. The retail market on the other hand has their own challenges in keeping the customers visit their shops instead of buying everything online. Focus is shifting from simply displaying products to creating an emersive experience of which the customer wants to be a part of.

## Our role in future proof lighting challenges

We can help you with clear advise on how you can use lighting to your advantage and make sure that it enhances the experience you are trying to create.

We believe that by understanding your needs, we can help you with the goals you want to achieve. Our expertise reaches beyond just producing and selling lighting fixtures. With our bespoke fixtures, we provide tailormade solutions to perfectly support your specific needs and perfectly support your ambitions to grow your business through high quality, smart and future proof lighting.

## Next generation lighting equipment

Keylight has an extensive range of fixtures that make a positive contribution to the shopping experience, which can also have a positive impact on the purchase decision of your customers. Our LED modules can be used by many retailers and are tailor-made to bring out the best in the shop and its collection.

# The right lighting solutions for food stores.

Grocery stores such as bakeries and pastry shops, greengrocers, butchers' shops and seafood shops should not be forgotten either. In this sector, it is essential that the merchandise appear fresh and appetising. Lighting plays a significant role and the right type of lighting has a huge impact on the perception of the products. Food products are subject to discoloration the longer the product is left in display. By using our Food LED modules, we bring out the natural tones in products such as bread, meat and fish and make them appear fresher and tastier.

*In 10 years' time, the retail world has changed substantially. Retail is now a place where online and offline seamlessly merge. Lighting is also rapidly transforming along with the technological revolution and plays a significant role in elevating retail to a new level.*

# Colour accuracy in fashion stores

An excellent example is a fashion store. Colour accuracy is of the utmost importance in this sector. If the clothes are not with the proper lighting colour, the colours of the clothing are not reflected properly. This will have a negative influence on the customer's perception of the colour and therefore has an impact on their decision-making process. That's why we equip our fixtures with the latest Premium Colour LED modules for the fashion industry to bring out the true colours of their products.

# Sensoric lighting

With the use of smart sensors inside your fixtures you can also gather a lot of data about the behaviour of your customers or employees. Retailers can use this data to determine where people spend most of their time inside the stores to see what products and displays generate the most traffic. It can even be used to adjust the lighting to the needs of a specific customer. Inside an office space you could monitor which meeting rooms are used most often and use that information to upgrade other rooms to better spread the usage.

*Lighting is no longer just about illuminating rooms. It is capable of positively influencing our well-being and allows spaces to function as multidisciplinary environments.*

# DALI 2.0 drivers

Most of our products are available with the latest DALI 2.0 drivers and wireless technologies. Making it possible for users to adjust the lighting of any space to their current needs. With this technology a space can have multiple functions which increases flexibility and decreases the amount of rooms needed for different settings. The same meeting room can be used for a presentation, an informal lunch with mood lighting or even a corporate networking event.

# Sustainability

Another important key focus for us is sustainability. Our products are designed to be circular and can be reused after the led module's lifespan has reached their limit or when it needs to be adapted to new technological advancements. The die-cast housings of our luminaires are designed for durability and longevity. The design features of our luminaires enable the LED module to be exchanged rapidly and cost-effectively when it reaches the end of its operational life. Furthermore, efficient airflow also plays a significant role. Optimal heat dissipation preserves the quality of the housing during its operational life. This means you won't have to buy all new fixtures at the full market price to be able to experience the benefits of the latest technology. By using the latest LED technology you will also save a lot of money on electrical expenses since LED fixtures use roughly 80% less electricity than conventional fixtures. If you extend this with daylight harvesting you could save even more. Daylight harvesting is achieved by adapting lumen output of your fixtures to the amount of daylight in the room. On a bright and sunny day there could be so much light inside that your fixtures could be turned off completely. And is big flock of clouds suddenly blocking the sun? No problem, the lighting will seamlessly turned on so nobody is left in the dark.

# Technical lighting collection vol.3

**EVBOX, AMSTERDAM, THE NETHERLANDS**

# RECESSED ROUND

A-POINT, ALMERE, THE NETHERLANDS

**CHARON MINI**
18



**CHARON**
19

**KOTYS**
20

**TRITON**
21



**WHALE**
22

**MOON**
23



**ORBIT R SERIE**
25

**OPTIC**
27



**VISION**
28



**VISION MAXI**
29

**STICK XL**
30

**ROLED**
32

**VENUS R MIDI**
33

**VENUS R MAXI**
34

**CALYPSO S**
35

**CALYPSO O**
36

# CHARON MINI

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **LIGHT SOURCE** | Philips SLM Premium White |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø118 X 57mm |

## OPTIONS

| | | |
|---|---|---|
| **DRIVER OPTIONS** | **Phase cut** 200mA 6-8W<br>Art. no.: 0108.200.20.3 | |
| | **DALI** 200mA 6-11W<br>Art. no.: 0120.200.40.0 | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Hole size




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 4081.100.60.3 | SLM PW | Philips | 1100lm | 8W | 138lm/W | 3000K | >80 | 50.000 Hrs | 225mA |

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **LIGHT SOURCE** | Philips SLM Premium White |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø190 X 78mm |

## OPTIONS

| | | |
|---|---|---|
| **DRIVER OPTIONS** | **Phase cut** 500mA 9-18W<br>Art. no.: 0118.500.20.1 | |
| | **DALI** 500mA 12-20W<br>Art. no.: 0120.500.40.0 | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Hole size




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 4082.240.60.3 | SLM PW | Philips | 2400lm | 20W | 120lm/W | 3000K | >80 | 50.000 Hrs | 500mA |

| | |
|---|---|
| **PRODUCT MATERIAL** | Di-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø163 X 114mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0 | |
| | 36° Art. no.: 3045.036.00.0 | |
| | 60° Art. no.: 3045.060.00.0 | |
| | 80° Art. no.: 3045.080.00.0 | |
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4080.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4080.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4080.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4080.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4080.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4080.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4080.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4080.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4080.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4080.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø174 X 92mm |

## OPTIONS

| | | |
|---|---|---|
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4079.**COB***.60.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4079.**COB***.60.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4079.**COB***.60.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4079.**COB***.60.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4079.**COB***.60.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4079.**COB***.60.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4079.**COB***.60.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4079.**COB***.60.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4079.**COB***.60.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4079.**COB***.60.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 4079.**COB***.60.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4079.**COB***.60.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4079.**COB***.60.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

# WHALE

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø169 X 156mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0 | |
| | 36° Art. no.: 3045.036.00.0 | |
| | 60° Art. no.: 3045.060.00.0 | |
| | 80° Art. no.: 3045.080.00.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS** Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |



Hole size

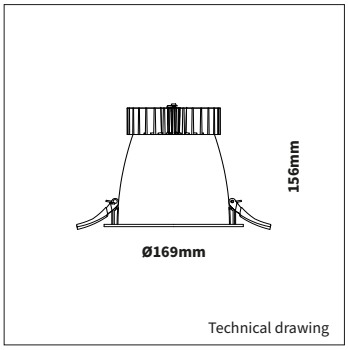

Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4031.**COB***.24.3 | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4031.**COB***.24.3 | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4031.**COB***.24.3 | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4031.**COB***.24.3 | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4031.**COB***.24.3 | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4031.**COB***.24.3 | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4031.**COB***.24.3 | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4031.**COB***.24.3 | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4031.**COB***.24.3 | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4031.**COB***.24.3 | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 4031.**COB***.24.3 | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4031.**COB***.24.3 | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4031.**COB***.24.3 | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and ABS plastics |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø219 X 135mm |

## OPTIONS

| | | |
|---|---|---|
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**




Hole size




Technical drawing

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4019.**COB***.60.3 | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4019.**COB***.60.3 | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4019.**COB***.60.3 | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4019.**COB***.60.3 | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4019.**COB***.60.3 | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4019.**COB***.60.3 | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4019.**COB***.60.3 | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4019.**COB***.60.3 | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4019.**COB***.60.3 | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4019.**COB***.60.3 | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 4019.**COB***.60.3 | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4019.**COB***.60.3 | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4019.**COB***.60.3 | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4019.**COB***.60.3 | 4500lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

THE STUDENT HOTEL, DRESDEN, GERMANY

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT R

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 60.000/L90B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 30 R




Hole size




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| **Opal** | | | | | | | |
| Δ See colors | | | | | | | |
| 4810.300.30.OP.Δ | Ø370mm | 2500lm | 21W | 119lm/W | 3000K | >80 | 10 |
| 4810.300.35.OP.Δ | Ø370mm | 2500lm | 21W | 119lm/W | 3500K | >80 | 10 |
| 4810.300.40.OP.Δ | Ø370mm | 2500lm | 21W | 119lm/W | 4000K | >80 | 10 |
| **UGR<19** | | | | | | | |
| 4810.300.30.MP19.Δ | Ø370mm | 2500lm | 21W | 119lm/W | 3000K | >80 | 10 |
| 4810.300.35.MP19.Δ | Ø370mm | 2500lm | 21W | 119lm/W | 3500K | >80 | 10 |
| 4810.300.40.MP19.Δ | Ø370mm | 2500lm | 21W | 119lm/W | 4000K | >80 | 10 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 65 R




Hole size




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| **Opal** | | | | | | | |
| Δ See colors | | | | | | | |
| 4810.650.30.OP.Δ | Ø725mm | 8500lm | 56W | 152lm/W | 3000K | >80 | 10 |
| 4810.650.35.OP.Δ | Ø725mm | 8500lm | 56W | 152lm/W | 3500K | >80 | 10 |
| 4810.650.40.OP.Δ | Ø725mm | 8500lm | 56W | 152lm/W | 4000K | >80 | 10 |
| **UGR<19** | | | | | | | |
| 4810.650.30.MP19.Δ | Ø725mm | 8500lm | 56W | 152lm/W | 3000K | >80 | 10 |
| 4810.650.35.MP19.Δ | Ø725mm | 8500lm | 56W | 152lm/W | 3500K | >80 | 10 |
| 4810.650.40.MP19.Δ | Ø725mm | 8500lm | 56W | 152lm/W | 4000K | >80 | 10 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 90 R




Hole size




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| **Opal** | | | | | | | |
| Δ See colors | | | | | | | |
| 4810.900.30.OP.Δ | Ø975mm | 12000lm | 76W | 158lm/W | 3000K | >80 | 10 |
| 4810.900.35.OP.Δ | Ø975mm | 12000lm | 76W | 158lm/W | 3500K | >80 | 10 |
| 4810.900.40.OP.Δ | Ø975mm | 12000lm | 76W | 158lm/W | 4000K | >80 | 10 |
| **UGR<19** | | | | | | | |
| 4810.900.30.MP19.Δ | Ø975mm | 12000lm | 76W | 158lm/W | 3000K | >80 | 10 |
| 4810.900.35.MP19.Δ | Ø975mm | 12000lm | 76W | 158lm/W | 3500K | >80 | 10 |
| 4810.900.40.MP19.Δ | Ø975mm | 12000lm | 76W | 158lm/W | 4000K | >80 | 10 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 115 R




Hole size




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| **Opal** | | | | | | | |
| Δ See colors | | | | | | | |
| 4810.115.30.OP.Δ | Ø1180mm | 21000lm | 135W | 156lm/W | 3000K | >80 | 10 |
| 4810.115.35.OP.Δ | Ø1180mm | 21000lm | 135W | 156lm/W | 3500K | >80 | 10 |
| 4810.115.40.OP.Δ | Ø1180mm | 21000lm | 135W | 156lm/W | 4000K | >80 | 10 |
| **UGR<19** | | | | | | | |
| 4810.115.30.MP19.Δ | Ø1180mm | 21000lm | 135W | 156lm/W | 3000K | >80 | 10 |
| 4810.115.35.MP19.Δ | Ø1180mm | 21000lm | 135W | 156lm/W | 3500K | >80 | 10 |
| 4810.115.40.MP19.Δ | Ø1180mm | 21000lm | 135W | 156lm/W | 4000K | >80 | 10 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Rotating 25°, 25° tiltable |
| **SIZE** | Ø140 X 85mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 4413.020.15.0 | |
| | 36° Art. no.: 4413.020.36.0 | |
| | 55° Art. no.: 4413.020.55.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4413.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4413.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4413.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4413.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4413.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4413.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4413.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4413.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4413.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4413.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4413.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4413.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4413.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø146 X 137mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 36° Art. no.: 4391.036.00.0 | |
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIFFUSER** | Art. no.: 0186.999.99.0 | |
| **DIFFUSER RING** | Art. no.: 0188.999.99.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4021.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4021.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4021.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4021.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4021.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4021.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4021.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4021.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4021.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4021.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4021.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 940 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø197 X 162 xmm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 36° Art. no.: 4394.036.00.0<br>60° Art. no.: 4394.060.00.0 | |
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIFFUSER** | Art. no.: 0183.999.99.0 | |
| **DIFFUSER RING** | Wide hole<br>Art. no.: 0189.900.99.0 | |
| | Narrow hole<br>Art. no.: 0189.999.99.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4023.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4023.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4023.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4023.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4023.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4023.**COB***.24.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 4023.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4023.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4023.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# STICK XL

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast Aluminium |
| **LIGHT SOURCE** | Bridgelux V10C |
| **MODULE LIFETIME** | Approx. 35.000 hours |
| **DRIVER** | Excluding driver, **SELECT OPTION** |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 35° |
| **ADJUSTABLE** | Yes - 0-45° - 350° |
| **SIZE** | Ø110 X 136mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 22° Art. no.: 3056.010.22.0 | |
| | 50° Art. no.: 3056.010.50.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3056.922.99.9 | |
| **HONEYCOMB** | Art. no.: 3056.933.94.0 | |
| **DRIVER OPTIONS** | **On/off** 350mA 11-16W<br>Art. no.: 0116.350.10.3 | |
| | **Phase cut** 350mA 6-13W<br>Art. no.: 0113.350.20.1 | |
| | **1/10V** 350mA 0-15W<br>Art. no.: 0115.350.30.0 | |
| | **DALI** 350mA 3-18W<br>Art. no.: 0118.350.40.0 | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |




Hole size




Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## INFORMATION

**Always select a driver option and add the selected driver to your order. Full warranty only applies when fixture is purchased in combination with recommended driver.**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 4920.179.35.Δ | V10C LED | Bridgelux | 1460lm | 12,2W | 120lm/W | 2700K | >90 | 35.000 Hrs | 350mA |
| 4921.179.35.Δ | V10C LED | Bridgelux | 1535lm | 12,2W | 126lm/W | 3000K | >90 | 35.000 Hrs | 350mA |

PRIVATE HOME, ROTTERDAM, THE NETHERLANDS

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø169 X 131mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 12° Art. no.: 4224.012.00.0<br>36° Art. no.: 4224.036.00.0<br>50° Art. no.: 4224.050.00.0 | |
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIFFUSER** | Art. no.: 0182.999.99.0 | |
| **DIFFUSER RING** | Art. no.: 0184.999.99.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4224.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4224.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4224.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4224.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4224.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4224.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4224.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4224.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4224.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4224.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4224.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 940 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

# VENUS R MIDI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Rotating 350°, 55° tiltable |
| **SIZE** | Ø72 X 77mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 3067.010.15.0 | |
| | 36° Art. no.: 3067.010.36.0 | |
| | 45° Art. no.: 3067.010.45.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold mat anti-glare ring<br>Art. no.: 3067.030.00.9 | |
| **HONEYCOMB** | Art. no.: 3067.040.00.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4067.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood | High Efficiency |
| 4067.**COB***.24.Δ | 2000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4067.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4067.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4067.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4067.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# VENUS R MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Rotating 350°, 55° tiltable |
| **SIZE** | Ø90 X 103mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 3068.010.15.0 | |
| | 36° Art. no.: 3068.010.36.0 | |
| | 45° Art. no.: 3068.010.45.0 | |
| | 60° Art. no.: 3068.010.60.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold mat anti-glare ring<br>Art. no.: 3068.030.00.9 | |
| **HONEYCOMB** | Art. no.: 3068.040.00.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4068.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4068.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4068.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4068.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

# CALYPSO S

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø134 X 172mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0 | |
| | 36° Art. no.: 3045.036.00.0 | |
| | 60° Art. no.: 3045.060.00.0 | |
| | 80° Art. no.: 3045.080.00.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4029.**COB***.24.w | 2000lm | Philips SLM G7 | 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4029.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4029.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4029.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4029.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4029.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4029.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4029.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4029.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4029.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4029.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 940 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# CALYPSO O

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø146 X 263mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0 | |
| | 36° Art. no.: 3045.036.00.0 | |
| | 60° Art. no.: 3045.060.00.0 | |
| | 80° Art. no.: 3045.080.00.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4028.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4028.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4028.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4028.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4028.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4028.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4028.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4028.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4028.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4028.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4028.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 940 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

**BASTIAANSEN MODESTAD, BAVEL, THE NETHERLANDS**

# RECESSED SQUARE

NOLTEN, LEIDSCHENDAM, THE NETHERLANDS

**QUADRI**
40

**QUADRI 4**
41

**QUAD**
42

**LUXX**
43

**LUXX 2**
44

**FOX**
45



**INSERT FLAT**
46



**INSERT FLAT PLATINUM**
47

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Osram 5050 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including phase cut dimmable driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **DIMMABLE** | Yes |
| **SIZE** | 53 X 53 X 47mm |

## OPTIONS

| | | | |
|---|---|---|---|
| **DRIVER OPTIONS** | **1/10V** | 150mA 1-8W<br>Art. no.: 0108.140.30.0 | |
| | **DALI** | 150mA 3-8W<br>Art. no.: 0118.150.40.1 | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 1500mm 2 X 0,75 | | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | | |

## INFORMATION

This luminaire is equiped with an innovative lens technology instead of a reflector.

**High quality LED lens technology + 10% more light output.**

**Full warranty only applies when fixture is purchased in combination with recommended driver.**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Hole size




Technical drawing

**Due to the small hole size, the drivers can only be placed externally**

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 4414.215.24.Δ | 5050 | Osram | 600lm | 6W | 100lm/W | 2700K | >90 | 50.000 Hrs | 150mA |
| 4414.315.24.Δ | 5050 | Osram | 600lm | 6W | 100lm/W | 3000K | >90 | 50.000 Hrs | 150mA |

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Osram 5050 |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **SIZE** | 93 X 93 X 47mm |

## OPTIONS

| | | |
|---|---|---|
| **DRIVER OPTIONS** | **Phase cut** | Included |
| | **1/10V** 350mA 0-15W<br>Art. no.: 0115.350.30.0 | |
| | **DALI** 350mA 8-19W<br>Art. no.: 0120.350.40.0 | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 1500mm 2 X 0,75 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |

## INFORMATION

**Full warranty only applies when fixture is purchased in combination with recommended driver.**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Hole size




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 4417.235.24.Δ | 5050 | Cree | 1500lm | 14W | 107lm/W | 2700K | >90 | 50.000 Hrs | 350mA |
| 4417.335.24.Δ | 5050 | Cree | 1500lm | 14W | 107lm/W | 3000K | >90 | 50.000 Hrs | 350mA |

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | 190 X 200 X 145mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 36° | Art. no: 4394.036.00.0 |
| | 60° | Art. no: 4394.060.00.0 |
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIFFUSER** | Art. no.: 0183.999.99.0 | |
| **DIFFUSER RING** | Wide hole<br>Art. no.: 0189.900.99.0 | |
| | Narrow hole<br>Art. no.: 0189.999.99.0 | |
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |




Hole size




Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4394.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4394.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4394.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4394.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4394.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4394.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4394.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4394.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4394.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4394.**COB***.24.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 4394.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4394.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4394.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | 380 X 200 X 145mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 36° Art. no.: 2 X 4394.036.00.0<br>60° Art. no: 2 X 4394.060.00.0 |
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour |
| **DIFFUSER** | Art. no.: 2 X 0183.999.99.0 |
| **DIFFUSER RING** | Wide hole<br>Art. no.: 2 X 0189.900.99.0 |
| | Narrow hole<br>Art. no.: 2 X 0189.999.99.0 |
| **DIMMABLE** | Phase cut dimmable driver |
| | DALI dimmable driver |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75 Included<br>Art. no.: 2 X 0502.075.20.0 |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 2 X 0501.183.20.0 |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 2 X 0500.183.20.0 |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |




Hole size




Technical drawing

**Two separate fixtures mounted in one hole**

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4395.**COB***.24.Δ | 2 X 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4395.**COB***.24.Δ | 2 X 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 73° |
| **ADJUSTABLE** | No |
| **SIZE** | 176 X 176 X 149mm |

## OPTIONS

| | | |
|---|---|---|
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |







## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4488.**COB***.90.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4488.**COB***.90.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4488.**COB***.90.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4488.**COB***.90.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4488.**COB***.90.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4488.**COB***.90.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4488.**COB***.90.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4488.**COB***.90.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4488.**COB***.90.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4488.**COB***.90.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4488.**COB***.90.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4488.**COB***.90.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4488.**COB***.90.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 77° |
| **ADJUSTABLE** | Yes |
| **SIZE** | 180 X 130 X 100mm |

## OPTIONS

| | | |
|---|---|---|
| **DIMMABLE** | Phase cut dimmable driver | |
| | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Hole size




Technical drawing

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4411.**COB***.77.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4411.**COB***.77.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4411.**COB***.77.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4411.**COB***.77.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4411.**COB***.77.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4411.**COB***.77.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4411.**COB***.77.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4411.**COB***.77.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4411.**COB***.77.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4411.**COB***.77.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4411.**COB***.77.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4411.**COB***.77.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4411.**COB***.77.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4411.**COB***.77.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4411.**COB***.77.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

# INSERT FLAT

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and Polycarbonate |
| **LIGHT SOURCE** | LEDD |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9010 white |
| **ADJUSTABLE** | No |
| **SIZE** | 595 X 595 X 55mm |

## OPTIONS

| | | |
|---|---|---|
| **SURFACE FRAME (60 X 60mm)** | Art. no.: 4743.000.00.3 | |
| **PENDENT KIT (1000mm)** | Art. no.: 4743.919.99.1 | |
| **DIMMABLE** | DALI dimmable | On request |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |

## INFORMATION

**High quality PMMA diffuser has excellent durability and is more resistant to UV light discolouration**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | LENGTH | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|---|
| 4743.400.40.3 | Ledline | LEDD | 4000lm | 40W | 100lm/W | 4000K | >80 | 595 X 595mm | 50.000 Hrs | 1050mA |

# INSERT FLAT PLATINUM

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and Polycarbonate |
| **LIGHT SOURCE** | LEDD |
| **MODULE LIFETIME** | Approx. 60.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9010 white |
| **ADJUSTABLE** | No |
| **SIZE** | Different sizes available |

## OPTIONS

| | | |
|---|---|---|
| **SURFACE FRAME (60 X 60MM)** | Art. no.: 4743.000.00.3 | |
| **SUSPENSION KIT (1000MM)** | Art. no.: 4743.919.99.1 | |
| **DIMMABLE** | DALI dimmable | On request |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |

## INFORMATION

**High quality PMMA diffuser has excellent durability and is more resistant to UV light discolouration**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | LENGTH | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|---|
| 4743.300.36.3 | Ledline | LEDD | 4320lm | 36W | 120lm/W | 3000K | >80 | 595 X 595mm | 50.000 Hrs | 900mA |
| 4743.350.36.3 | Ledline | LEDD | 4000lm | 36W | 111lm/W | 3500K | >80 | 595 X 595mm | 50.000 Hrs | 900mA |
| 4743.400.36.3 | Ledline | LEDD | 4320lm | 36W | 120lm/W | 4000K | >80 | 595 X 595mm | 50.000 Hrs | 900mA |
| 4744.300.36.3 | Ledline | LEDD | 4320lm | 36W | 120lm/W | 3000K | >80 | 295 X 1195mm | 50.000 Hrs | 900mA |
| 4744.350.36.3 | Ledline | LEDD | 4000lm | 36W | 111lm/W | 3500K | >80 | 295 X 1195mm | 50.000 Hrs | 900mA |
| 4744.400.36.3 | Ledline | LEDD | 4320lm | 36W | 120lm/W | 4000K | >80 | 295 X 1195mm | 50.000 Hrs | 900mA |

# SURFACE

BY LOTTE, EINDHOVEN, THE NETHERLANDS

**METEOR R MINI**

50



**METEOR R**

51



**METEOR SQ**

52

**LINE ECO**

53

**VAND**

54

**CASK**

55

**BUSS**

56

**BUSS MAXI**

57



**ORBIT SERIE**

59

IP54 CE 3 YEARS WARRANTY

# METEOR R MINI

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and poly-carbonate |
| **LIGHT SOURCE** | SMD LED |
| **MODULE LIFETIME** | Approx. 40.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 120° |
| **REFLECTOR PLATE** | Opal poly-carbonate diffuser |
| **ADJUSTABLE** | No |
| **SIZE** | Ø200 X 48mm |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| 5141.200.12.3 | SMD LED | Epistar | 1120lm | 12W | 94lm/W | 3000K | >80 | 40.000 Hrs |

IP40 IP54 CE 3 YEARS WARRANTY

# METEOR R

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and poly-carbonate |
| **LIGHT SOURCE** | SMD LED |
| **MODULE LIFETIME** | Approx. 40.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 120° |
| **REFLECTOR PLATE** | Opal poly-carbonate diffuser |
| **ADJUSTABLE** | No |
| **SIZE** | Ø300 X 48mm |

## OPTIONS

| | |
|---|---|
| **EMERGENCY MODULE** | Emergency time: 3 hours |
| **SENSOR** | Daylight and microwave sensor |

## INFORMATION

Motion and daylight sensor (SR) and emergency and senor (EM+SR) is IP40, others IP54

SR = Motion and daylight sensor IP40
EM = Emergency module IP54
EM+SR = Emergency and sensor IP40

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | IP | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|---|
| 5142.300.18.3 | SMD LED | Epistar | 1810lm | 18W | 100lm/W | 3000K | >80 | IP54 | 40.000 Hrs |
| 5143.300.18.3SR | SMD LED | Epistar | 1810lm | 18W | 100lm/W | 3000K | >80 | IP40 | 40.000 Hrs |
| 5142.300.18.3EM | SMD LED | Epistar | 1810lm | 18W | 100lm/W | 3000K | >80 | IP54 | 40.000 Hrs |
| 5143.300.18.3EM+SR | SMD LED | Epistar | 1810lm | 18W | 100lm/W | 3000K | >80 | IP40 | 40.000 Hrs |

IP54 CE 3 YEARS WARRANTY

# METEOR SQ

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and poly-carbonate |
| **LIGHT SOURCE** | SMD LED |
| **MODULE LIFETIME** | Approx. 40.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 120° |
| **REFLECTOR PLATE** | Opal poly-carbonate diffuser |
| **ADJUSTABLE** | No |
| **SIZE** | 300 X 300 X 40mm |



## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| 5146.335.18.3 | SMD LED | Epistar | 1620lm | 18W | 90lm/W | 4000K | >80 | 40.000 Hrs |

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel housing, aluminium gear tray |
| **LIGHT SOURCE** | SMD2835 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | ○ **3 =** RAL 9003 white |
| **REFLECTOR** | Opal polycarbonate |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | | |
|---|---|---|
| **DIMMABLE** | DALI dimmable | On request |
| | 1-10V dimmable | On request |
| **EMERGENCY** | Emergency time: 3 hours | |

## INFORMATION

Ripple free driver

EM = Emergency module

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | LENGTH |
|---|---|---|---|---|---|---|---|---|---|
| **Line Eco 60** | | | | | | | | | |
| 5023.060.20.3 | SMD2835 | Everlight | 2000lm | 20W | 100lm/W | 3000K | >80 | 50.000 Hrs | 600mm |
| **Line Eco 120** | | | | | | | | | |
| 5023.121.30.3 | SMD2835 | Everlight | 3000lm | 30W | 100lm/W | 3000K | >80 | 50.000 Hrs | 1200mm |
| 5023.120.30.3 | SMD2835 | Everlight | 3300lm | 30W | 110lm/W | 4000K | >80 | 50.000 Hrs | 1200mm |
| 5023.120.30.3EM | SMD2835 | Everlight | 3300lm | 30W | 110lm/W | 4000K | >80 | 50.000 Hrs | 1200mm |
| **Line Eco 150** | | | | | | | | | |
| 5023.150.45.3 | SMD2835 | Everlight | 5000lm | 45W | 111lm/W | 4000K | >80 | 50.000 Hrs | 1500mm |
| 5023.150.45.3EM | SMD2835 | Everlight | 5000lm | 45W | 111lm/W | 4000K | >80 | 50.000 Hrs | 1500mm |

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and poly carbonate |
| **LIGHT SOURCE** | Samsung SMD 2835 |
| **MODULE LIFETIME** | Approx. 40.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 120° |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **SUSPENSION SET** | 2 Steel wires, standard 1 mtr<br>Art. no.: 5022.999.99.0 |
| **LINKABLE END CAP** | Linkable end cap with wire<br>Art. no.: 5022.230.10.0 |
| **REMOTE CONTROLE** | Remote control for sensor<br>Art. no.: 5022.300.10.0 |
| **EMERGENCY MODULE** | Emergency time: 3 hours |
| **SENSOR** | Motion and daylight sensor |

## INFORMATION

Flicker free TUV certificated driver

Emmergency New Vand is **not** available in linkable type

Motion and daylight sensor should work with 0-10V dimmable led driver (included)

Excluded cables

Including ceiling frame

SR = Motion and daylight sensor
EM = Emergency module

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.



Power connection




Technical drawing

| ARTICLE NUMBER<br>Δ See colors | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | LENGTH |
|---|---|---|---|---|---|---|---|---|---|
| 5022.060.20.6 | SMD 2835 | Samsung | 2000lm | 20W | 100lm/W | 4000K | >80 | 40.000 Hrs | 600mm |
| 5022.120.40.6 | SMD 2835 | Samsung | 5200lm | 40W | 130lm/W | 4000K | >80 | 40.000 Hrs | 1200mm |
| 5022.120.40.6SR | SMD 2835 | Samsung | 5200lm | 40W | 130lm/W | 4000K | >80 | 40.000 Hrs | 1200mm |
| 5022.120.40.6EM | SMD 2835 | Samsung | 5200lm | 40W | 130lm/W | 4000K | >80 | 40.000 Hrs | 1200mm |

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø180 X 254mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0<br>36° Art. no.: 3045.036.00.0<br>60° Art. no.: 3045.060.00.0<br>80° Art. no.: 3045.080.00.0 |
| **DIMMABLE** | DALI dimmable |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm -8000lm SLM on request**

Option pendant version




Technical drawing (Surface mounted)

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 5118.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 5118.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 5118.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 5118.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 5118.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 5118.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 5118.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 5118.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 5118.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 5118.**COB***.24.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 5118.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 5118.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 5118.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 5118.**COB***.24.Δ | 4500lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | DALI 2

# BUSS

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 30.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | 54° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø80 X 165mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **OPTIONAL BEAM ANGLE** | 16°<br>24°<br>36° |
| **DIMMABLE** | DALI dimmable |

## INFORMATION

**Nominal lifetime 50.000/L80B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | |
| 66.00100.83.E.54.Δ | SLM G7 | Phillips | 1300lm | 8W | 163lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00100.84.E.54.Δ | SLM G7 | Phillips | 1300lm | 8W | 163lm/W | 4000K | >80 | 50.000 Hrs |
| 66.00101.83.E.54.Δ | SLM G7 | Phillips | 2000lm | 12W | 167lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00101.84.E.54.Δ | SLM G7 | Phillips | 2000lm | 12W | 167lm/W | 4000K | >80 | 50.000 Hrs |
| 66.00102.83.E.54.Δ | SLM G7 | Phillips | 3000lm | 20W | 138lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00102.84.E.54.Δ | SLM G7 | Phillips | 3000lm | 20W | 138lm/W | 4000K | >80 | 50.000 Hrs |

IP44 5 YEARS WARRANTY DALI 2

# BUSS MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 30.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | 56° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø170 X 175mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **OPTIONAL BEAM ANGLE** | 12°<br>22°<br>36° |
| **DIMMABLE** | DALI dimmable |

## INFORMATION

**Nominal lifetime 50.000/L80B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | |
| 66.00200.83.E.56.CG.Δ | SLM G7 | Phillips | 1300lm | 8W | 163lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00200.84.E.56.CG.Δ | SLM G7 | Phillips | 1300lm | 8W | 163lm/W | 4000K | >80 | 50.000 Hrs |
| 66.00201.83.E.56.CG.Δ | SLM G7 | Phillips | 2000lm | 12W | 167lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00201.84.E.56.CG.Δ | SLM G7 | Phillips | 2000lm | 12W | 167lm/W | 4000K | >80 | 50.000 Hrs |
| 66.00202.83.E.56.CG.Δ | SLM G7 | Phillips | 3000lm | 20W | 138lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00202.84.E.56.CG.Δ | SLM G7 | Phillips | 3000lm | 20W | 138lm/W | 4000K | >80 | 50.000 Hrs |
| 66.00203.83.E.56.CG.Δ | SLM G7 | Phillips | 4000lm | 27W | 138lm/W | 3000K | >80 | 50.000 Hrs |
| 66.00203.84.E.56.CG.Δ | SLM G7 | Phillips | 4000lm | 27W | 138lm/W | 4000K | >80 | 50.000 Hrs |

BY LOTTE, EINDHOVEN, THE NETHERLANDS

# ORBIT

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | Different sizes available |



## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



UP/DN reflected light version

## INFORMATION

**Nominal lifetime 60.000/L90B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

Surface mounted with direct light

Surface mounted with direct/indirect light

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 30



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00005.83.E.OP.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3000K | >80 |
| 66.00005.81.E.OP.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3500K | >80 |
| 66.00005.84.E.OP.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 4000K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR>19** | | | | | | |
| Δ See colors | | | | | | |
| 66.00005.83.E.MP19.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3000K | >80 |
| 66.00005.81.E.MP19.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3500K | >80 |
| 66.00005.84.E.MP19.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 40



Technical drawing UP/DN



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00055.83.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.00055.81.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.00055.84.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |
| **UP/DN reflected light** | | | | | | |
| 66.00011.83.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.00011.81.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.00011.84.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR>19** | | | | | | |
| Δ See colors | | | | | | |
| 66.00055.83.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.00055.81.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.00055.84.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |
| **UP/DN reflected light** | | | | | | |
| 66.00011.83.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.00011.81.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.00011.84.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

# ORBIT 65



Technical drawing UP/DN



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00065.83.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3000K | >80 |
| 66.00065.81.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3500K | >80 |
| 66.00065.84.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 4000K | >80 |
| **UP/DN reflected light** | | | | | | |
| 66.00031.83.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3000K | >80 |
| 66.00031.81.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3500K | >80 |
| 66.00031.84.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

# ORBIT 90



Technical drawing UP/DN



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00050.83.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3000K | >80 |
| 66.00050.81.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3500K | >80 |
| 66.00050.84.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 4000K | >80 |
| **UP/DN reflected light** | | | | | | |
| 66.00051.83.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3000K | >80 |
| 66.00051.81.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3500K | >80 |
| 66.00051.84.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 4000K | >80 |

# TRACK LIGHTING

COEF, LEIDSCHENDAM, THE NETHERLANDS

**VENUS T MIDI**

64

**VENUS T MAXI**

65

**LEDIMO MINI**

66

**LEDIMO MAXI**

68

**TUBO**

69

**CORSO T**

70

**PIPE**

71

**PASO MINI**

74

**PASO**

75

**MONDI**

76

**CALYPSO T**

77

**BUSS T**

78

**STAGE**

79

**ORBIT 50 T**

80

**POWER PLATE T**

81

**TRACKS & ACCESSOIRES**

82

# VENUS T MIDI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter driver |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø72 X 92mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 3067.010.15.0<br>36° Art. no.: 3067.010.36.0<br>45° Art. no.: 3067.010.45.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3067.030.00.9 | |
| **HONEYCOMB** | Art. no.: 3067.040.00.0 | |
| **DIMMABLE** | DALI dimmable | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3067.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3067.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3067.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3067.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3067.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3067.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3067.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# VENUS T MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter driver |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø90 X 114mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 3068.010.15.0<br>36° Art. no.: 3068.010.36.0<br>45° Art. no.: 3068.010.45.0<br>60° Art. no.: 3068.010.60.0 |
| **ANTI-GLARE RING** | Black anti-glare ring — Included<br>Gold anti-glare ring<br>Art. no.: 3068.030.00.9 |
| **HONEYCOMB** | Art. no.: 3068.040.00.0 |
| **DIMMABLE** | DALI dimmable |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3068.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3068.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3068.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3068.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3068.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19

# LEDIMO MINI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø75 X 160mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 36° Art. no.: 3023.036.00.0 |
| **DIMMABLE** | Phase-cut dimmable |
| **DIFFUSER** | Art. no.: 0181.999.99.0 |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3023.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3023.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3023.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3023.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3023.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3023.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3023.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3023.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 /830 / 835 / 840 / 850 / 857 | High Efficiency |
| 3023.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3068.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

**AUTO FLEVO, HARDERWIJK, THE NETHERLANDS**

IP20 | CE | 5 YEARS WARRANTY | UGR <19

# LEDIMO MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø105 X 142mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 12° Art. no.: 3021.012.00.0<br>16° Art. no.: 3021.016.00.0<br>36° Art. no.: 3021.036.00.0<br>50° Art. no.: 3021.050.00.0 |
| **DIFFUSER** | Art. no.: 0180.999.99.0 |
| **DIFFUSER RING** | Art. no.: 0185.999.99.0 |
| **BARNDOOR** | Art. no.: 3020.500.00.5 |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm - 6000lm SLM on request**

**BARNDOOR**

Barndoor

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3020.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3020.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3020.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3020.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3020.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3020.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3020.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3020.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3020.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3020.**COB***.24.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 3020.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3020.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3020.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3020.**COB***.24.Δ | 4500lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø115 X 160mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 12° Art. no.: 3062.012.00.0<br>36° Art. no.: 3062.036.00.0<br>45° Art. no.: 3062.045.00.0 |
| **BARNDOOR** | Art. no.:3062.999.99.5 |
| **DIMMABLE** | DALI dimmable |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**




Technical drawing

**BARNDOOR**

Barndoor

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3062.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3062.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3062.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3062.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3062.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3062.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3062.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3062.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **ADAPTER** | 3-phase track adapter driver |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø78 X 129mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3147.010.18.0<br>36° Art. no.: 3147.010.36.0<br>60° Art. no.: 3147.010.60.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3047.999.00.9 | |
| **HONEYCOMB** | Honeycomb<br>Art. no.: 3084.933.94.0 | |
| **DIMMABLE** | DALI dimmable | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |



Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3147.**COB***.25.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3147.**COB***.25.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3147.**COB***.25.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3147.**COB***.25.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3147.**COB***.25.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3147.**COB***.25.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3147.**COB***.25.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3147.**COB***.25.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø80 X 200mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3057.010.18.0<br>36° Art. no.: 3057.010.36.0<br>45° Art. no.: 3057.010.45.0<br>60° Art. no.: 3057.010.60.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3057.999.00.9 | |
| **HONEYCOMB** | Art. no.: 3057.040.00.0 | |
| **DIMMABLE** | DALI dimmable | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |



Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3057.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3057.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3057.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3057.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3057.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3057.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3057.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3057.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3057.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3057.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 830 / 835 / 840 / 850 / 857 | High Efficiency |
| 3057.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 940 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

**SKINS COSMETICS, LEIDSCHENDAM, THE NETHERLANDS**

MEMO
PARFUMS de MARLY

IP20 | CE | 5 YEARS WARRANTY | DALI 2

# PASO MINI

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **ADAPTER** | 3-phase track adapter |
| **LIGHT SOURCE** | Bridgelux V10 Array |
| **MODULE LIFETIME** | Approx. 30.000 hours |
| **DRIVER** | Including phase cut dimmable driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø63 X 250mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 3049.015.00.0<br>35° Art. no.: 3049.035.00.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3049.999.00.9 | |
| **HONEYCOMB** | Art. no.: 3049.999.94.0 | |
| **DIFFUSER** | Art. no.: 0181.900.99.0 | |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | CCOLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 3049.995.24.Δ | V10 Array | Bridgelux | 950lm | 15W | 64lm/W | 3000K | >90 | 35.000 Hrs | 350mA |
| 3049.996.24.Δ | V10 Array | Bridgelux | 950lm | 15W | 64lm/W | 2000 - 3000K DTW | >90 | 35.000 Hrs | 350mA |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PASO

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 25° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø91 X 220mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3047.018.10.0<br>35° Art. no.: 3047.035.10.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3048.999.00.9 | |
| **HONEYCOMB** | Honeycomb<br>Art. no.: 3084.933.94.0 | |
| **DIMMABLE** | DALI dimmable | |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee | |



Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3048.**COB***.25.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3048.**COB***.25.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3048.**COB***.25.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3048.**COB***.25.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3048.**COB***.25.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3048.**COB***.25.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3048.**COB***.25.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3048.**COB***.25.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# MONDI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø115 X 205mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 12° Art. no.: 4224.012.00.0<br>36° Art. no.: 4224.036.00.0<br>50° Art. no.: 4224.050.00.0 |
| **DIMMABLE** | DALI dimmable |
| **DIFFUSER** | Art. no.: 0182.999.99.0 |
| **DIFFUSER RING** | Art. no.: 0184.999.99.0 |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm - 6000lm SLM on request**




Technical drawing

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3032.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3032.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3032.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3032.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3032.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3032.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3032.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3032.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3032.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3032.**COB***.24.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 3032.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3032.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3032.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3032.**COB***.24.Δ | 4500lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# CALYPSO T

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø95 X 122mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0<br>36° Art. no.: 3045.036.00.0<br>60° Art. no.: 3045.060.00.0<br>80° Art. no.: 3045.080.00.0 |
| **DIMMABLE** | DALI dimmable |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3045.**COB***.24.Δ | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3045.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3045.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3045.**COB***.24.Δ | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3045.**COB***.24.Δ | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3045.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3045.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3045.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3045.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3045.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3045.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3045.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3045.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3045.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3045.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3045.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 940 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY

# BUSS T

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and Aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Tridonic DLA G2 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | 50° |
| **REFLECTOR** | Aluminium glossy |
| **ADJUSTABLE** | No |
| **SIZE** | Ø192 X 140mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request.<br>Additional price + 10% |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5286.700.50.Δ | DLA G2 | Tridonic | 2000lm | 20W | 100lm/W | 3000K | >80 | 50.000 Hrs | 20 |
| 5286.800.50.Δ | DLA G2 | Tridonic | 2000lm | 20W | 100lm/W | 4000K | >80 | 50.000 Hrs | 20 |

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **5 =** RAL 9005 black |
| **BEAM ANGLE** | 25° |
| **ADJUSTABLE** | Horizontally and vertically rotational |
| **SIZE** | Ø158 X 252mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 45° Art. no.: 3054.045.00.0 |
| **HONEYCOMB** | Art. no.: 3054.933.94.0 |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

**HONEYCOMB**

Honeycomb

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 3054.**COB***.23.5 | 1100lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3054.**COB***.23.5 | 1100lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3054.**COB***.23.5 | 1100lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3054.**COB***.23.5 | 1100lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3054.**COB***.23.5 | 1100lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3054.**COB***.23.5 | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 3054.**COB***.23.5 | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3054.**COB***.23.5 | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 3054.**COB***.23.5 | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 3054.**COB***.23.5 | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3054.**COB***.23.5 | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 3054.**COB***.23.5 | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 3054.**COB***.23.5 | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 50 T

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **ADAPTER** | 3-phase track adapter driver |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **ADAPTER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |

## INFORMATION

**Nominal lifetime 60.000/L90B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

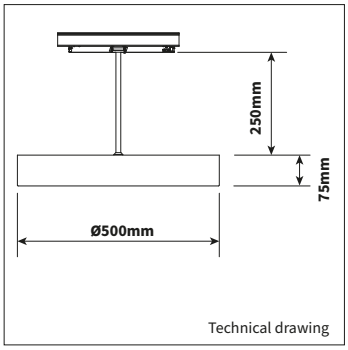

Technical drawing

**DIFFUSER**

White opalic

Microprisma-tic UGR<19

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 65.00120.83.ET.OP.Δ | Ø500mm | 4200lm | 27W | 156lm/W | 3000K | >80 |
| 65.00120.81.ET.OP.Δ | Ø500mm | 4200lm | 27W | 156lm/W | 3500K | >80 |
| 65.00120.84.ET.OP.Δ | Ø500mm | 4200lm | 27W | 156lm/W | 4000K | >80 |
| **UGR>19** | | | | | | |
| 65.00120.83.ET.MP19.Δ | Ø500mm | 4200lm | 27W | 156lm/W | 3000K | >80 |
| 65.00120.81.ET.MP19.Δ | Ø500mm | 4200lm | 27W | 156lm/W | 3500K | >80 |
| 65.00120.84.ET.MP19.Δ | Ø500mm | 4200lm | 27W | 156lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# POWER PLATE T

| | |
|---|---|
| **PRODUCT MATERIAL** | Polycarbonate |
| **ADAPTER** | 3-phase track adapter (Global) |
| **LIGHT SOURCE** | Edison 2835 LED |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 25°-90°-25° |
| **SIZE** | 580 X 42mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | DALI dimmable |

## INFORMATION

**Adjustable lumen, wattage and milliampere**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| 3270.580.40.5 | Ledline | Edison 2835 | 4650-10650lm | 31-71W | 150lm/W | 4000K | >80 | 50.000 Hrs |

# Track & accessoires

# 3 PHASE CONNECTION OVERVIEW

**TOP VIEW**

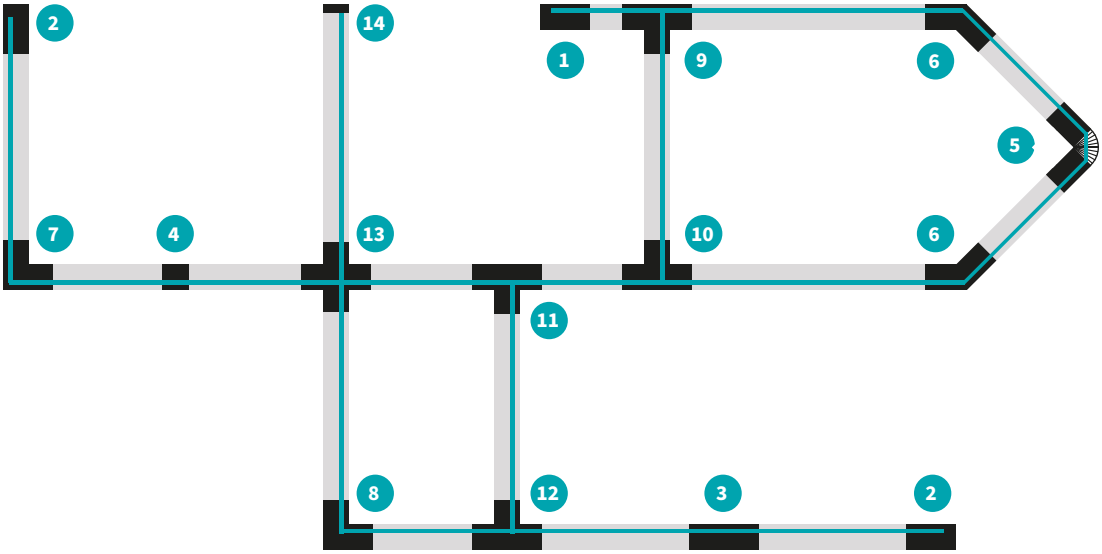


**ACCESSORIES**

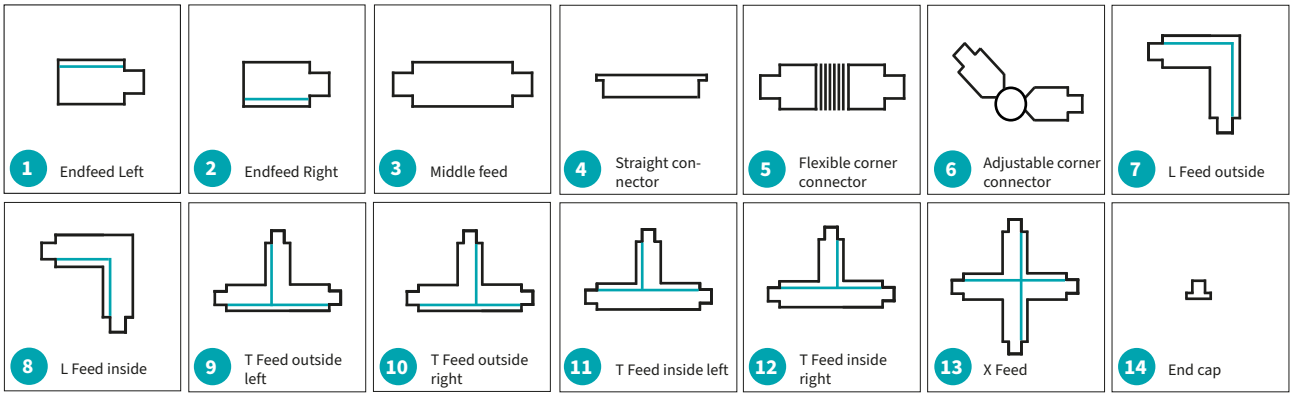


## TECHNICAL DRAWING

Keylight 3 phase track

Surface mounted / pendant



# KEYLIGHT 3 PHASE TRACK & ACCESSORIES

| ARTICLE NUMBER | DESCRIPTION | LENGTH | COLOR |
|---|---|---|---|
| 9631.995.99.3 | Keylight track rail | 1000mm | White |
| 9631.995.99.5 | Keylight track rail | 1000mm | Black |
| 9631.995.99.6 | Keylight track rail | 1000mm | Alu |
| 9632.995.99.3 | Keylight track rail | 2000mm | White |
| 9632.995.99.5 | Keylight track rail | 2000mm | Black |
| 9632.995.99.6 | Keylight track rail | 2000mm | Alu |
| 9633.995.99.3 | Keylight track rail | 3000mm | White |
| 9633.995.99.5 | Keylight track rail | 3000mm | Black |
| 9633.995.99.6 | Keylight track rail | 3000mm | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9652.995.99.3 | Keylight end feed left | 1 | White |
| 9652.995.99.5 | Keylight end feed left | 1 | Black |
| 9652.995.99.6 | Keylight end feed left | 1 | Alu |
| 9651.995.99.3 | Keylight end feed right | 2 | White |
| 9651.995.99.5 | Keylight end feed right | 2 | Black |
| 9651.995.99.6 | Keylight end feed right | 2 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9654.995.99.3 | Keylight middle feed | 3 | White |
| 9654.995.99.5 | Keylight middle feed | 3 | Black |
| 9654.995.99.6 | Keylight middle feed | 3 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9654.996.99.3 | Keylight straight connector | 4 | White |
| 9654.996.99.5 | Keylight straight connector | 4 | Black |
| 9654.996.99.6 | Keylight straight connector | 4 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9667.995.99.3 | Keylight flexible corner connector | 5 | White |
| 9667.995.99.5 | Keylight flexible corner connector | 5 | Black |
| 9667.995.99.6 | Keylight flexible corner connector | 5 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9663.995.99.3 | Keylight adjustable corner connector | 6 | White |
| 9663.995.99.5 | Keylight adjustable corner connector | 6 | Black |
| 9663.995.99.6 | Keylight adjustable corner connector | 6 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9655.995.99.3 | Keylight L feed outside | 7 | White |
| 9655.995.99.5 | Keylight L feed outside | 7 | Black |
| 9655.995.99.6 | Keylight L feed outside | 7 | Alu |
| 9656.995.99.3 | Keylight L feed inside | 8 | White |
| 9656.995.99.5 | Keylight L feed inside | 8 | Black |
| 9656.995.99.6 | Keylight L feed inside | 8 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9661.995.99.3 | Keylight T feed outside left | 9 | White |
| 9661.995.99.5 | Keylight T feed outside left | 9 | Black |
| 9661.995.99.6 | Keylight T feed outside left | 9 | Alu |
| 9657.995.99.3 | Keylight T feed outside right | 10 | White |
| 9657.995.99.5 | Keylight T feed outside right | 10 | Black |
| 9657.995.99.6 | Keylight T feed outside right | 10 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9659.995.99.3 | Keylight T feed inside left | 11 | White |
| 9659.995.99.5 | Keylight T feed inside left | 11 | Black |
| 9659.995.99.6 | Keylight T feed inside left | 11 | Alu |
| 9658.995.99.3 | Keylight T feed inside right | 12 | White |
| 9658.995.99.5 | Keylight T feed inside right | 12 | Black |
| 9658.995.99.6 | Keylight T feed inside right | 12 | Alu |

# KEYLIGHT 3 PHASE TRACK & ACCESSORIES

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9662.995.99.3 | Keylight X feed | 13 | White |
| 9662.995.99.5 | Keylight X feed | 13 | Black |
| 9662.995.99.6 | Keylight X feed | 13 | Alu |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 9664.995.99.3 | Keylight end cap | 14 | White |
| 9664.995.99.5 | Keylight end cap | 14 | Black |
| 9664.995.99.6 | Keylight end cap | 14 | Alu |

| ARTICLE NUMBER | DESCRIPTION | COLOR |
|---|---|---|
| 9691.995.99.3 | Keylight Monopoint | White |
| 9691.995.99.5 | Keylight Monopoint | Black |
| 9691.995.99.6 | Keylight Monopoint | Alu |

| ARTICLE NUMBER | DESCRIPTION | COLOR |
|---|---|---|
| 9696.995.99.3 | Keylight Adapter incl. strain relief | White |
| 9696.995.99.5 | Keylight Adapter incl. strain relief | Black |
| 9696.995.99.6 | Keylight Adapter incl. strain relief | Alu |

| ARTICLE NUMBER | DESCRIPTION | COLOR |
|---|---|---|
| 9665.999.99.3 | Keylight ceiling clamp | White |
| 9665.999.99.5 | Keylight ceiling clamp | Black |
| 9665.999.99.6 | Keylight ceiling clamp | Alu |

| ARTICLE NUMBER | DESCRIPTION | COLOR |
|---|---|---|
| 9672.999.99.3 | Keylight track clamp | White |
| 9672.999.99.5 | Keylight track clamp | Black |
| 9672.999.99.6 | Keylight track clamp | Alu |

| ARTICLE NUMBER | DESCRIPTION | WIRE LENGTH | COLOR |
|---|---|---|---|
| 9687.996.99.3 | Keylight suspension set including cover + clamp | 1500mm | White |
| 9687.996.99.5 | Keylight suspension set including cover + clamp | 1500mm | Black |
| 9687.996.99.6 | Keylight suspension set including cover + clamp | 1500mm | Alu |
| 9687.997.99.3 | Keylight suspension set including cover + clamp | 5000mm | White |
| 9687.997.99.5 | Keylight suspension set including cover + clamp | 5000mm | Black |
| 9687.997.99.6 | Keylight suspension set including cover + clamp | 5000mm | Alu |

| ARTICLE NUMBER | DESCRIPTION | WIRE LENGTH | COLOR |
|---|---|---|---|
| 9688.996.99.3 | Suspension wire + quick release clamp | 1500mm | White |
| 9688.996.99.5 | Suspension wire + quick release clamp | 1500mm | Black |
| 9688.996.99.6 | Suspension wire + quick release clamp | 1500mm | Alu |
| 9688.997.99.3 | Suspension wire + quick release clamp | 5000mm | White |
| 9688.997.99.5 | Suspension wire + quick release clamp | 5000mm | Black |
| 9688.997.99.6 | Suspension wire + quick release clamp | 5000mm | Alu |

# MAGNET 48V SYSTEM

LIGHTBOXX, NIJKERK, THE NETHERLANDS

**MAGNET VENUS NANO**

88

**MAGNET VENUS MICRO**

89

**MAGNET VENUS MINI**

90

**MAGNET VENUS P**

91

**MAGNET PUCK**

92

**MAGNET QUBIC**

93

**MAGNET GLOW**

94

**MAGNET GLOW P**

95

**MAGNET TUBE P**

96

**MAGNET SKY**

97

**MAGNET LINEAR**

98

**DRIVERS 48V**

99

**MAGNET LOW TRACK SYSTEM**

100

**MAGNET HIGH TRACK SYSTEM**

102

**MAGNET RECESSED TRACK SYSTEM**

104

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET VENUS NANO

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Bridgelux BXKC |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø39 X 52mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 5817.020.15.0<br>36° Art. no.: 5817.020.36.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 5817.030.00.9 | |
| **WIRELESS DIMMABLE** | Zigbee or Casambi | |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

**ANTI-GLARE RING**

Black

Gold

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5817.270.24.Δ | BXKC | Bridgelux | 200lm | 3W | 67lm/W | 2700K | >90 | 50.000 Hrs | 350mA |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET VENUS MICRO

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Bridgelux BXKC |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø49 X 61mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 5818.020.15.0<br>36° Art. no.: 5818.020.36.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 5818.030.00.9 | |
| **HONEYCOMB** | Art. no.: 5818.040.00.0 | |
| **WIRELESS DIMMABLE** | Zigbee or Casambi | |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5818.270.24.Δ | BXKC | Bridgelux | 350lm | 5.5W | 64lm/W | 2700K | >90 | 50.000 Hrs | 500mA |
| 5818.300.24.Δ | BXKC | Bridgelux | 350lm | 5.5W | 64lm/W | 3000K | >90 | 50.000 Hrs | 500mA |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET VENUS MINI

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Bridgelux BXKC |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø59 X 73mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 5819.020.15.0<br>36° Art. no.: 5819.020.36.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3066.030.00.9 | |
| **HONEYCOMB** | Art. no.: 3066.040.00.0 | |
| **WIRELESS DIMMABLE** | Zigbee or Casambi | |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5819.270.24.Δ | BXKC | Bridgelux | 750lm | 10W | 75lm/W | 2700K | >90 | 50.000 Hrs | 500mA |
| 5819.300.24.Δ | BXKC | Bridgelux | 750lm | 10W | 75lm/W | 3000K | >90 | 50.000 Hrs | 500mA |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET VENUS P

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Bridgelux BXRV |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 45° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø86 X 1200mm |

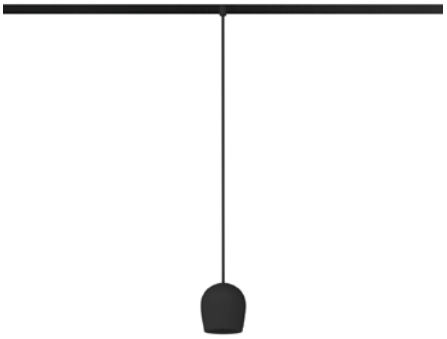

## OPTIONS

| | | |
|---|---|---|
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold anti-glare ring<br>Art. no.: 3067.030.00.9 | |
| **WIRELESS DIMMABLE** | Zigbee or Casambi | |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

Technical drawing

**ANTI-GLARE RING**

Black

Gold

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | | |
| 5816.720.45.Δ | BXRV | Bridgelux | 800lm | 14W | 57lm/W | 1800-3000K | DTW | >90 | 50.000 Hrs | 350mA |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET PUCK

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Bridgelux V8 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 30° 20° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø90 X 30mm |

## OPTIONS

| | |
|---|---|
| **WIRELESS DIMMABLE** | Zigbee or Casambi |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA | DEGREE |
|---|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | | |
| 5825.270.20.Δ | V8 | Bridgelux | 650lm | 10W | 65lm/W | 2700K | >90 | 50.000 Hrs | 350mA | 20° |
| 5825.270.30.Δ | V8 | Bridgelux | 650lm | 10W | 65lm/W | 2700K | >90 | 50.000 Hrs | 350mA | 30° |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET QUBIC

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Bridgelux V8 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 20° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø42 X 105mm |

## OPTIONS

| | | |
|---|---|---|
| **OPTIONAL BEAM ANGLE** | 40° Art. no.: 5827.010.40.0 | |
| **ANTI-GLARE RING** | Black anti-glare ring | Included |
| | Gold mat anti-glare ring<br>Art. no.: 5827.030.00.9 | |
| **HONEYCOMB** | Art. no: 5827.040.00.0 | |
| **WIRELESS DIMMABLE** | Zigbee or Casambi | |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Technical drawing

**ANTI-GLARE RING**

Black

Gold

**HONEYCOMB**

Honeycomb

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5827.270.00.Δ | V8 | Bridgelux | 550lm | 8W | 69lm/W | 2700K | >90 | 50.000 Hrs | 350mA |
| 5827.300.00.Δ | V8 | Bridgelux | 550lm | 8W | 69lm/W | 3000K | >90 | 50.000 Hrs | 350mA |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET GLOW

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Cree XPE2 SMD |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS** | ● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 110° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø150 X 166mm |

## OPTIONS

| | |
|---|---|
| **WIRELESS DIMMABLE** | Zigbee or Casambi |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 5824.270.11.5 | XPE2 SMD | Cree | 294lm | 8W | 37lm/W | 2700K | >90 | 50.000 Hrs | 500mA |

IP20 48V 5 YEARS WARRANTY DALI 2

# MAGNET GLOW P

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Cree XPE2 SMD |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 110° |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **WIRELESS DIMMABLE** | Zigbee or Casambi |

## INFORMATION

Standard including 5000mm wire.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Technical drawing

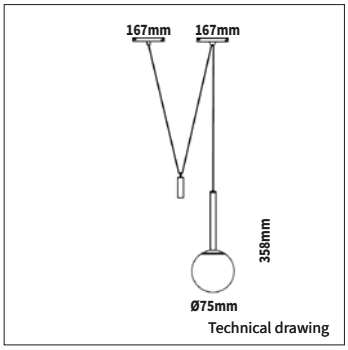

Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5823.270.11.Δ | XPE2 SMD | Cree | 294lm | 8W | 37lm/W | 2700K | >90 | 50.000 Hrs | 500mA |
| Including catrol | | | | | | | | | |
| 5823.270.90.Δ | XPE2 SMD | Cree | 294lm | 8W | 37lm/W | 2700K | >90 | 50.000 Hrs | 500mA |

IP20 | CE | 48V | 5 YEARS WARRANTY | DALI 2

# MAGNET TUBE P

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | Cree XPE2 SMD |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

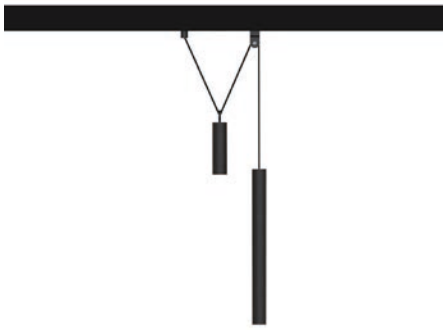

## OPTIONS

| | |
|---|---|
| **WIRELESS DIMMABLE** | Zigbee or Casambi |

## INFORMATION

Standard including 5000mm wire.

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

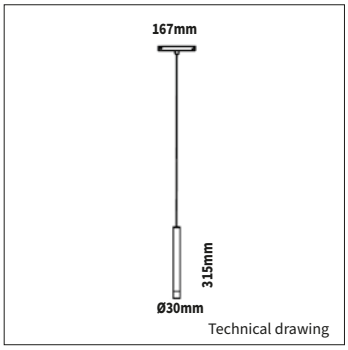

Technical drawing

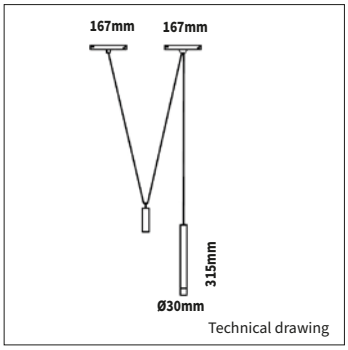

Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | | |
| 5828.270.11.Δ | XPE2 SMD | Cree | 294lm | 8W | 37lm/W | 2700K | >90 | 50.000 Hrs | 500mA |
| Including catrol | | | | | | | | | |
| 5828.270.90.Δ | XPE2 SMD | Cree | 294lm | 8W | 37lm/W | 2700K | >90 | 50.000 Hrs | 500mA |

IP20 48V 5 YEARS WARRANTY DALI 2

# MAGNET SKY

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | SMD 3030 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS** | ● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | No |
| **SIZE** | 583 X 23 X 25mm |

## OPTIONS

| | |
|---|---|
| **WIRELESS DIMMABLE** | Zigbee or Casambi |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 5820.270.60.5 | SMD 3030 | Nichia | 1291lm | 18W | 72lm/W | 2700K | >90 | 50.000 Hrs | 500mA |
| 5820.300.60.5 | SMD 3030 | Nichia | 1291lm | 18W | 72lm/W | 3000K | >90 | 50.000 Hrs | 500mA |

IP20 48V 5 YEARS WARRANTY DALI 2

# MAGNET LINEAR

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **ADAPTER** | 48V adapter |
| **LIGHT SOURCE** | SMD 3030 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including Dali driver |
| **COLORS** | **5 =** RAL 9005 black |
| **BEAM ANGLE** | 95° |
| **ADJUSTABLE** | No |
| **SIZE** | 900/1200 X 23 X 25mm |

## OPTIONS

| | |
|---|---|
| **WIRELESS DIMMABLE** | Zigbee or Casambi |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing Linear 900




Technical drawing Linear 1200

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA | Length |
|---|---|---|---|---|---|---|---|---|---|---|
| 5821.270.90.5 | SMD 3030 | Nichia | 1000-1200lm | 28W | 43lm/W | 2700K | >90 | 50.000 Hrs | 700mA | 900mm |
| 5821.300.90.5 | SMD 3030 | Nichia | 1000-1200lm | 28W | 43lm/W | 3000K | >90 | 50.000 Hrs | 700mA | 900mm |
| 5822.270.90.5 | SMD 3030 | Nichia | 1400-1600lm | 35W | 46lm/W | 2700K | >90 | 50.000 Hrs | 700mA | 1200mm |
| 5822.300.90.5 | SMD 3030 | Nichia | 1400-1600lm | 35W | 46lm/W | 3000K | >90 | 50.000 Hrs | 700mA | 1200mm |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP |
|---|---|---|---|
| 0148.100.10.1 | 48VDC | 100W | IP67 |
| 0148.150.10.1 | 48VDC | 150W | IP67 |
| 0148.240.10.0 | 48VDC | 240W | IP67 |
| 0148.320.10.0 | 48VDC | 320W | IP67 |

**Full warranty only applies when fixture is purchased in combination with recommended driver.**

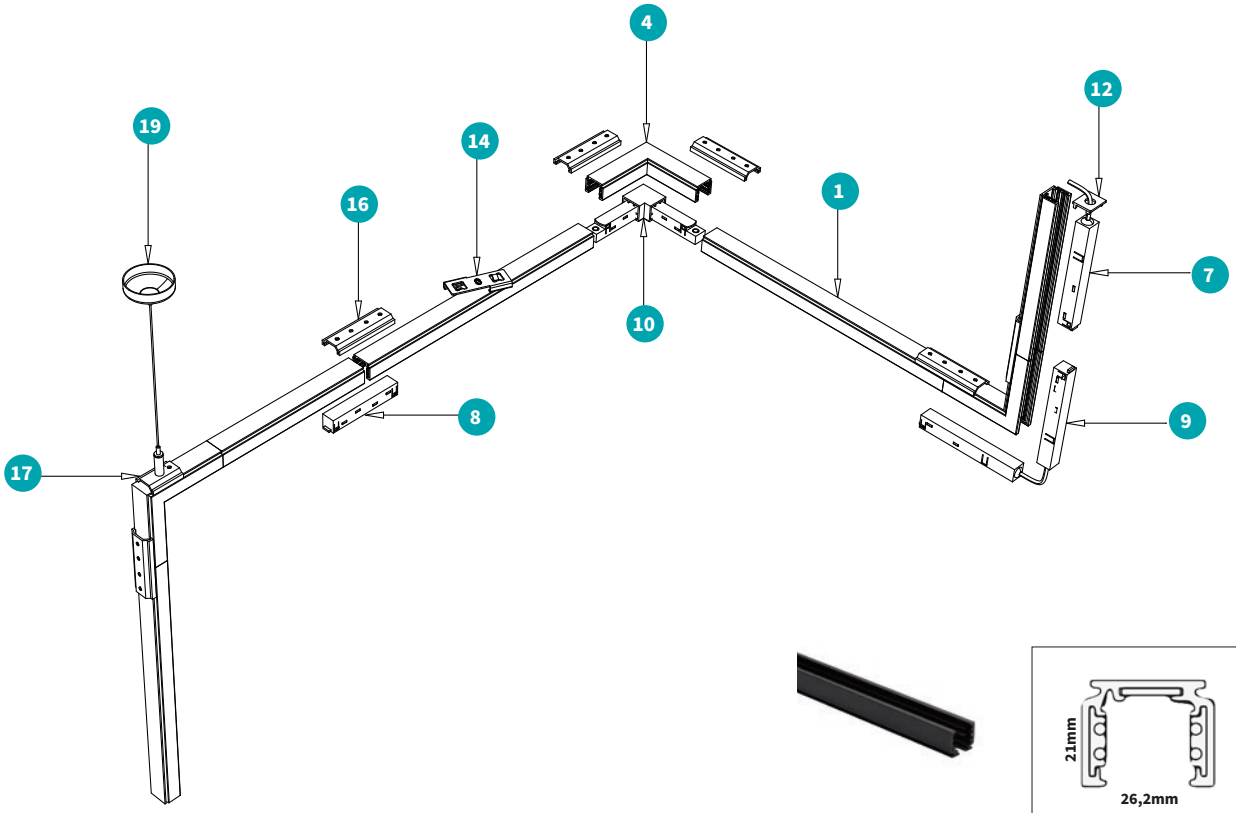







**ACCESSORIES**

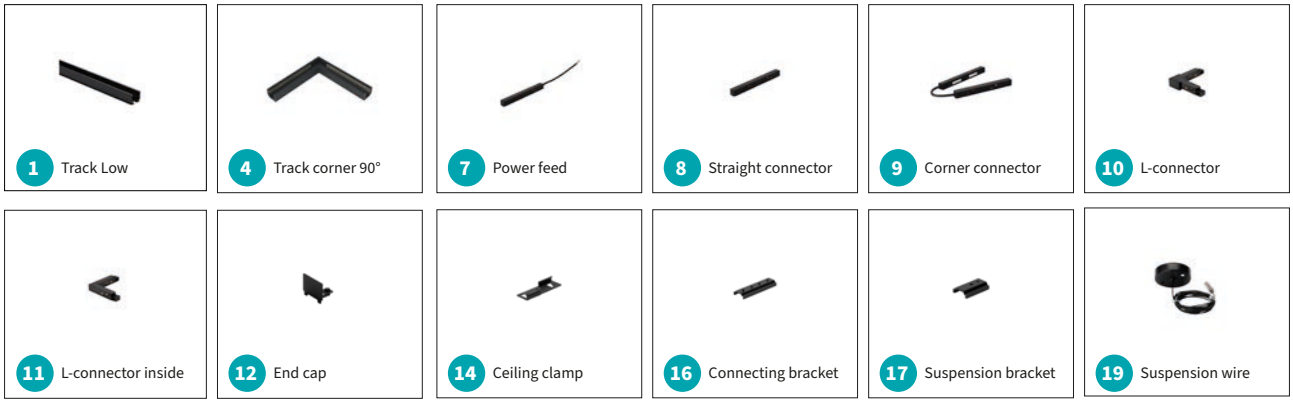

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5833.995.99.3 | Magnet Track Low surface 3000mm White | 1 | White |
| 5833.995.99.5 | Magnet Track Low surface 3000mm Black | 1 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5850.995.99.3 | Magnet Track corner 90° Low White | 4 | White |
| 5850.995.99.5 | Magnet Track corner 90° Low Black | 4 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5852.998.99.3 | Magnet Power feed White incl. 3m cable | 7 | White |
| 5852.998.99.5 | Magnet Power feed Black incl. 3m cable | 7 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5854.998.99.3 | Magnet Straight Connector White | 8 | White |
| 5854.998.99.5 | Magnet Straight Connector Black | 8 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5853.998.99.3 | Magnet Corner Connector White | 9 | White |
| 5853.998.99.5 | Magnet Corner Connector Black | 9 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5851.995.99.3 | Magnet L-connector Low White (Outside corner) | 10 | White |
| 5851.995.99.5 | Magnet L-connector Low Black (Outside corner) | 10 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5851.998.99.3 | Magnet L-connector White (Inside track) | 11 | White |
| 5851.998.99.5 | Magnet L-connector Black (Inside track)<br>**Use when you cut the track in 45 degrees** | 11 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5864.995.99.3 | Magnet End Cap Low White | 12 | White |
| 5864.995.99.5 | Magnet End Cap Low Black | 12 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5865.995.99.3 | Magnet Ceiling Clamp Low White | 14 | White |
| 5865.995.99.5 | Magnet Ceiling Clamp Low Black | 14 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5867.995.99.3 | Magnet Connecting Bracket Low White | 16 | White |
| 5867.995.99.5 | Magnet Connecting Bracket Low Black | 16 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5866.995.99.3 | Magnet Suspension Bracket Low White | 17 | White |
| 5866.995.99.5 | Magnet Suspension Bracket Low Black | 17 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5888.995.99.3 | Magnet Suspension Wire with quick release Clamp 3m White | 19 | White |
| 5888.995.99.5 | Magnet Suspension Wire with quick release Clamp 3m Black | 19 | Black |

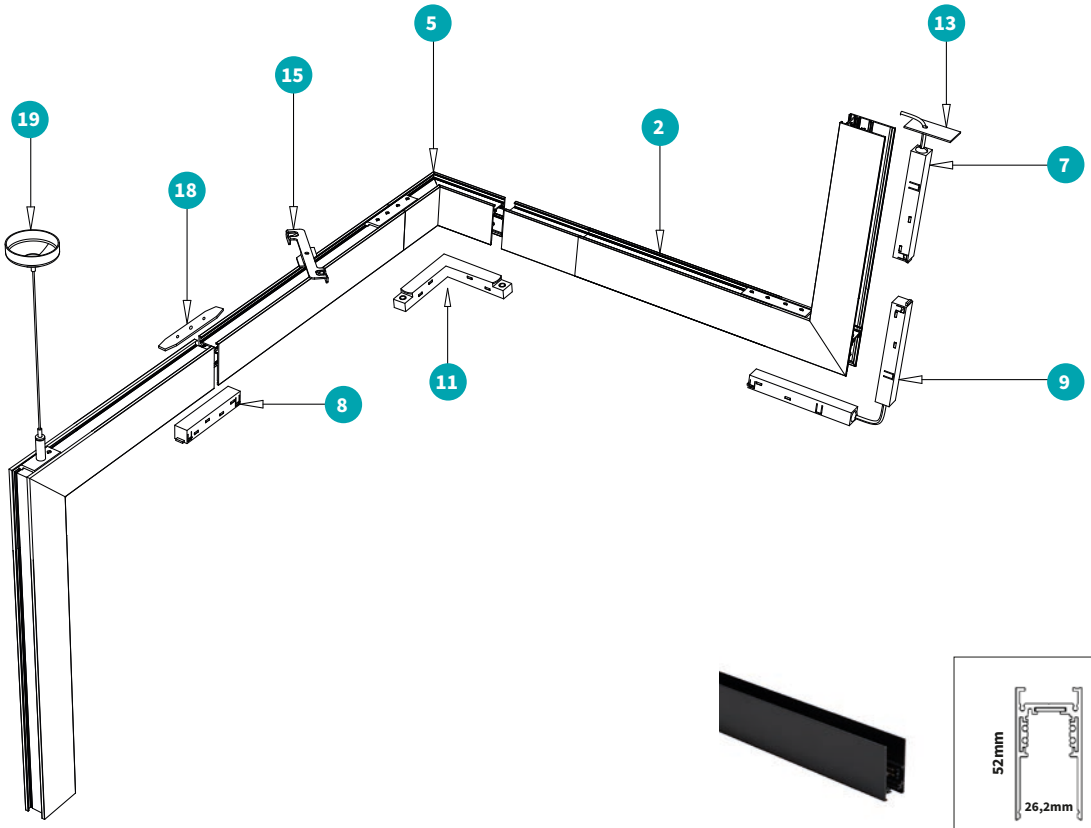







**ACCESSORIES**

2 Track High

5 Track corner 90°

7 Power feed

8 Straight connector

9 Corner connector

11 L-connector inside

13 End cap

15 Ceiling clamp

18 Suspension connecting bracket

19 Suspension wire

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5833.996.99.5 | Magnet Track High surface 3000mm Black | 2 | Black |

| ARTICLE NUMBER | DESCRIPTION | LENGTH | COLOR |
|---|---|---|---|
| 5850.996.99.5 | Magnet Track corner 90° High Black | 5 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5852.998.99.3 | Magnet Power feed White incl. 3m cable | 7 | White |
| 5852.998.99.5 | Magnet Power feed Black incl. 3m cable | 7 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5854.998.99.3 | Magnet Straight Connector White | 8 | White |
| 5854.998.99.5 | Magnet Straight Connector Black | 8 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5853.998.99.3 | Magnet Corner Connector White | 9 | White |
| 5853.998.99.5 | Magnet Corner Connector Black | 9 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5851.998.99.3 | Magnet L-connector White (Inside track) | 11 | White |
| 5851.998.99.5 | Magnet L-connector Black (Inside track)<br>**Use when you cut the track in 45 degrees** | 11 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5864.996.99.5 | Magnet End Cap High/Recessed Black | 13 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5865.996.99.5 | Magnet Ceiling Clamp High/Recessed Black | 15 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5890.996.99.5 | Magnet suspension Connecting Bracket High/Recessed Black | 18 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5888.995.99.3 | Magnet Suspension Wire with quick release Clamp 3m White | 19 | White |
| 5888.995.99.5 | Magnet Suspension Wire with quick release Clamp 3m Black | 19 | Black |

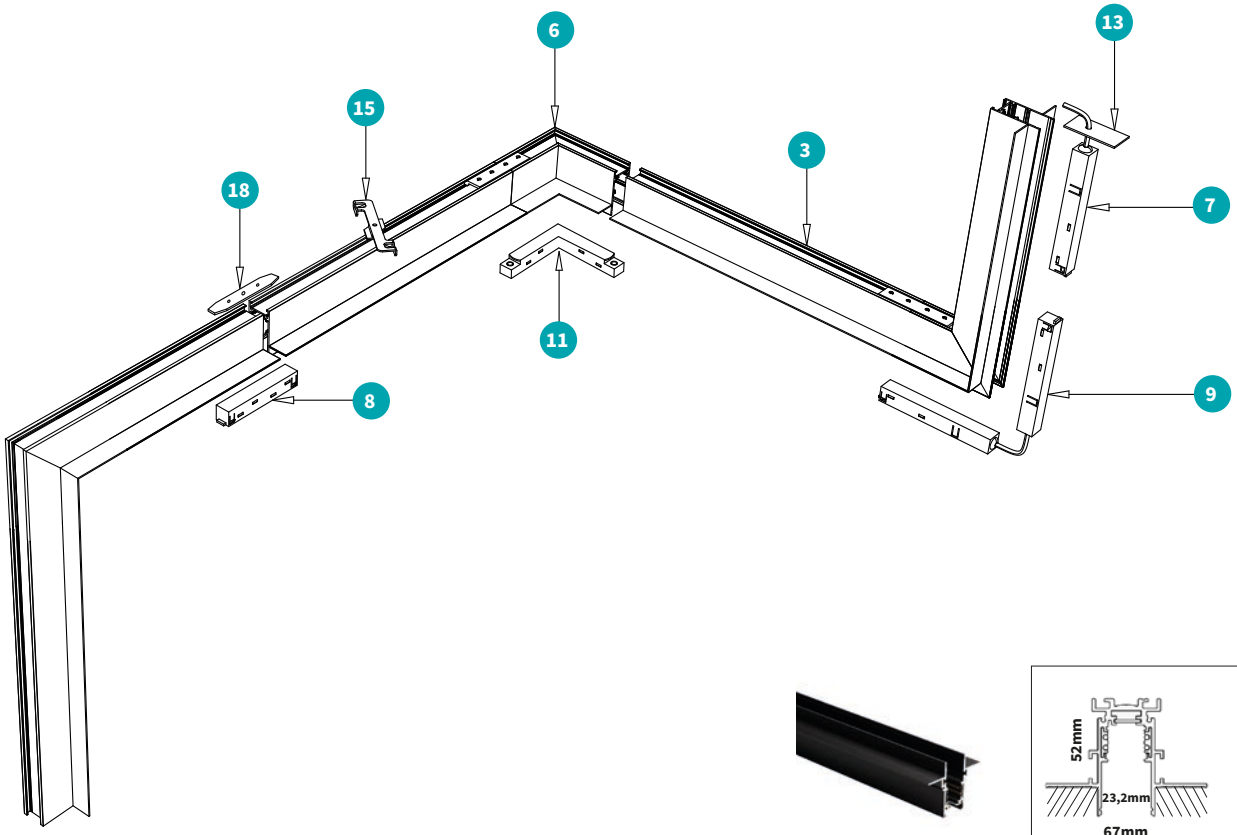







**ACCESSORIES**

3 Track Recessed

6 Track corner 90°

7 Power feed

8 Straight connector

9 Corner connector

11 L-connector inside

13 End cap

15 Ceiling clamp

18 Suspension connecting bracket

# MAGNET RECESSED 48V SYSTEM

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5833.997.99.5 | Magnet Track High recessed 3000mm Black | 3 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5850.997.99.5 | Magnet Track corner 90° Recessed Black | 6 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5852.998.99.3 | Magnet Power feed White incl. 3m cable | 7 | White |
| 5852.998.99.5 | Magnet Power feed Black incl. 3m cable | 7 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5854.998.99.3 | Magnet Straight Connector White | 8 | White |
| 5854.998.99.5 | Magnet Straight Connector Black | 8 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5853.998.99.3 | Magnet Corner Connector White | 9 | White |
| 5853.998.99.5 | Magnet Corner Connector Black | 9 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5851.998.99.3 | Magnet L-connector White (Inside track) | 11 | White |
| 5851.998.99.5 | Magnet L-connector Black (Inside track)<br>**Use when you cut the track in 45 degrees** | 11 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5864.996.99.5 | Magnet End Cap High/Recessed Black | 13 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5865.996.99.5 | Magnet Ceiling Clamp High/Recessed Black | 15 | Black |

| ARTICLE NUMBER | DESCRIPTION | ACCESSORY NUMBER | COLOR |
|---|---|---|---|
| 5890.996.99.5 | Magnet suspension Connecting Bracket High/Recessed Black | 18 | Black |

# PENDANT

EVBOX, AMSTERDAM, THE NETHERLANDS

**CASK P**

108

**BOOST 50**

109

**POWER PLATE P**

110



**ORBIT P SERIE**

111



**SLIMMY P SERIE**

115

**SLIMMY SPOT**

119



**PROFILE C SERIE**

120

**NOMO P SERIE**

122

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# CASK P

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø180 X 254mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 18° Art. no.: 3045.018.00.0<br>36° Art. no.: 3045.036.00.0<br>60° Art. no.: 3045.060.00.0<br>80° Art. no.: 3045.080.00.0 |
| **DIMMABLE** | DALI dimmable |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm -8000lm SLM on request**

Option surface mounted version




Technical drawing

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER<br>Δ See colors | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 5119.**COB***.24.Δ | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 5119.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 5119.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 5119.**COB***.24.Δ | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 5119.**COB***.24.Δ | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 5119.**COB***.24.Δ | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 5119.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 5119.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 5119.**COB***.24.Δ | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 5119.**COB***.24.Δ | 3000lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |
| 5119.**COB***.24.Δ | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 5119.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 5119.**COB***.24.Δ | 4500lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 5119.**COB***.24.Δ | 4500lm | Philips SLM G7 | Food: Meat / Bakery | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

# BOOST 50

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips DLM ES / DLM Flex |
| **MODULE LIFETIME** | Approx 50.000 hours |
| **DRIVER DLM** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Acrilic |
| **SIZE** | 515 X 292mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | DALI dimmable |
| **IP CLASS** | IP20 in standard, IP44 on request |

## INFORMATION

Including 1500mm steel wire suspension with wire length control

**Also available Boost 40 (Ø415mm) or Boost 30 (Ø315mm) on request**

Keylight International reserves the right to modify or change technical, contruction or LED specifications due to continuous improvements of our products and lightsources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER<br>Δ See colors | LAMP TYPE | LUMEN | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | INPUT VOLTAGE | TC | TC LIFETIME | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|---|---|---|
| 7515.281.00.Δ | Osram Cube AC | 1100lm | 10W | 110lm/W | 3000K | >80 | 230V | 85°C | 50.000 Hrs | 10 |
| 7515.282.00.Δ | Osram Cube AC | 1100lm | 10W | 110lm/W | 4000K | >80 | 230V | 85°C | 50.000 Hrs | 10 |
| 7515.283.00.Δ | Osram Cube AC | 2000lm | 18W | 111lm/W | 3000K | >80 | 230V | 85°C | 50.000 Hrs | 10 |
| 7515.284.00.Δ | Osram Cube AC | 2000lm | 18W | 111lm/W | 4000K | >80 | 230V | 85°C | 50.000 Hrs | 10 |
| 7515.285.00.Δ | Osram Cube AC | 3000lm | 27W | 111lm/W | 3000K | >80 | 230V | 85°C | 50.000 Hrs | 10 |
| 7515.286.00.Δ | Osram Cube AC | 3000lm | 27W | 111lm/W | 4000K | >80 | 230V | 85°C | 50.000 Hrs | 10 |

| ARTICLE NUMBER<br>Δ See colors | LAMP TYPE | LUMEN | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | INPUT VOLTAGE | TC | TC LIFETIME | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|---|---|---|
| 7515.101.00.Δ | Philips Fortimo DLM flex | 1300lm | 12W | 108lm/W | 3000K | >80 | 34V | 85°C | 50.000 Hrs | 10 |
| 7515.102.00.Δ | Philips Fortimo DLM flex | 1300lm | 12W | 108lm/W | 4000K | >80 | 34V | 85°C | 50.000 Hrs | 10 |
| 7515.103.00.Δ | Philips Fortimo DLM flex | 2100lm | 19W | 110lm/W | 3000K | >80 | 34V | 85°C | 50.000 Hrs | 10 |
| 7515.104.00.Δ | Philips Fortimo DLM flex | 2100lm | 19W | 110lm/W | 4000K | >80 | 34V | 85°C | 50.000 Hrs | 10 |
| 7515.105.00.Δ | Philips Fortimo DLM flex | 3200lm | 29W | 110lm/W | 3000K | >80 | 34V | 85°C | 50.000 Hrs | 10 |
| 7515.106.00.Δ | Philips Fortimo DLM flex | 3200lm | 29W | 110lm/W | 4000K | >80 | 34V | 85°C | 50.000 Hrs | 10 |

IP40 | 5 YEARS WARRANTY | UGR <19 | DALI 2

# POWER PLATE P

| | |
|---|---|
| **PRODUCT MATERIAL** | Polycarbonate |
| **LIGHT SOURCE** | Edison 2835 LED |
| **MODULE LIFETIME** | Approx 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **BEAM ANGLE** | 25°- 90°-25° |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | DALI dimmable |

## INFORMATION

**Adjustable lumen, wattage and milliampere**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | |
| 9270.580.40.5 | Ledline | Edison 2835 | 4650 - 10650lm | 31 - 71W | 150lm/W | 4000K | >80 | 50.000 Hrs |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT P

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

UP/DN with add. boards

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 60.000/L90B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

Surface mounted with direct light

Surface mounted with direct/indirect light

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT P 30



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00006.83.E.OP.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3000K | >80 |
| 66.00006.81.E.OP.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3500K | >80 |
| 66.00006.84.E.OP.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 4000K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19** | | | | | | |
| Δ See colors | | | | | | |
| 66.00006.83.E.MP19.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3000K | >80 |
| 66.00006.81.E.MP19.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 3500K | >80 |
| 66.00006.84.E.MP19.Δ | Ø300mm | 3000lm | 20W | 150lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT P 40



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00012.83.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.00012.81.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.00012.84.E.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |
| **UP/DN With add. boards** | | | | | | |
| 66.00013.83.E.OP.Δ | Ø425mm | 7700lm | 48W | 160lm/W | 3000K | >80 |
| 66.00013.81.E.OP.Δ | Ø425mm | 7700lm | 48W | 160lm/W | 3500K | >80 |
| 66.00013.84.E.OP.Δ | Ø425mm | 7700lm | 48W | 160lm/W | 4000K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19** | | | | | | |
| Δ See colors | | | | | | |
| 66.00012.83.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.00012.81.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.00012.84.E.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |
| **UP/DN With add. boards** | | | | | | |
| 66.00013.83.E.MP19.Δ | Ø425mm | 7700lm | 48W | 160lm/W | 3000K | >80 |
| 66.00013.81.E.MP19.Δ | Ø425mm | 7700lm | 48W | 160lm/W | 3500K | >80 |
| 66.00013.84.E.MP19.Δ | Ø425mm | 7700lm | 48W | 160lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY DALI 2

## ORBIT P 65



Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00032.83.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3000K | >80 |
| 66.00032.81.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3500K | >80 |
| 66.00032.84.E.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 4000K | >80 |
| **UP/DN With add. boards** | | | | | | |
| 66.00033.83.E.OP.Δ | Ø650mm | 11800lm | 79W | 149lm/W | 3000K | >80 |
| 66.00033.81.E.OP.Δ | Ø650mm | 11800lm | 79W | 149lm/W | 3500K | >80 |
| 66.00033.84.E.OP.Δ | Ø650mm | 11800lm | 79W | 149lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY DALI 2

## ORBIT P 90



Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00052.83.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3000K | >80 |
| 66.00052.81.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3500K | >80 |
| 66.00052.84.E.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 4000K | >80 |
| **UP/DN with add. boards** | | | | | | |
| 66.00053.83.E.OP.Δ | Ø900mm | 16400lm | 100W | 164lm/W | 3000K | >80 |
| 66.00053.81.E.OP.Δ | Ø900mm | 16400lm | 100W | 164lm/W | 3500K | >80 |
| 66.00053.84.E.OP.Δ | Ø900mm | 16400lm | 100W | 164lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY DALI 2

## ORBIT P 110



Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.00095.83.E.OP.Δ | Ø900mm | 21000lm | 135W | 156lm/W | 3000K | >80 |
| 66.00095.81.E.OP.Δ | Ø900mm | 21000lm | 135W | 156lm/W | 3500K | >80 |
| 66.00095.84.E.OP.Δ | Ø900mm | 21000lm | 135W | 156lm/W | 4000K | >80 |
| **UP/DN with add. boards** | | | | | | |
| 66.00071.83.E.OP.Δ | Ø900mm | 26500lm | 171W | 155lm/W | 3000K | >80 |
| 66.00071.81.E.OP.Δ | Ø900mm | 26500lm | 171W | 155lm/W | 3500K | >80 |
| 66.00071.84.E.OP.Δ | Ø900mm | 26500lm | 171W | 155lm/W | 4000K | >80 |

DURA VERMEER HEADQUARTERS, UTRECHT, THE NETHERLANDS

# SLIMMY P

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

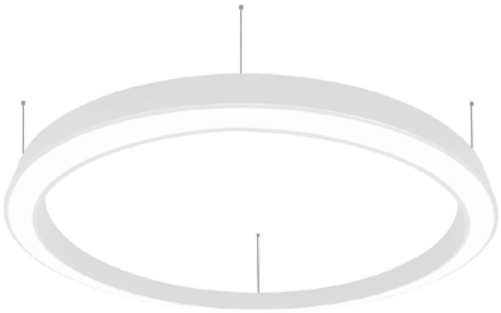

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Pendant with direct light

Pendant with direct/indirect light

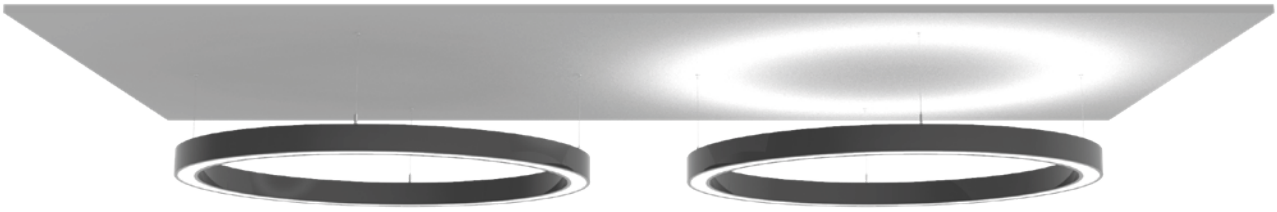

IP20 5 YEARS WARRANTY DALI 2

## SLIMMY P 65




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 50.00010.82.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 2700K | >80 |
| 50.00010.83.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 3000K | >80 |
| 50.00010.81.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 3500K | >80 |
| 50.00010.84.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 50.00020.82.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 2700K | >80 |
| 50.00020.83.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 3000K | >80 |
| 50.00020.81.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 3500K | >80 |
| 50.00020.84.E.OP.Δ | Ø650mm | 6600lm | 40W | 165lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

## SLIMMY P 90




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 50.00030.82.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 2700K | >80 |
| 50.00030.83.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 3000K | >80 |
| 50.00030.81.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 3500K | >80 |
| 50.00030.84.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 50.00040.82.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 2700K | >80 |
| 50.00040.83.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 3000K | >80 |
| 50.00040.81.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 3500K | >80 |
| 50.00040.84.E.OP.Δ | Ø900mm | 9900lm | 60W | 165lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

## SLIMMY P 120




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 50.00050.82.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 2700K | >80 |
| 50.00050.83.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 3000K | >80 |
| 50.00050.81.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 3500K | >80 |
| 50.00050.84.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 50.00060.82.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 2700K | >80 |
| 50.00060.83.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 3000K | >80 |
| 50.00060.81.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 3500K | >80 |
| 50.00060.84.E.OP.Δ | Ø1200mm | 13200lm | 80W | 165lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI

## SLIMMY P 150




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 50.00070.82.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 2700K | >80 |
| 50.00070.83.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 3000K | >80 |
| 50.00070.81.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 3500K | >80 |
| 50.00070.84.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 50.00080.82.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 2700K | >80 |
| 50.00080.83.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 3000K | >80 |
| 50.00080.81.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 3500K | >80 |
| 50.00080.84.E.OP.Δ | Ø1500mm | 16500lm | 99W | 167lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI

## SLIMMY P 180




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 50.00090.82.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 2700K | >80 |
| 50.00090.83.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 3000K | >80 |
| 50.00090.81.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 3500K | >80 |
| 50.00090.84.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 50.00100.82.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 2700K | >80 |
| 50.00100.83.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 3000K | >80 |
| 50.00100.81.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 3500K | >80 |
| 50.00100.84.E.OP.Δ | Ø1800mm | 19800lm | 118W | 168lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI

## SLIMMY P 210




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 7730.210.27.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 2700K | >80 |
| 7730.210.30.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 3000K | >80 |
| 7730.210.35.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 3500K | >80 |
| 7730.210.40.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 7731.210.27.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 2700K | >80 |
| 7731.210.30.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 3000K | >80 |
| 7731.210.35.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 3500K | >80 |
| 7731.210.40.Δ | Ø2100mm | 24000lm | 144W | 167lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY DALI 2

## SLIMMY P 250




Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 7730.250.27.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 2700K | >80 |
| 7730.250.30.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 3000K | >80 |
| 7730.250.35.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 3500K | >80 |
| 7730.250.40.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 7731.250.27.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 2700K | >80 |
| 7731.250.30.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 3000K | >80 |
| 7731.250.35.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 3500K | >80 |
| 7731.250.40.Δ | Ø2500mm | 17000lm | 102W | 167lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY DALI 2

## SLIMMY P 310




Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 7730.310.27.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 2700K | >80 |
| 7730.310.30.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 3000K | >80 |
| 7730.310.35.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 3500K | >80 |
| 7730.310.40.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 7731.310.27.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 2700K | >80 |
| 7731.310.30.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 3000K | >80 |
| 7731.310.35.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 3500K | >80 |
| 7731.310.40.Δ | Ø3100mm | 20000lm | 122W | 164lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY DALI 2

## SLIMMY P 500




Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 7730.500.27.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 2700K | >80 |
| 7730.500.30.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 3000K | >80 |
| 7730.500.35.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 3500K | >80 |
| 7730.500.40.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 4000K | >80 |

### UP/DN reflected light

| | | | | | | |
|---|---|---|---|---|---|---|
| 7731.500.27.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 2700K | >80 |
| 7731.500.30.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 3000K | >80 |
| 7731.500.35.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 3500K | >80 |
| 7731.500.40.Δ | Ø5000mm | 33000lm | 195W | 169lm/W | 4000K | >80 |

# SLIMMY SPOT

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips SLM LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium glossy |
| **DIFFUSER** | Clear glass |
| **SIZE** | Ø2500 X 90mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set included |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 7733.000.30.Δ | Ø2500mm | 14400lm | 120W | 120lm/W | 3000K | >80 |
| 7733.000.40.Δ | Ø2500mm | 14400lm | 120W | 120lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

# PROFILE C

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | See technical drawing |

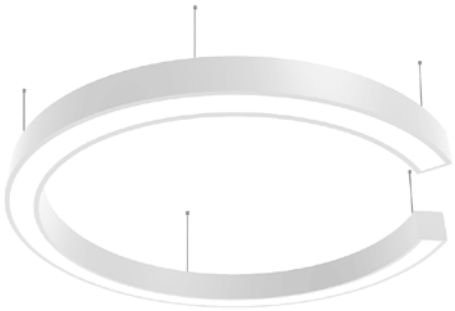

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



PROFILE C 90 Technical drawing

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

IP20 5 YEARS WARRANTY DALI 2

# PROFILE C 90

| ARTICLE NUMBER | DIAMETER | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| **PROFILE C 90**<br>Δ See colors | | | | | | | |
| 9280.120.30.Δ | Ø 1200mm | 11000lm | 73W | 151lm/W | 3000K | >80 | 5 |
| 9280.120.35.Δ | Ø 1200mm | 11000lm | 73W | 151lm/W | 3500K | >80 | 5 |
| 9280.120.40.Δ | Ø 1200mm | 11000lm | 73W | 151lm/W | 4000K | >80 | 5 |

IP20 5 YEARS WARRANTY DALI 2

## PROFILE C 75



Technical drawing

| ARTICLE NUMBER<br>**PROFILE C 75**<br>Δ See colors | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| 9281.120.30.Δ | Ø 1200mm | 9900lm | 60W | 165lm/W | 3000K | >80 | 5 |
| 9281.120.35.Δ | Ø 1200mm | 9900lm | 60W | 165lm/W | 3500K | >80 | 5 |
| 9281.120.40.Δ | Ø 1200mm | 9900lm | 60W | 165lm/W | 4000K | >80 | 5 |

IP20 5 YEARS WARRANTY DALI 2

## PROFILE C 50



Technical drawing

| ARTICLE NUMBER<br>**PROFILE C 50**<br>Δ See colors | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| 9282.120.30.Δ | Ø 1200mm | 6600lm | 41W | 161lm/W | 3000K | >80 | 5 |
| 9282.120.35.Δ | Ø 1200mm | 6600lm | 41W | 161lm/W | 3500K | >80 | 5 |
| 9282.120.40.Δ | Ø 1200mm | 6600lm | 41W | 161lm/W | 4000K | >80 | 5 |

IP20 5 YEARS WARRANTY DALI 2

## PROFILE C 25



Technical drawing



| ARTICLE NUMBER<br>**PROFILE C 25**<br>Δ See colors | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|
| 9283.120.30.Δ | Ø 1200mm | 3300lm | 22W | 150lm/W | 3000K | >80 | 5 |
| 9283.120.35.Δ | Ø 1200mm | 3300lm | 22W | 150lm/W | 3500K | >80 | 5 |
| 9283.120.40.Δ | Ø 1200mm | 3300lm | 22W | 150lm/W | 4000K | >80 | 5 |

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | See technical drawing |

Acoustic diffusers

OPTION NOMO

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set included |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

OPTION NOMO

BARRISOL®
WORLD N°1 MONDIAL

NOMO suspended direct or direct / indirect luminaires are available with wide variety of original BARRISOLsheets including BARRISOL acoustic materials. Please contact our sales department for further details.

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

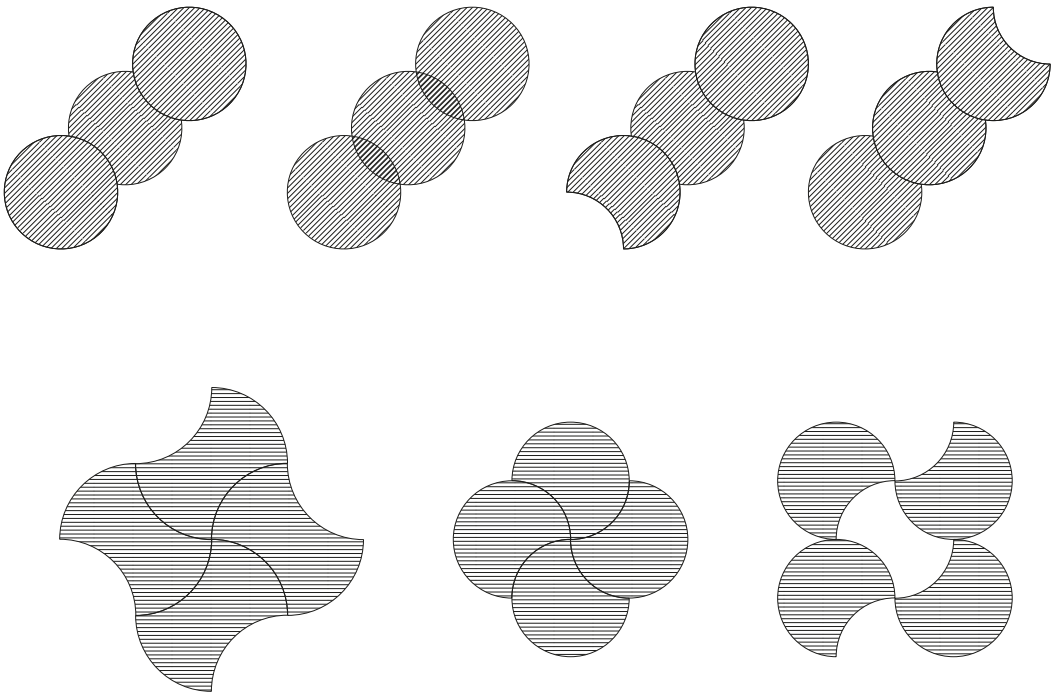

IP20 CE 5 YEARS WARRANTY

## NOMO P 1



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 9247.120.30.Δ | Ø1200mm | 9900lm | 90W | 110lm/W | 3000K | >80 |
| 9247.120.35.Δ | Ø1200mm | 9900lm | 90W | 110lm/W | 3500K | >80 |
| 9247.120.40.Δ | Ø1200mm | 9900lm | 90W | 110lm/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY

## NOMO P 2



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 9248.120.30.Δ | Ø1200mm | 8200lm | 76W | 108m/W | 3000K | >80 |
| 9248.120.35.Δ | Ø1200mm | 8200lm | 76W | 108m/W | 3500K | >80 |
| 9248.120.40.Δ | Ø1200mm | 8200lm | 76W | 108m/W | 4000K | >80 |

IP20 CE 5 YEARS WARRANTY

## NOMO P 3



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 9249.120.30.Δ | Ø1200mm | 6600lm | 61W | 108m/W | 3000K | >80 |
| 9249.120.35.Δ | Ø1200mm | 6600lm | 61W | 108m/W | 3500K | >80 |
| 9249.120.40.Δ | Ø1200mm | 6600lm | 61W | 108m/W | 4000K | >80 |

# INTELLIGENT LIGHTING

5CA HEADQUARTERS, UTRECHT, NETHERLANDS

**ORBIT SR SERIE**

130



**PROFILE 400 SR**

134



**PROFILE 400 P SR**

136



**PROFILE 500 SR**

138



**PROFILE 600 SR**

140



**PROFILE 600 P SR**

142

**PROFILE 500 RECESSED SR**

144

**SHELL SR**

146



**QUBEE 60 SR**

147

# Human centric lighting

"With the fast growing interest in HCL, it's clear that we are heading into a future where we simply expect tunable light in the spaces where we spend most of our time".

Smart lighting is rapidly becoming one of the large pilars in modern buildings, cities and the Internet of Things. Human centric lighting (HCL), a market estimated to reach $3.91 billion by 2024, is one of the fastest growing parts of the smart lighting industry. Now that tunable white light is defined as part of the Sensor Ready (SR) standard, it won't take long before HCL is ready to go mainstream.

**What is human centric lighting?**

Nowadays there is an increasing amount of evidence that lighting has a very large effect on people. It doesn't just help us see, it also stimulates us and impacts how we feel and behave. Human centric lighting (also known as HCL) refers to lighting that's centered around the human user and is a part of human centric design. It focuses on the influence lighthing has on the human circadian rhythm or biological clock.

This 24 hour cycle of the sun influences who we are, what we do and how we feel. HCL has the power to adjust our circadian rhythm and influence our motivation, well-being and productivity. Our physical response to light depends on the different characteristics of this light including color, intensity and timing.

Since we are spending more and more time indoors, artificial lighting is becoming of increasing importance. HCL solutions can support our human biological rhythm, improve concentration, prevent sleeping disorders and improve our overall well-being. Lighting doesn't only help us 'see', it also serves as a time reference for our internal biological clock.

**What are the possibilities?**

Having the right lighting in the morning, with adequate intensity and cyan enhanced light, can help you get ready for the day ahead. In educational and office spaces an active mind is of the utmost importance for the best focus and concentration. Brighter light can be used to regulate and influence the circadian rhythm of employees and students and to increase focus and alertness during important meetings and tests with brighter light. During relaxing times, events and meetings the lights can be dimmed and have a warm color to create a calm and relaxing environment. A semi-automatic control system where parts of the daily cycle are automated is the best option in these fields. For example in the morning when you start up your day with warm light that during the day gets colder and and brighter to keep the attention. The system is also able to adjust its own settings depending on the weather forecast to facilitate the best possible conditions for the optimal work environment.

**What's the future?**

With the fast growing interest in HCL, it's clear that we are heading into a future where we simply expect tunable light to be present in the spaces where we spend most of our time. Especially for business and institutional spaces, tunable lighting will be incorporated at the start and designed carefully around the organizational goals and the needs of its participants.

Something that will add even more value to HCL, is the ability to personalize the lighting so it suits our different visual and task-specific needs. This will be made as easy as possible with the use of a smartphone app that is connected to the Sensor Ready lighting infrastructure. Organizations can automate the lighting cycle to achieve human and energy advantages, as well as providing the users more choice and flexibility. And that is exactly what makes the HCL system really human-centric.

**The Internet of Things**

With the Internet of Things, smart objects can more than ever interact with one another. With the use of modern day sensors, luminaires can sense changes, collect data and then respond to it. All this data can then be shared with other smart elements and systems. This is what we call connected lighting, which utilizes the large potential of the Internet of Things.

Xitanium SR drivers and EasyAir sensor add functionality – and therefore value – to your connected luminaires. Communication between driver and sensor is via a standard interface based on DALI 2.0 EasyAir sensors use wireless communication, reducing cabling and installation cost and are therefore ideal for renovation projects as well as new installations.

**Connected lighting in indoor applications**

In indoor connected lighting systems, sensors distributed throughout a building gather information about usage of specific spaces. Every luminaire becomes a node that senses, collects and passes on information about energy consumption, daylight harvesting and occupancy. This information is used to manage heating, ventilation, IT and cleaning resources in the most cost effective way. Facility managers can streamline operations, achieve sustainability goals, and optimize workspace utilization. Historic records simplify making decisions about long-term resource management. Connected lighting makes effective use of space in activity based workspaces too.

**Lighting, when and where it's needed**

Sensors ensure lighting is only on when and where it is needed. The EasyAir sensors bring huge benefits in terms of energy management as they enable sunlight harvesting, automatic dimming, and sensing the presence of people. The lighting is only on when actually required so cost savings are considerable. EasyAir sensors are ideal for all office areas including work spaces, conference rooms, corridors, break-out rooms, administrative areas, stairwells and similar applications in schools and hospitals.

**Wireless configuration**

Configuration can be done before installation using SimpleSet and on site via Philips Field Apps. This gives us and your clients more freedom during the whole installation process. Communication is via a Zigbee protocol, and EasyAir is prepared to accommodate thread as it emerges. Advanced Zigbee technology makes it possible to have multiple sensors working as a single group. You can also create different scenes for specific applications, such as a presentation mode in a meeting room.

**EasyAir group sensor**

The EasyAir advanced grouping SNS210 is a breakthrough in sensor applications thanks to its unique capability for grouping sensors with Zigbee. It enables sensors to work together and communicate without wires between luminaires. Having just one sensor for daylight and occupancy sensing makes control per luminaire more practical as well as further reducing clutter in the ceiling. Configuration and commissioning is done with the Philips Field Apps. The sensor portfolio will be further extended to include other applications to offer even more 'personal control' solutions using a smartphone. The possibilities are endless.

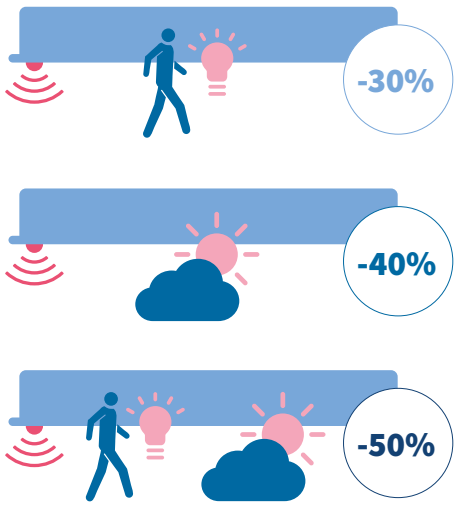

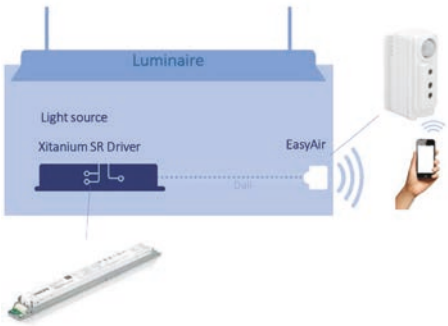


**EasyAir wireless sensor**

• Presence and daylight measurement
• Zigbee wireless communication
• Configuration via user-friendly smartphone app

Sensor Ready driver
• Standardized open SR interface (based on DALI 2.0)
• 4% accurate power metering
• Diagnostics

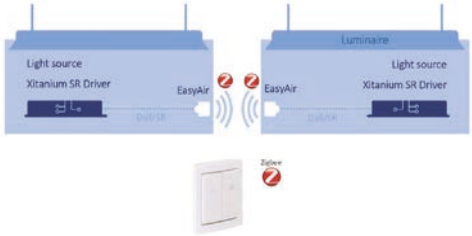


**Groups of Luminaires with EasyAir Sensors communicate together in 1 room or beyond**

Perfect for NEW and renovation projects:

• No wires between luminaires
• Wireless switching and dimming
• No controllers or power packs needed

# Easy Air

The EasyAir SNS210 is a wireless option that combines occupancy sensing, daylight harvesting and task tuning. It enables groups of sensors to work together and communicate with each other without the need for additional physical connection between luminaires.

The EasyAir SNS210 can be easily programmed via a smartphone running the Philips Field Apps. This gives tremendous flexibility when configuring luminaires into wireless groups.

**Benefits**

Simple grouping via NFC and IR using the Philips Field Apps
Occupancy sharing (a zone where motion is detected automatically goes to full light level, while other zones remain at background light level)
Easily create the right environment (e.g. presentation mode: low-level lighting near the screen, brighter towards the back of the conference room)

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including Philips Xitanium driver SR |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **DIFFUSER** | Opalic white |
| **ADJUSTABLE** | No |
| **SIZE** | Different sizes available |

## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wire. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **SUSPENSION SET** | Suspension set 1500mm |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 60.000/L90B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# ORBIT 40 SR



Technical drawing



| ARTICLE NUMBER **Opal** | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.01100.83.XC.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.01100.81.XC.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.01100.84.XC.OP.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

| ARTICLE NUMBER **UGR<19** | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.01100.83.XC.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.01100.81.XC.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.01100.84.XC.MP19.Δ | Ø425mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI

# ORBIT 50 SR



Technical drawing

| ARTICLE NUMBER **Opal** | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.01101.83.XC.OP.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.01101.81.XC.OP.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.01101.84.XC.OP.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

| ARTICLE NUMBER **UGR<19** | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.01101.83.XC.MP19.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 66.01101.81.XC.MP19.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 66.01101.84.XC.MP19.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

# ORBIT 65 SR



Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.01110.83.XC.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3000K | >80 |
| 66.01110.81.XC.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 3500K | >80 |
| 66.01110.84.XC.OP.Δ | Ø650mm | 8500lm | 57W | 149lm/W | 4000K | >80 |

IP20 5 YEARS WARRANTY DALI 2

# ORBIT 90 SR



Technical drawing

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 66.01120.83.XC.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3000K | >80 |
| 66.01120.81.XC.OP.Δ | Ø900mm | 12000lm | 70W | 171lm/W | 3500K | >80 |
| 66.01120.84.XC.OPΔ | Ø900mm | 12000lm | 70W | 171lm/W | 4000K | >80 |

THE STUDENT HOTEL, DRESDEN, GERMANY

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 400 SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |



## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01110.83.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01110.81.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01110.84.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01111.83.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01111.81.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01111.84.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01112.83.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01112.81.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01112.84.E. XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01113.83.E. XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01113.81.E. XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01113.84.E. XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01114.83.E. XC.OP.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01114.81.E. XC.OP.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01114.84.E. XC.OP.Δ | 2056mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01115.83.E. XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01115.81.E. XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01115.84.E. XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01116.83.E. XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01116.81.E. XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01116.84.E. XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01117.83.E. XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01117.81.E. XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01117.84.E. XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01110.83.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01110.81.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01110.84.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01111.83.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01111.81.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01111.84.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01112.83.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01112.81.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01112.84.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01113.83.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01113.81.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01113.84.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01114.83.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01114.81.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01114.84.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01115.83.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01115.81.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01115.84.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01116.83.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01116.81.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01116.84.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01117.83.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01117.81.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01117.84.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 400 P SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |



## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## SINGLE PROFILES UP/DN OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01120.83.E.XC.OP.Δ | 932mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01120.81.E.XC.OP.Δ | 932mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01120.84.E.XC.OP.Δ | 932mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01121.83.E.XC.OP.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01121.81.E.XC.OP.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01121.84.E.XC.OP.Δ | 1213mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01122.83.E.XC.OP.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01122.81.E.XC.OP.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01122.84.E.XC.OP.Δ | 1494mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01123.83.E.XC.OP.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.01123.81.E.XC.OP.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.01123.84.E.XC.OP.Δ | 1775mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.01124.83.E.XC.OP.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.01124.81.E.XC.OP.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.01124.84.E.XC.OP.Δ | 2056mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.01125.83.E.XC.OP.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.01125.81.E.XC.OP.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.01125.84.E.XC.OP.Δ | 2337mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.01126.83.E.XC.OP.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.01126.81.E.XC.OP.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.01126.84.E.XC.OP.Δ | 2618mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.01127.83.E.XC.OP.Δ | 2899mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.01127.81.E.XC.OP.Δ | 2899mm | 20900lm | 124W | 170lm/W | 3500K | >80 |
| 55.01127.84.E.XC.OP.Δ | 2899mm | 20900lm | 124W | 170lm/WV | 4000K | >80 |

## SINGLE PROFILES UP/DN UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01120.83.E.XC.MP19.Δ | 932mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01120.81.E.XC.MP19.Δ | 932mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01120.84.E.XC.MP19.Δ | 932mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01121.83.E.XC.MP19.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01121.81.E.XC.MP19.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01121.84.E.XC.MP19.Δ | 1213mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01122.83.E.XC.MP19.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01122.81.E.XC.MP19.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01122.84.E.XC.MP19.Δ | 1494mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01123.83.E.XC.MP19.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.01123.81.E.XC.MP19.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.01123.84.E.XC.MP19.Δ | 1775mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.01124.83.E.XC.MP19.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.01124.81.E.XC.MP19.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.01124.84.E.XC.MP19.Δ | 2056mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.01125.83.E.XC.MP19.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.01125.81.E.XC.MP19.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.01125.84.E.XC.MP19.Δ | 2337mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.01126.83.E.XC.MP19.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.01126.81.E.XC.MP19.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.01126.84.E.XC.MP19.Δ | 2618mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.01127.83.E.XC.MP19.Δ | 2899mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.01127.81.E.XC.MP19.Δ | 2899mm | 20900lm | 124W | 169lm/W | 3500K | >80 |
| 55.01127.84.E.XC.MP19.Δ | 2899mm | 20900lm | 124W | 169lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 500 SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |



## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01100.83.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01100.81.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01100.84.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01101.83.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01101.81.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01101.84.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01102.83.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01102.81.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01102.84.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01103.83.E.XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01103.81.E.XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01103.84.E.XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01104.83.E.XC.OP.Δ | 1775mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01104.81.E.XC.OP.Δ | 1775mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01104.84.E.XC.OP.Δ | 1775mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01105.83.E.XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01105.81.E.XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01105.84.E.XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01106.83.E.XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01106.81.E.XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01106.84.E.XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01107.83.E.XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01107.81.E.XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01107.84.E.XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01100.83.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01100.81.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01100.84.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01101.83.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01101.81.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01101.84.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01102.83.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01102.81.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01102.84.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01103.83.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01103.81.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01103.84.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01104.83.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01104.81.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01104.84.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01105.83.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01105.81.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01105.84.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01106.83.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01106.81.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01106.84.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01107.83.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01107.81.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01107.84.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 600 SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |



## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01150.83.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01150.81.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01150.84.E.XC.OP.Δ | 932mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01151.83.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01151.81.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01151.84.E.XC.OP.Δ | 1213mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01152.83.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01152.81.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01152.84.E.XC.OP.Δ | 1494mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01153.83.E.XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01153.81.E.XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01153.84.E.XC.OP.Δ | 1775mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01154.83.E.XC.OP.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01154.81.E.XC.OP.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01154.84.E.XC.OP.Δ | 2056mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01155.83.E.XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01155.81.E.XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01155.84.E.XC.OP.Δ | 2337mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01156.83.E.XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01156.81.E.XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01156.84.E.XC.OP.Δ | 2618mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01157.83.E.XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01157.81.E.XCOP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01157.84.E.XC.OP.Δ | 2899mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01150.83.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01150.81.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01150.84.E.XC.MP19.Δ | 932mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01151.83.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01151.81.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01151.84.E.XC.MP19.Δ | 1213mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01152.83.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01152.81.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01152.84.E.XC.MP19.Δ | 1494mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01153.83.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01153.81.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01153.84.E.XC.MP19.Δ | 1775mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01154.83.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01154.81.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01154.84.E.XC.MP19.Δ | 2056mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01155.83.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01155.81.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01155.84.E.XC.MP19.Δ | 2337mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01156.83.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01156.81.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01156.84.E.XC.MP19.Δ | 2618mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01157.83.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01157.81.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01157.84.E.XC.MP19.Δ | 2899mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 600 P SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |



## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## SINGLE PROFILES UP/DN OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01160.83.E.XC.OP.Δ | 932mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01160.81.E.XC.OP.Δ | 932mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01160.84.E.XC.OP.Δ | 932mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01161.83.E.XC.OP.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01161.81.E.XC.OP.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01161.84.E.XC.OP.Δ | 1213mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01162.83.E.XC.OP.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01162.81.E.XC.OP.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01162.84.E.XC.OP.Δ | 1494mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01163.83.E.XC.OP.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.01163.81.E.XC.OP.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.01163.84.E.XC.OP.Δ | 1775mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.01164.83.E.XC.OP.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.01164.81.E.XC.OP.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.01164.84.E.XC.OP.Δ | 2056mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.01165.83.E.XC.OP.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.01165.81.E.XC.OP.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.01165.84.E.XC.OP.Δ | 2337mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.01166.83.E.XC.OP.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.01166.81.E.XC.OP.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.01166.84.E.XC.OP.Δ | 2618mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.01167.83.E.XC.OP.Δ | 2899mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.01167.81.E.XC.OP.Δ | 2899mm | 20900lm | 124W | 170lm/W | 3500K | >80 |
| 55.01167.84.E.XC.OP.Δ | 2899mm | 20900lm | 124W | 170lm/WV | 4000K | >80 |

## SINGLE PROFILES UP/DN UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01160.83.E.XC.MP19.Δ | 932mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01160.81.E.XC.MP19.Δ | 932mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01160.84.E.XC.MP19.Δ | 932mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01161.83.E.XC.MP19.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01161.81.E.XC.MP19.Δ | 1213mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01161.84.E.XC.MP19.Δ | 1213mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01162.83.E.XC.MP19.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01162.81.E.XC.MP19.Δ | 1494mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01162.84.E.XC.MP19.Δ | 1494mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01163.83.E.XC.MP19.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.01163.81.E.XC.MP19.Δ | 1775mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.01163.84.E.XC.MP19.Δ | 1775mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.01164.83.E.XC.MP19.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.01164.81.E.XC.MP19.Δ | 2056mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.01164.84.E.XC.MP19.Δ | 2056mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.01165.83.E.XC.MP19.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.01165.81.E.XC.MP19.Δ | 2337mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.01165.84.E.XC.MP19.Δ | 2337mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.01166.83.E.XC.MP19.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.01166.81.E.XC.MP19.Δ | 2618mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.01166.84.E.XC.MP19.Δ | 2618mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.01167.83.E.XC.MP19.Δ | 2899mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.01167.81.E.XC.MP19.Δ | 2899mm | 20900lm | 124W | 169lm/W | 3500K | >80 |
| 55.01167.84.E.XC.MP19.Δ | 2899mm | 20900lm | 124W | 169lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 500 RECESSED SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |




Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01200.83.E.XC.OP.Δ | 652mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.01200.81.E.XC.OP.Δ | 652mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.01200.43.E.XC.OP.Δ | 652mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.01201.83.E.XC.OP.Δ | 952mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01201.81.E.XC.OP.Δ | 952mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01201.43.E.XC.OP.Δ | 952mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01202.83.E.XC.OP.Δ | 1233mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01202.81.E.XC.OP.Δ | 1233mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01202.84.E.XC.OP.Δ | 1233mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01203.83.E.XC.OP.Δ | 1514mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01203.81.E.XC.OP.Δ | 1514mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01203.84.E.XC.OP.Δ | 1514mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01204.83.E.XC.OP.Δ | 1795mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01204.81.E.XC.OP.Δ | 1795mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01204.84.E.XC.OP.Δ | 1795mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01205.83.E.XC.OP.Δ | 2076mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01205.81.E.XC.OP.Δ | 2076mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01205.84.E.XC.OP.Δ | 2076mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01206.83.E.XC.OP.Δ | 2357mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01206.81.E.XC.OP.Δ | 2357mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01206.84.E.XC.OP.Δ | 2357mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01207.83.E.XC.OP.Δ | 2638mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01207.81.E.XC.OP.Δ | 2638mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01207.84.E.XC.OP.Δ | 2638mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01208.83.E.XC.OP.Δ | 2919mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01208.81.E.XC.OP.Δ | 2919mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01208.84.E.XC.OP.Δ | 2919mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.01200.83.E.XC.MP19.Δ | 652mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.01200.81.E.XC.MP19.Δ | 652mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.01200.84.E.XC.MP19.Δ | 652mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.01201.83.E.XC.MP19.Δ | 952mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.01201.81.E.XC.MP19.Δ | 952mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.01201.84.E.XC.MP19.Δ | 952mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.01202.83.E.XC.MP19.Δ | 1233mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.01202.81.E.XC.MP19.Δ | 1233mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.01202.84.E.XC.MP19.Δ | 1233mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.01203.83.E.XC.MP19.Δ | 1514mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.01203.81.E.XC.MP19.Δ | 1514mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.01203.84.E.XC.MP19.Δ | 1514mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.01204.83.E.XC.MP19.Δ | 1795mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.01204.81.E.XC.MP19.Δ | 1795mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.01204.84.E.XC.MP19.Δ | 1795mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.01205.83.E.XC.MP19.Δ | 2076mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.01205.81.E.XC.MP19.Δ | 2076mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.01205.84.E.XC.MP19.Δ | 2076mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.01206.83.E.XC.MP19.Δ | 2357mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.01206.81.E.XC.MP19.Δ | 2357mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.01206.84.E.XC.MP19.Δ | 2357mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.01207.83.E.XC.MP19.Δ | 2638mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.01207.81.E.XC.MP19.Δ | 2638mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.01207.84.E.XC.MP19.Δ | 2638mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.01208.83.E.XC.MP19.Δ | 2919mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.01208.81.E.XC.MP19.Δ | 2919mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.01208.84.E.XC.MP19.Δ | 2919mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# SHELL SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **DIFFUSER** | Opalic white |
| **ADJUSTABLE** | No |
| **SIZE** | Ø500 X 280mm |

## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor:
Communication between luminaires without wires
Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10%<br>Also available: color combinations |
| **COLOR INSIDE**<br>ON REQUEST | ● **Gold**<br>○ **White**<br>● **Black**<br>● **Aluminium color**<br>● **Custom color on request** |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **SUSPENSION SET** | Suspension set 1500mm included |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |

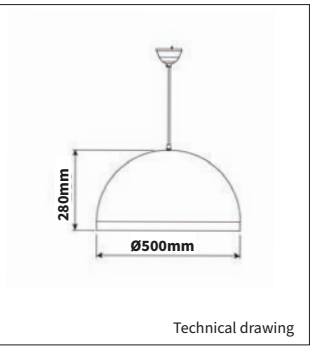

Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 70.01100.83.XC.OP.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 70.01100.81.XC.OP.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 70.01100.84.XC.OP.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19** | | | | | | |
| Δ See colors | | | | | | |
| 70.01100.83.XC.OP.MP19.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3000K | >80 |
| 70.01100.81.XC.OP.MP19.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 3500K | >80 |
| 70.01100.84.XC.OP.MP19.Δ | Ø500mm | 5500lm | 35W | 157lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# QUBEE 60 SR

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **DIFFUSER** | Opalic white |
| **ADJUSTABLE** | No |
| **SIZE** | 595 X 595 X75mm |

## SPECIAL FEATURES

Luminaire is equipped with EasyAir Sensor: Communication between luminaires without wires. Easy smartphone commissioning
Daylight control sensor: Easy Air sensor included
Movement sensor: Easy Air sensor included
Dimmable: DALI 2.0 driver included
Enables gateway data readout
Xitanium SR interface (based on DALI 2.0)

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |



Technical drawing

**DIFFUSER**

White opalic

Microprisma-tic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 80.01030.83.XC.OP.Δ | 595 X 595mm | 5000lm | 30W | 167lm/W | 3000K | >80 |
| 80.01030.81.XC.OP.Δ | 595 X 595mm | 5000lm | 30W | 167lm/W | 3500K | >80 |
| 80.01030.84.XC.OP.Δ | 595 X 595mm | 5000lm | 30W | 167lm/W | 4000K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19** | | | | | | |
| Δ See colors | | | | | | |
| 80.01030.83.XC.OP.MP19.Δ | 595 X 595mm | 5000lm | 30W | 167lm/W | 3000K | >80 |
| 80.01030.81.XC.OP.MP19.Δ | 595 X 595mm | 5000lm | 30W | 167lm/W | 3500K | >80 |
| 80.01030.84.XC.OP.MP19.Δ | 595 X 595mm | 5000lm | 30W | 167lm/W | 4000K | >80 |

# TUNABLE LIGHTING

5CA HEADQUARTERS, UTRECHT, THE NETHERLANDS

**ORBIT TW**
152

**PROFILE 600 TW**
154

**PROFILE 500 RECESSED TW**
156

**QUBEE 60 TW**
157

# Tunable white lighting

With the advancement in LED technology it is now possible to define, for general indoor applications, luminaire architectures comprised of multiple color LED chipsets that can be interlinked with new digital control strategies to tune the correlated color temperature of the white light. Through a combination of light quality, color, and intensity, the system helps create environments that can be tailored to an occupants' needs and preferences at any given time.

**What is tunable white lighting?**

To really understand the benefit of tunable white, it is important to appreciate the effect of light on our biological clock as it influences many aspects of our physical and emotional well-being. This biological clock is regulated by light and darkness, by the daily cycles of night and day and the time we spend asleep and awake.

In our modern society, we spend much of our time indoors – at home, in a school, office, store or hospital. Those who have to stay indoors for significant parts of their time under static lighting conditions run the risk of disrupting their biological rhythms.

**Tunable White**

The dynamic feature of the tunable white system tries to address this risk and allows users to automatically mimic daylight patterns by adjusting color temperature and brightness levels with respect to the time of day. Being able to mimic the natural cycle of daylight in our indoor environments can help support wakefulness and greater wellbeing of the occupants.

The tunable white lighting system is one such unique solution that offers schools, offices, retailers and hospitals greater flexibility with the ability to easily change LED intensities and correlated color temperatures (CCT) from warm white (2700K) all the way to cool white (6500K).

**Setting the mood**

For other applications where mood settings with lighting is considered valuable, the scene set feature within the tunable white system provides a combination of pre-programmed settings that instantly set the scene for room ambiance to support the next scheduled task or spontaneous activity.

For example, for functional activities, lighting can be adjusted to cooler temperatures and higher intensities to support concentration and focus. For activities requiring creativity and cooperation, lighting can be adjusted to warmer temperatures and lower intensities. Similarly, in a school environment, with a simple touch of a button, teachers can activate one of the presets and can easily change the lighting depending on the atmosphere in the class – be it a testing session or usual teaching sessions.

**Improve satisfaction**

There is enough evidence available through various research studies to support that giving people the ability to personalize their lighting setup helps to improve their satisfaction levels. The flexibility within this system allows occupants to not only choose their preferred color temperature but also allows them to tweak the brightness levels to suit their comfort level.

In addition, the controls backbone can be extended to provide simple energy savings options like daylight harvesting and occupancy sensing and can also integrate with luminaires or with other building systems such as heating, ventilation and cooling for driving overall building efficiency performance parameters. With the new tunable white system it is now possible to simulate some of the benefits of natural light in an indoor space for your general wellbeing.

# ORBIT TW

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **DIFFUSER** | Opalic white |
| **ADJUSTABLE** | No |
| **SIZE** | Different sizes available |



## SPECIAL FEATURES

Human Centric Lighting

Our Tunable White luminaires open completely new possibilities to achieve variable settings of colour temperature from 2700K warm white trough neutral to 6500K cold white. This allows to achieve optimized light settings for variable type of projects and applications.

Tunable White solution find its use in offices, schools, health care facilities, hospitality business and all other projects where imitation of changing lighting conditions can be used to improve the quality of people working and living.

Light colour temperature change from warm, relaxing white to activating cold whi-te promotes productivity and the opposite light colour temperature change helps to rest after intensive work. Our Tunable White Luminaires have positive influence on the wellbeing of people which experience it.

**DIFFUSER**

White opalic

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm |
| **DIFFUSER** | White opalic diffuser in standard |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |

## INFORMATION

**Nominal lifetime 60.000/L90B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

IP20 5 YEARS WARRANTY DALI

## ORBIT 40 TW



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.02100.TW.DT8.OP.Δ | Ø425mm | 4000lm | 28W | 143lm/W | 2700-6500K | >80 |

IP20 5 YEARS WARRANTY DALI

## ORBIT 65 TW



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.02110.TW.DT8.OP.Δ | Ø650mm | 4700lm | 30W | 157lm/W | 2700-6500K | >80 |

IP20 5 YEARS WARRANTY DALI

## ORBIT 90 TW



Technical drawing



| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 66.02120.TW.DT8.OP.Δ | Ø900mm | 9600lm | 60W | 160lm/W | 2700-6500K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 600 TW

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## SPECIAL FEATURES

Human Centric Lighting

Our Tunable White luminaires open completely new possibilities to achieve variable settings of colour temperature from 2700K warm white trough neutral to 6500K cold white. This allows to achieve optimized light settings for variable type of projects and applications.

Tunable White solution find its use in offices, schools, health care facilities, hospitality business and all other projects where imitation of changing lighting conditions can be used to improve the quality of people working and living.

Light colour temperature change from warm, relaxing white to activating cold white promotes productivity and the opposite light colour temperature change helps to rest after intensive work. Our Tunable White Luminaires have positive influence on the wellbeing of people which experience it.



Technical drawing

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | Suspension set 1500mm |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.020000.TW.DT8.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 2700-6500K | >80 |
| 55.02010.TW.DT8.OP. Δ | 1143mm | 4400lm | 26W | 169lm/W | 2700-6500K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19** | | | | | | |
| Δ See colors | | | | | | |
| 55.020000.TW.DT8.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 2700-6500K | >80 |
| 55.02010.TW.DT8.MP19. Δ | 1143mm | 4400lm | 26W | 169lm/W | 2700-6500K | >80 |

5CA HEADQUARTERS, UTRECHT, THE NETHERLANDS

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 500 RECESSED TW

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## SPECIAL FEATURES

Human Centric Lighting

Our Tunable White luminaires open completely new possibilities to achieve variable settings of colour temperature from 2700K warm white trough neutral to 6500K cold white. This allows to achieve optimized light settings for variable type of projects and applications.

Tunable White solution find its use in offices, schools, health care facilities, hospitality business and all other projects where imitation of changing lighting conditions can be used to improve the quality of people working and living.

Light colour temperature change from warm, relaxing white to activating cold white promotes productivity and the opposite light colour temperature change helps to rest after intensive work. Our Tunable White Luminaires have positive influence on the wellbeing of people which experience it.




Technical drawing

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.02050.TW.DT8.OP.Δ | 582mm | 2200lm | 16W | 138lm/W | 2700-6500K | >80 |
| 55.02060.TW.DT8.OP. Δ | 1163mm | 4400lm | 28W | 157lm/W | 2700-6500K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19** | | | | | | |
| Δ See colors | | | | | | |
| 55.02050.TW.DT8.MP19.Δ | 582mm | 2200lm | 16W | 138lm/W | 2700-6500K | >80 |
| 55.02060.TW.DT8.MP19. Δ | 1163mm | 4400lm | 28W | 157lm/W | 2700-6500K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# QUBEE 60 TW

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel and aluminium |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **DIFFUSER** | Opalic white |
| **ADJUSTABLE** | No |
| **SIZE** | 595 X 595 X75mm |



## SPECIAL FEATURES

Human Centric Lighting

Our Tunable White luminaires open completely new possibilities to achieve variable settings of colour temperature from 2700K warm white trough neutral to 6500K cold white. This allows to achieve optimized light settings for variable type of projects and applications.

Tunable White solution find its use in offices, schools, health care facilities, hospitality business and all other projects where imitation of changing lighting conditions can be used to improve the quality of people working and living.

Light colour temperature change from warm, relaxing white to activating cold white promotes productivity and the opposite light colour temperature change helps to rest after intensive work. Our Tunable White Luminaires have positive influence on the wellbeing of people which experience it.

Technical drawing

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal**<br>Δ See colors | | | | | | |
| 80.02020.TW.DT8.OP.Δ | 595 X 595mm | 7000lm | 50W | 140lm/W | 2700-6500K | >80 |

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **UGR<19**<br>Δ See colors | | | | | | |
| 80.02020.TW.DT8.MP19.Δ | 595 X 595mm | 7000lm | 50W | 140lm/W | 2700-6500K | >80 |

# PROFILES

LIGHTBOXX, NIJKERK, THE NETHERLANDS

**PROFILE 400**

162



**PROFILE 400 P**

164



**PROFILE 500**

166



**PROFILE 600**

168



**PROFILE 600 P**

172

**PROFILE 500 RECESSED**

174

**PROFILE 450 PREMIUM**

176

**PROFILE Y**

178



**PROFILE HEXA**

179



**PROFILE HEXA 2**

180



**PROFILE HEXA 3.1**

182



**PROFILE HEXA 3.2**

183

**PROFILE SQUARE UD**

184



**PROFILE RECTANGLE UD**

185

**PROFILE QUADRA**

186

**PROFILE TRI**

187

**PROFILE V**

188

**PROFILE X**

189

**PROFILE SNAKE**

190

**PROFILE CLOUD**

191

# Bespoke profiles for every space

Sometimes standard shapes and sizes just aren't enough. You want something unique that makes your spaces stand out from the crowd. That's why our profiles are tailor made to really create something unique that suits every design. This gives us endless possibilities in creating almost every shape you can imagine.

Looking for an outlined version of your company logo, a particular shape to complement your interior or a sports field on your ceiling? Almost everything you can think of, we can design and manufacture. Corners can be made into different angles and junctions can consist of multiple profiles seemlessly coming together. A striking way to bring your brand identity into your store, office, entrance hall or any other space.



It is also possible to spray paint the profiles in any RAL color that you would like. This will ensure that the profiles perfectly match the interior design of the space it will enlighten. Another possibility is for the profiles to match the color(s) of your corporate identity.

DAKA STORE, LEIDSCHENDAM, THE NETHERLANDS

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 400

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00049.83.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00049.81.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00049.84.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00050.83.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00050.81.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00050.84.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00051.83.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00051.81.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00051.84.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00052.83.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00052.81.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00052.84.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00053.83.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00053.81.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00053.84.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00054.83.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00054.81.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00054.84.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00055.83.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00055.81.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00055.84.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00056.83.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00056.81.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00056.84.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00057.83.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00057.81.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00057.84.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00049.83.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00049.81.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00049.84.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00050.83.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00050.81.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00050.84.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00051.83.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00051.81.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00051.84.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00052.83.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00052.81.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00052.84.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00053.83.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00053.81.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00053.84.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00054.83.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00054.81.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00054.84.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00055.83.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00055.81.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00055.84.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00056.83.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00056.81.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00056.84.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00057.83.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00057.81.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00057.84.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 400 P

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

## SINGLE PROFILES UP/DN OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00059.83.E.OP.Δ | 581mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00059.81.E.OP.Δ | 581mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00059.84.E.OP.Δ | 581mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00060.83.E.OP.Δ | 862mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00060.81.E.OP.Δ | 862mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00060.84.E.OP.Δ | 862mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00061.83.E.OP.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00061.81.E.OP.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00061.84.E.OP.Δ | 1143mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00062.83.E.OP.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00062.81.E.OP.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00062.84.E.OP.Δ | 1424mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00063.83.E.OP.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.00063.81.E.OP.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.00063.84.E.OP.Δ | 1705mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.00064.83.E.OP.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.00064.81.E.OP.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.00064.84.E.OP.Δ | 1986mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.00065.83.E.OP.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.00065.81.E.OP.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.00065.84.E.OP.Δ | 2267mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.00066.83.E.OP.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.00066.81.E.OP.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.00066.84.E.OP.Δ | 2548mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.00067.83.E.OP.Δ | 2829mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.00067.81.E.OP.Δ | 2829mm | 20900lm | 124W | 170lm/W | 3500K | >80 |
| 55.00067.84.E.OP.Δ | 2829mm | 20900lm | 124W | 170lm/WV | 4000K | >80 |

## SINGLE PROFILES UP/DN UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00059.83.E.MP19.Δ | 581mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00059.81.E.MP19.Δ | 581mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00059.84.E.MP19.Δ | 581mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00060.83.E.MP19.Δ | 862mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00060.81.E.MP19.Δ | 862mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00060.84.E.MP19.Δ | 862mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00061.83.E.MP19.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00061.81.E.MP19.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00061.84.E.MP19.Δ | 1143mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00062.83.E.MP19.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00062.81.E.MP19.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00062.84.E.MP19.Δ | 1424mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00063.83.E.MP19.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.00063.81.E.MP19.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.00063.84.E.MP19.Δ | 1705mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.00064.83.E.MP19.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.00064.81.E.MP19.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.00064.84.E.MP19.Δ | 1986mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.00065.83.E.MP19.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.00065.81.E.MP19.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.00065.84.E.MP19.Δ | 2267mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.00066.83.E.MP19.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.00066.81.E.MP19.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.00066.84.E.MP19.Δ | 2548mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.00067.83.E.MP19.Δ | 2829mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.00067.81.E.MP19.Δ | 2829mm | 20900lm | 124W | 169lm/W | 3500K | >80 |
| 55.00067.84.E.MP19.Δ | 2829mm | 20900lm | 124W | 169lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 500

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00499.83.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00499.81.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00499.84.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00500.83.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00500.81.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00500.84.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00501.83.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00501.81.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00501.84.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00502.83.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00502.81.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00502.84.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00503.83.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00503.81.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00503.84.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00504.83.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00504.81.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00504.84.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00505.83.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00505.81.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00505.84.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00506.83.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00506.81.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00506.84.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00507.83.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00507.81.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00507.84.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00499.83.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00499.81.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00499.84.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00500.83.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00500.81.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00500.84.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00501.83.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00501.81.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00501.84.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00502.83.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00502.81.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00502.84.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00503.83.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00503.81.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00503.84.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00504.83.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00504.81.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00504.84.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00505.83.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00505.81.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00505.84.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00506.83.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00506.81.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00506.84.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00507.83.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00507.81.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00507.84.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 600

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00249.83.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00249.81.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00249.84.E.OP.Δ | 581mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00213.83.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00213.81.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00213.84.E.OP.Δ | 862mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00214.83.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00214.81.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00214.84.E.OP.Δ | 1143mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00215.83.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00215.81.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00215.84.E.OP.Δ | 1424mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00216.83.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00216.81.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00216.84.E.OP.Δ | 1705mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00217.83.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00217.81.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00217.84.E.OP.Δ | 1986mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00218.83.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00218.81.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00218.84.E.OP.Δ | 2267mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00219.83.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00219.81.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00219.84.E.OP.Δ | 2548mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00220.83.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00220.81.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00220.84.E.OP.Δ | 2829mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00249.83.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00249.81.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00249.84.E.MP19.Δ | 581mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00213.83.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00213.81.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00213.84.E.MP19.Δ | 862mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00214.83.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00214.81.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00214.84.E.MP19.Δ | 1143mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00215.83.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00215.81.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00215.84.E.MP19.Δ | 1424mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00216.83.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00216.81.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00216.84.E.MP19.Δ | 1705mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00217.83.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00217.81.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00217.84.E.MP19.Δ | 1986mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00218.83.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00218.81.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00218.84.E.MP19.Δ | 2267mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00219.83.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00219.81.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00219.84.E.MP19.Δ | 2548mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00220.83.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00220.81.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00220.84.E.MP19.Δ | 2829mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

**SONOS HEADQUARTERS, MUNCHEN, GERMANY**

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 600 P

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

## SINGLE PROFILES UP/DN OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00250.83.E.OP.Δ | 581mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00250.81.E.OP.Δ | 581mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00250.84.E.OP.Δ | 581mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00234.83.E.OP.Δ | 862mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00234.81.E.OP.Δ | 862mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00234.84.E.OP.Δ | 862mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00235.83.E.OP.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00235.81.E.OP.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00235.84.E.OP.Δ | 1143mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00236.83.E.OP.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00236.81.E.OP.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00236.84.E.OP.Δ | 1424mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00237.83.E.OP.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.00237.81.E.OP.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.00237.84.E.OP.Δ | 1705mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.00238.83.E.OP.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.00238.81.E.OP.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.00238.84.E.OP.Δ | 1986mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.00239.83.E.OP.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.00239.81.E.OP.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.00239.84.E.OP.Δ | 2267mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.00240.83.E.OP.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.00240.81.E.OP.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.00240.84.E.OP.Δ | 2548mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.00241.83.E.OP.Δ | 2829mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.00241.81.E.OP.Δ | 2829mm | 20900lm | 124W | 170lm/W | 3500K | >80 |
| 55.00241.84.E.OP.Δ | 2829mm | 20900lm | 124W | 170lm/WV | 4000K | >80 |

## SINGLE PROFILES UP/DN UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00250.83.E.MP19.Δ | 581mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00250.81.E.MP19.Δ | 581mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00250.84.E.MP19.Δ | 581mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00234.83.E.MP19.Δ | 862mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00234.81.E.MP19.Δ | 862mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00234.84.E.MP19.Δ | 862mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00235.83.E.MP19.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00235.81.E.MP19.Δ | 1143mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00235.84.E.MP19.Δ | 1143mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00236.83.E.MP19.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00236.81.E.MP19.Δ | 1424mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00236.84.E.MP19.Δ | 1424mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00237.83.E.MP19.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3000K | >80 |
| 55.00237.81.E.MP19.Δ | 1705mm | 12100lm | 72W | 168lm/W | 3500K | >80 |
| 55.00237.84.E.MP19.Δ | 1705mm | 12100lm | 72W | 168lm/W | 4000K | >80 |
| 55.00238.83.E.MP19.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3000K | >80 |
| 55.00238.81.E.MP19.Δ | 1986mm | 14300lm | 85W | 168lm/W | 3500K | >80 |
| 55.00238.84.E.MP19.Δ | 1986mm | 14300lm | 85W | 168lm/W | 4000K | >80 |
| 55.00239.83.E.MP19.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3000K | >80 |
| 55.00239.81.E.MP19.Δ | 2267mm | 16500lm | 98W | 168lm/W | 3500K | >80 |
| 55.00239.84.E.MP19.Δ | 2267mm | 16500lm | 98W | 168lm/W | 4000K | >80 |
| 55.00240.83.E.MP19.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3000K | >80 |
| 55.00240.81.E.MP19.Δ | 2548mm | 18700lm | 110W | 170lm/W | 3500K | >80 |
| 55.00240.84.E.MP19.Δ | 2548mm | 18700lm | 110W | 170lm/W | 4000K | >80 |
| 55.00241.83.E.MP19.Δ | 2829mm | 20900lm | 124W | 169lm/W | 3000K | >80 |
| 55.00241.81.E.MP19.Δ | 2829mm | 20900lm | 124W | 169lm/W | 3500K | >80 |
| 55.00241.84.E.MP19.Δ | 2829mm | 20900lm | 124W | 169lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 500 RECESSED

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Fortimo |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

Luminaires can be connected into long lighting lines

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

## SINGLE PROFILES OPAL

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00371.83.E.OP.Δ | 582mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00371.81.E.OP.Δ | 582mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00371.84.E.OP.Δ | 582mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00363.83.E.OP.Δ | 882mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00363.81.E.OP.Δ | 882mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00363.43.E.OP.Δ | 882mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00364.83.E.OP.Δ | 1163mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00364.81.E.OP.Δ | 1163mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00364.43.E.OP.Δ | 1163mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00365.83.E.OP.Δ | 1444mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00365.81.E.OP.Δ | 1444mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00365.84.E.OP.Δ | 1444mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00366.83.E.OP.Δ | 1725mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00366.81.E.OP.Δ | 1725mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00366.84.E.OP.Δ | 1725mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00367.83.E.OP.Δ | 2006mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00367.81.E.OP.Δ | 2006mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00367.84.E.OP.Δ | 2006mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00368.83.E.OP.Δ | 2287mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00368.81.E.OP.Δ | 2287mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00368.84.E.OP.Δ | 2287mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00369.83.E.OP.Δ | 2568mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00369.81.E.OP.Δ | 2568mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00369.84.E.OP.Δ | 2568mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00395.83.E.OP.Δ | 2849mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00395.81.E.OP.Δ | 2849mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00395.84.E.OP.Δ | 2849mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

## SINGLE PROFILES UGR<19

Δ See colors

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| 55.00371.83.E.MP19.Δ | 582mm | 2200lm | 14W | 157lm/W | 3000K | >80 |
| 55.00371.81.E.MP19.Δ | 582mm | 2200lm | 14W | 157lm/W | 3500K | >80 |
| 55.00371.84.E.MP19.Δ | 582mm | 2200lm | 14W | 157lm/W | 4000K | >80 |
| 55.00363.83.E.MP19.Δ | 882mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00363.81.E.MP19.Δ | 882mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00363.84.E.MP19.Δ | 882mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00364.83.E.MP19.Δ | 1163mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00364.81.E.MP19.Δ | 1163mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00364.84.E.MP19.Δ | 1163mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00365.83.E.MP19.Δ | 1444mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00365.81.E.MP19.Δ | 1444mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00365.84.E.MP19.Δ | 1444mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00366.83.E.MP19.Δ | 1725mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00366.81.E.MP19.Δ | 1725mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00366.84.E.MP19.Δ | 1725mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00367.83.E.MP19.Δ | 2006mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00367.81.E.MP19.Δ | 2006mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00367.84.E.MP19.Δ | 2006mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00368.83.E.MP19.Δ | 2287mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00368.81.E.MP19.Δ | 2287mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00368.84.E.MP19.Δ | 2287mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00369.83.E.MP19.Δ | 2568mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00369.81.E.MP19.Δ | 2568mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00369.84.E.MP19.Δ | 2568mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00395.83.E.MP19.Δ | 2849mm | 11000lm | 64W | 172lm/W | 3000K | >80 |
| 55.00395.81.E.MP19.Δ | 2849mm | 11000lm | 64W | 172lm/W | 3500K | >80 |
| 55.00395.84.E.MP19.Δ | 2849mm | 11000lm | 64W | 172lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE 450 PREMIUM

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **DIFFUSER** | Parabolic louver |
| **ADJUSTABLE** | No |
| **SIZE** | Different sizes available |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set |
| **DIMMABLE** | Dali dimmable |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **ASYMETRISCH** | | | | | | |
| Δ See colors | | | | | | |
| 55.00366.83.E.LNS AS.Δ | 846mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00366.81.E.LNS AS.Δ | 846mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00366.84.E.LNS AS.Δ | 846mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00366.83.E.LNS AS.Δ | 1126mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00321.81.E.LNS AS.Δ | 1126mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00321.84.E.LNS AS.Δ | 1126mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00322.83.E.LNS AS.Δ | 1406mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00322.81.E.LNS AS.Δ | 1406mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00322.84.E.LNS AS.Δ | 1406mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| **50°** | | | | | | |
| 55.00366.83.E.LNS 50.Δ | 846mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00366.81.E.LNS 50.Δ | 846mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00366.84.E.LNS 50.Δ | 846mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00321.83.E.LNS 50.Δ | 1126mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00321.81.E.LNS 50.Δ | 1126mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00321.84.E.LNS 50.Δ | 1126mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00322.83.E.LNS 50.Δ | 1406mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00322.81.E.LNS 50.Δ | 1406mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00322.84.E.LNS 50.Δ | 1406mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| **80°** | | | | | | |
| 55.00366.83.E.LNS 80.Δ | 846mm | 3300lm | 20W | 165lm/W | 3000K | >80 |
| 55.00366.81.E.LNS 80.Δ | 846mm | 3300lm | 20W | 165lm/W | 3500K | >80 |
| 55.00366.84.E.LNS 80.Δ | 846mm | 3300lm | 20W | 165lm/W | 4000K | >80 |
| 55.00321.83.E.LNS 80.Δ | 1126mm | 4400lm | 26W | 169lm/W | 3000K | >80 |
| 55.00321.81.E.LNS 80.Δ | 1126mm | 4400lm | 26W | 169lm/W | 3500K | >80 |
| 55.00321.84.E.LNS 80.Δ | 1126mm | 4400lm | 26W | 169lm/W | 4000K | >80 |
| 55.00322.83.E.LNS 80.Δ | 1406mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00322.81.E.LNS 80.Δ | 1406mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00322.84.E.LNS 80.Δ | 1406mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| **UP/DN ASYMETRISCH** | | | | | | |
| 55.00325.83.E.LNS AS.Δ | 846mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00325.81.E.LNS AS.Δ | 846mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00325.84.E.LNS AS.Δ | 846mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00326.83.E.LNS AS.Δ | 1126mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00326.81.E.LNS AS.Δ | 1126mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00326.84.E.LNS AS.Δ | 1126mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00327.83.E.LNS AS.Δ | 1406mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00327.81.E.LNS AS.Δ | 1406mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00327.84.E.LNS AS.Δ | 1406mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| **UP/DN 50°** | | | | | | |
| 55.00325.83.E.LNS 50.Δ | 846mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00325.81.E.LNS 50.Δ | 846mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00325.84.E.LNS 50.Δ | 846mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00326.83.E.LNS 50.Δ | 1126mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00326.81.E.LNS 50.Δ | 1126mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00326.84.E.LNS 50.Δ | 1126mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00327.83.E.LNS 50.Δ | 1406mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00327.81.E.LNS 50.Δ | 1406mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00327.84.E.LNS 50.Δ | 1406mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| **UP/DN 80°** | | | | | | |
| 55.00325.83.E.LNS 80.Δ | 846mm | 5500lm | 33W | 167lm/W | 3000K | >80 |
| 55.00325.81.E.LNS 80.Δ | 846mm | 5500lm | 33W | 167lm/W | 3500K | >80 |
| 55.00325.84.E.LNS 80.Δ | 846mm | 5500lm | 33W | 167lm/W | 4000K | >80 |
| 55.00326.83.E.LNS 80.Δ | 1126mm | 7700lm | 46W | 167lm/W | 3000K | >80 |
| 55.00326.81.E.LNS 80.Δ | 1126mm | 7700lm | 46W | 167lm/W | 3500K | >80 |
| 55.00326.84.E.LNS 80.Δ | 1126mm | 7700lm | 46W | 167lm/W | 4000K | >80 |
| 55.00327.83.E.LNS 80.Δ | 1406mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00327.81.E.LNS 80.Δ | 1406mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00327.84.E.LNS 80.Δ | 1406mm | 9900lm | 58W | 171lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE Y

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00440.83.E.OP.Δ | 1200mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00440.81.E.OP.Δ | 1200mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00440.84.E.OP.Δ | 1200mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00441.83.E.OP.Δ | 1800mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00441.81.E.OP.Δ | 1800mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00441.84.E.OP.Δ | 1800mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00442.83.E.OP.Δ | 2400mm | 13200lm | 78W | 169lm/W | 3000K | >80 |
| 55.00442.81.E.OP.Δ | 2400mm | 13200lm | 78W | 169lm/W | 3500K | >80 |
| 55.00442.84.E.OP.Δ | 2400mm | 13200lm | 78W | 169lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00440.83.E.MP19.Δ | 1200mm | 6600lm | 39W | 169lm/W | 3000K | >80 |
| 55.00440.81.E.MP19.Δ | 1200mm | 6600lm | 39W | 169lm/W | 3500K | >80 |
| 55.00440.84.E.MP19.Δ | 1200mm | 6600lm | 39W | 169lm/W | 4000K | >80 |
| 55.00401.83.E.MP19.Δ | 1800mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00441.81.E.MP19.Δ | 1800mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00441.84.E.MP19.Δ | 1800mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00442.83.E.MP19.Δ | 2400mm | 13200lm | 78W | 169lm/W | 3000K | >80 |
| 55.00442.81.E.MP19.Δ | 2400mm | 13200lm | 78W | 169lm/W | 3500K | >80 |
| 55.00442.84.E.MP19.Δ | 2400mm | 13200lm | 78W | 169lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE HEXA

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white with opal cover |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |




Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00495.83.E.OP.Δ | 1200mm | 13200lm | 80W | 165lm/W | 3000K | >80 |
| 55.00495.81.E.OP.Δ | 1200mm | 13200lm | 80W | 165lm/W | 3500K | >80 |
| 55.00495.84.E.OP.Δ | 1200mm | 13200lm | 80W | 165lm/W | 4000K | >80 |
| 55.00471.83.E.OP.Δ | 1800mm | 19800lm | 119W | 166lm/W | 3000K | >80 |
| 55.00471.81.E.OP.Δ | 1800mm | 19800lm | 119W | 166lm/W | 3500K | >80 |
| 55.00471.84.E.OP.Δ | 1800mm | 19800lm | 119W | 166lm/W | 4000K | >80 |
| 55.00472.83.E.OP.Δ | 2400mm | 26400lm | 159W | 166lm/W | 3000K | >80 |
| 55.00472.81.E.OP.Δ | 2400mm | 26400lm | 159W | 166lm/W | 3500K | >80 |
| 55.00472.84.E.OP.Δ | 2400mm | 26400lm | 159W | 166lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00495.83.E.MP19.Δ | 1200mm | 13200lm | 80W | 165lm/W | 3000K | >80 |
| 55.00495.81.E.MP19.Δ | 1200mm | 13200lm | 80W | 165lm/W | 3500K | >80 |
| 55.00495.84.E.MP19.Δ | 1200mm | 13200lm | 80W | 165lm/W | 4000K | >80 |
| 55.00471.83.E.MP19.Δ | 1800mm | 19800lm | 119W | 166lm/W | 3000K | >80 |
| 55.00471.81.E.MP19.Δ | 1800mm | 19800lm | 119W | 166lm/W | 3500K | >80 |
| 55.00471.84.E.MP19.Δ | 1800mm | 19800lm | 119W | 166lm/W | 4000K | >80 |
| 55.00472.83.E.MP19.Δ | 2400mm | 26400lm | 159W | 166lm/W | 3000K | >80 |
| 55.00472.81.E.MP19.Δ | 2400mm | 26400lm | 159W | 166lm/W | 3500K | >80 |
| 55.00472.84.E.MP19.Δ | 2400mm | 26400lm | 159W | 166lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE HEXA 2

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white with opal cover |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00480.83.E.OP.Δ | 2400mm | 24200lm | 145W | 167lm/W | 3000K | >80 |
| 55.00480.81.E.OP.Δ | 2400mm | 24200lm | 145W | 167lm/W | 3500K | >80 |
| 55.00480.84.E.OP.Δ | 2400mm | 24200lm | 145W | 167lm/W | 4000K | >80 |
| 55.00481.83.E.OP.Δ | 3600mm | 36300lm | 218W | 167lm/W | 3000K | >80 |
| 55.00481.81.E.OP.Δ | 3600mm | 36300lm | 218W | 167lm/W | 3500K | >80 |
| 55.00481.84.E.OP.Δ | 3600mm | 36300lm | 218W | 167lm/W | 4000K | >80 |
| 55.00482.83.E.OP.Δ | 4800mm | 48400lm | 290W | 167lm/W | 3000K | >80 |
| 55.00482.81.E.OP.Δ | 4800mm | 48400lm | 290W | 167lm/W | 3500K | >80 |
| 55.00482.84.E.OP.Δ | 4800mm | 48400lm | 290W | 167lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00480.83.E.MP19.Δ | 2400mm | 24200lm | 145W | 167lm/W | 3000K | >80 |
| 55.00480.81.E.MP19.Δ | 2400mm | 24200lm | 145W | 167lm/W | 3500K | >80 |
| 55.00480.84.E.MP19.Δ | 2400mm | 24200lm | 145W | 167lm/W | 4000K | >80 |
| 55.00481.83.E.MP19.Δ | 3600mm | 36300lm | 218W | 167lm/W | 3000K | >80 |
| 55.00481.81.E.MP19.Δ | 3600mm | 36300lm | 218W | 167lm/W | 3500K | >80 |
| 55.00481.84.E.MP19.Δ | 3600mm | 36300lm | 218W | 167lm/W | 4000K | >80 |
| 55.00482.83.E.MP19.Δ | 4800mm | 48400lm | 290W | 167lm/W | 3000K | >80 |
| 55.00482.81.E.MP19.Δ | 4800mm | 48400lm | 290W | 167lm/W | 3500K | >80 |
| 55.00482.84.E.MP19.Δ | 4800mm | 48400lm | 290W | 167lm/W | 4000K | >80 |

TRONIOS HEADQUARTERS, ALMELO, THE NETHERLANDS

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE HEXA 3.1

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white with opal cover |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

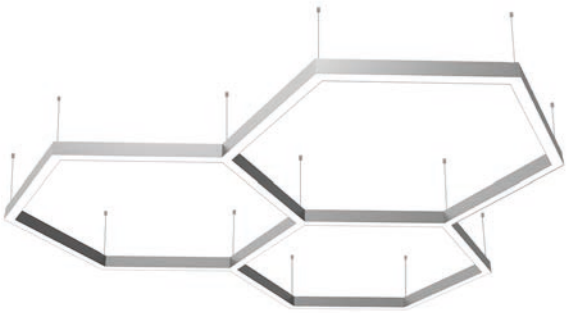

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIMMABLE** | Dali dimmable |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

Microprismatic UGR<19

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00490.83.E.OP.Δ | 2400mm | 33000lm | 198W | 167lm/W | 3000K | >80 |
| 55.00490.81.E.OP.Δ | 2400mm | 33000lm | 198W | 167lm/W | 3500K | >80 |
| 55.00490.84.E.OP.Δ | 2400mm | 33000lm | 198W | 167lm/W | 4000K | >80 |
| 55.00491.83.E.OP.Δ | 3600mm | 49500lm | 297W | 167lm/W | 3000K | >80 |
| 55.00491.81.E.OP.Δ | 3600mm | 49500lm | 297W | 167lm/W | 3500K | >80 |
| 55.00491.84.E.OP.Δ | 3600mm | 49500lm | 297W | 167lm/W | 4000K | >80 |
| 55.00492.83.E.OP.Δ | 4800mm | 66000lm | 396W | 167lm/W | 3000K | >80 |
| 55.00492.81.E.OP.Δ | 4800mm | 66000lm | 396W | 167lm/W | 3500K | >80 |
| 55.00492.84.E.OP.Δ | 4800mm | 66000lm | 396W | 167lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00490.83.E.MP19.Δ | 2400mm | 33000lm | 198W | 167lm/W | 3000K | >80 |
| 55.00490.81.E.MP19.Δ | 2400mm | 33000lm | 198W | 167lm/W | 3500K | >80 |
| 55.00490.84.E.MP19.Δ | 2400mm | 33000lm | 198W | 167lm/W | 4000K | >80 |
| 55.00491.83.E.MP19.Δ | 3600mm | 49500lm | 297W | 167lm/W | 3000K | >80 |
| 55.00491.81.E.MP19.Δ | 3600mm | 49500lm | 297W | 167lm/W | 3500K | >80 |
| 55.00491.84.E.MP19.Δ | 3600mm | 49500lm | 297W | 167lm/W | 4000K | >80 |
| 55.00492.83.E.MP19.Δ | 4800mm | 66000lm | 396W | 167lm/W | 3000K | >80 |
| 55.00492.81.E.MP19.Δ | 4800mm | 66000lm | 396W | 167lm/W | 3500K | >80 |
| 55.00492.84.E.MP19.Δ | 4800mm | 66000lm | 396W | 167lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE HEXA 3.2

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white with opal cover |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |




Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00495.83.E.OP.Δ | 3000mm | 35200lm | 211W | 167lm/W | 3000K | >80 |
| 55.00495.81.E.OP.Δ | 3000mm | 35200lm | 211W | 167lm/W | 3500K | >80 |
| 55.00495.84.E.OP.Δ | 3000mm | 35200lm | 211W | 167lm/W | 4000K | >80 |
| 55.00496.83.E.OP.Δ | 4500mm | 52800lm | 317W | 167lm/W | 3000K | >80 |
| 55.00496.81.E.OP.Δ | 4500mm | 52800lm | 317W | 167lm/W | 3500K | >80 |
| 55.00496.84.E.OP.Δ | 4500mm | 52800lm | 317W | 167lm/W | 4000K | >80 |
| 55.00497.83.E.OP.Δ | 6000mm | 70400lm | 423W | 166lm/W | 3000K | >80 |
| 55.00497.81.E.OP.Δ | 6000mm | 70400lm | 423W | 166lm/W | 3500K | >80 |
| 55.00497.84.E.OP.Δ | 6000mm | 70400lm | 423W | 166lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00495.83.E.MP19.Δ | 3000mm | 35200lm | 211W | 167lm/W | 3000K | >80 |
| 55.00495.81.E.MP19.Δ | 3000mm | 35200lm | 211W | 167lm/W | 3500K | >80 |
| 55.00495.84.E.MP19.Δ | 3000mm | 35200lm | 211W | 167lm/W | 4000K | >80 |
| 55.00496.83.E.MP19.Δ | 4500mm | 52800lm | 317W | 167lm/W | 3000K | >80 |
| 55.00496.81.E.MP19.Δ | 4500mm | 52800lm | 317W | 167lm/W | 3500K | >80 |
| 55.00496.84.E.MP19.Δ | 4500mm | 52800lm | 317W | 167lm/W | 4000K | >80 |
| 55.00497.83.E.MP19.Δ | 6000mm | 70400lm | 423W | 166lm/W | 3000K | >80 |
| 55.00497.81.E.MP19.Δ | 6000mm | 70400lm | 423W | 166lm/W | 3500K | >80 |
| 55.00497.84.E.MP19.Δ | 6000mm | 70400lm | 423W | 166lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE SQUARE UD

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

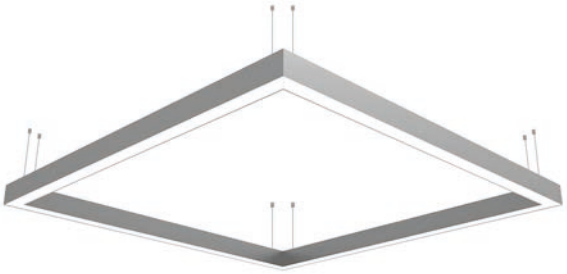

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Profile Square UD




Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 9274.150.30.Δ | 1500 X 1500mm | 35200lm | 215W | 164lm/W | 3000K | >80 |
| 9274.150.35.Δ | 1500 X 1500mm | 35200lm | 215W | 164lm/W | 3500K | >80 |
| 9274.150.40.Δ | 1500 X 1500mm | 35200lm | 215W | 164lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE RECTANGLE UD

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

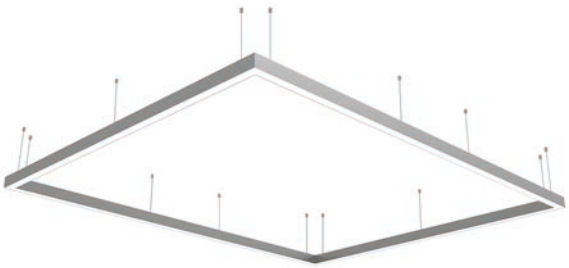

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Profile Rectangle UD




Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 9273.244.30.Δ | 2440 X 3040mm | 59400lm | 361W | 165lm/W | 3000K | >80 |
| 9273.244.35.Δ | 2440 X 3040mm | 59400lm | 361W | 165lm/W | 3500K | >80 |
| 9273.244.40.Δ | 2440 X 3040mm | 59400lm | 361W | 165lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE QUADRA

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Profile Quadra 1

Profile Quadra 2




Profile Quadra 2

**DIFFUSER**

White opalic

Microprismatic UGR<19

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **PROFILE QUADRA 1** | | | | | | |
| Δ See colors | | | | | | |
| 9275.394.30.Δ | 3940 X 3163mm | 101200lm | 625W | 162lm/W | 3000K | >80 |
| 9275.394.35.Δ | 3940 X 3163mm | 101200lm | 625W | 162lm/W | 3500K | >80 |
| 9275.394.40.Δ | 3940 X 3163mm | 101200lm | 625W | 162lm/W | 4000K | >80 |
| **PROFILE QUADRA 2** | | | | | | |
| 9276.440.30.Δ | 4400 X 4600mm | 127600lm | 783W | 163lm/W | 3000K | >80 |
| 9276.440.35.Δ | 4400 X 4600mm | 127600lm | 783W | 163lm/W | 3500K | >80 |
| 9276.440.40.Δ | 4400 X 4600mm | 127600lm | 783W | 163lm/W | 4000K | >80 |

IP20 | CE | 5 YEARS WARRANTY | UGR <19 | DALI 2

# PROFILE TRI

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |




Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00450.83.E.OP.Δ | 960mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00450.81.E.OP.Δ | 960mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00450.84.E.OP.Δ | 960mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00451.83.E.OP.Δ | 1240mm | 13200lm | 78W | 169lm/W | 3000K | >80 |
| 55.00451.81.E.OP.Δ | 1240mm | 13200lm | 78W | 169lm/W | 3500K | >80 |
| 55.00451.84.E.OP.Δ | 1240mm | 13200lm | 78W | 169lm/W | 4000K | >80 |
| 55.00452.83.E.OP.Δ | 1550mm | 16500lm | 99W | 167lm/W | 3000K | >80 |
| 55.00452.81.E.OP.Δ | 1550mm | 16500lm | 99W | 167lm/W | 3500K | >80 |
| 55.00452.84.E.OP.Δ | 1550mm | 16500lm | 99W | 167lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00450.83.E.MP19.Δ | 960mm | 9900lm | 58W | 171lm/W | 3000K | >80 |
| 55.00450.81.E.MP19.Δ | 960mm | 9900lm | 58W | 171lm/W | 3500K | >80 |
| 55.00450.84.E.MP19.Δ | 960mm | 9900lm | 58W | 171lm/W | 4000K | >80 |
| 55.00451.83.E.MP19.Δ | 1240mm | 13200lm | 78W | 169lm/W | 3000K | >80 |
| 55.00451.81.E.MP19.Δ | 1240mm | 13200lm | 78W | 169lm/W | 3500K | >80 |
| 55.00451.84.E.MP19.Δ | 1240mm | 13200lm | 78W | 169lm/W | 4000K | >80 |
| 55.00452.83.E.MP19.Δ | 1550mm | 16500lm | 99W | 167lm/W | 3000K | >80 |
| 55.00452.81.E.MP19.Δ | 1550mm | 16500lm | 99W | 167lm/W | 3500K | >80 |
| 55.00452.84.E.MP19.Δ | 1550mm | 16500lm | 99W | 167lm/W | 4000K | >80 |

# PROFILE V

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | 80mm X 3400mm X 700mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00460.83.E.OP.Δ | 3400mm | 25300lm | 152W | 166lm/W | 3000K | >80 |
| 55.00460.81.E.OP.Δ | 3400mm | 25300lm | 152W | 166lm/W | 3500K | >80 |
| 55.00460.84.E.OP.Δ | 3400mm | 25300lm | 152W | 166lm/W | 4000K | >80 |
| **UGR<19** | | | | | | |
| 55.00460.83.E.MP19.Δ | 3400mm | 25300lm | 152W | 166lm/W | 3000K | >80 |
| 55.00460.81.E.MP19.Δ | 3400mm | 25300lm | 152W | 166lm/W | 3500K | >80 |
| 55.00460.84.E.MP19.Δ | 3400mm | 25300lm | 152W | 166lm/W | 4000K | >80 |

# PROFILE X

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **DIFFUSER** | White opalic diffuser or<br>Microprismatic UGR<19 option |
| **EMERGENCY** | 3 hours |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

**DIFFUSER**

White opalic

Microprismatic UGR<19

## INFORMATION

**Nominal lifetime 70.000/L80B10**

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **Opal** | | | | | | |
| Δ See colors | | | | | | |
| 55.00465.83.E.OP.Δ | 1149mm | 8800lm | 52W | 169lm/W | 3000K | >80 |
| 55.00465.81.E.OP.Δ | 1149mm | 8800lm | 52W | 169lm/W | 3500K | >80 |
| 55.00465.84.E.OP.Δ | 1149mm | 8800lm | 52W | 169lm/W | 4000K | >80 |
| 55.00466.83.E.OP.Δ | 1722mm | 13200lm | 78W | 169lm/W | 3000K | >80 |
| 55.00466.81.E.OP.Δ | 1722mm | 13200lm | 78W | 169lm/W | 3500K | >80 |
| 55.00466.84.E.OP.Δ | 1722mm | 13200lm | 78W | 169lm/W | 4000K | >80 |
| 55.00467.83.E.OP.Δ | 2298mm | 17600lm | 104W | 169lm/W | 3000K | >80 |
| 55.00467.81.E.OP.Δ | 2298mm | 17600lm | 104W | 169lm/W | 3500K | >80 |
| 55.00467.84.E.OP.Δ | 2298mm | 17600lm | 104W | 169lm/W | 4000K | >80 |
| 55.00468.83.E.OP.Δ | 2870mm | 22000lm | 130W | 169lm/W | 3000K | >80 |
| 55.00468.81.E.OP.Δ | 2870mm | 22000lm | 130W | 169lm/W | 3500K | >80 |
| 55.00468.83.E.OP.Δ | 2870mm | 22000lm | 130W | 169lm/W | 4000K | >80 |

# PROFILE SNAKE

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

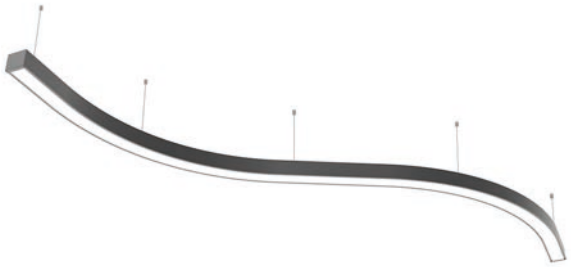

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



PROFILE SNAKE A

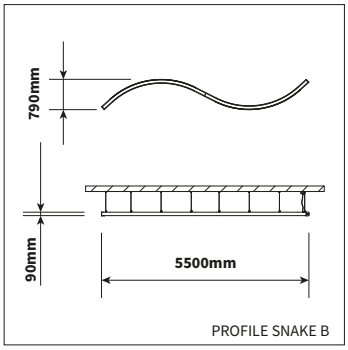

PROFILE SNAKE B

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic







| ARTICLE NUMBER | LENGTH | GROSS LUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| **PROFILE SNAKE A** | | | | | | |
| Δ See colors | | | | | | |
| 9277.350.30.Δ | 3500mm | 13000lm | 82W | 159lm/W | 3000K | >80 |
| 9277.350.35.Δ | 3500mm | 13000lm | 82W | 159lm/W | 3500K | >80 |
| 9277.350.40.Δ | 3500mm | 13000lm | 82W | 159lm/W | 4000K | >80 |
| **PROFILE SNAKE B** | | | | | | |
| 9278.550.30.Δ | 5500mm | 22000lm | 133W | 165lm/W | 3000K | >80 |
| 9278.550.35.Δ | 5500mm | 22000lm | 133W | 165lm/W | 3500K | >80 |
| 9278.550.40.Δ | 5500mm | 22000lm | 133W | 165lm/W | 4000K | >80 |

# PROFILE CLOUD

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium profile |
| **LIGHT SOURCE** | Philips Ledline |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER LEDLINE** | Including driver |
| **COLORS (Δ)** | **3 =** RAL 9003 white<br>**5 =** RAL 9005 black<br>**6 =** RAL 9006 alu |
| **REFLECTOR** | Aluminium white |
| **ADJUSTABLE** | No |
| **SIZE** | See technical drawing |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIMMABLE** | Dali dimmable |
| **SUSPENSION SET** | 1500mm suspension set included |
| **IP CLASS** | IP20 in standard, IP44 on request |
| **COLOUR RENDERING INDEX** | >80 in standard, other on request |
| **MOVEMENT SENSOR** | On request |
| **DAYLIGHT CONTROL SENSOR** | On request |
| **TUNABLE WHITE** | On request |
| **CYAN ENHANCED STATIC** | On request |
| **WIRELESS DIMMABLE** | Masterconnect, Easy Air/Zigbee |



Technical drawing

## INFORMATION

**Bespoke size & product features available**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**DIFFUSER**

White opalic

| ARTICLE NUMBER | LENGTH | GROSSLUMEN OUTPUT | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI |
|---|---|---|---|---|---|---|
| Δ See colors | | | | | | |
| 9276.366.30.Δ | 3663 X 2900mm | 40000lm | 247W | 162lm/W | 3000K | >80 |
| 9276.366.35.Δ | 3663 X 2900mm | 40000lm | 247W | 162lm/W | 3500K | >80 |
| 9276.366.40.Δ | 3663 X 2900mm | 40000lm | 247W | 162lm/W | 4000K | >80 |

# LINEAR SYSTEM

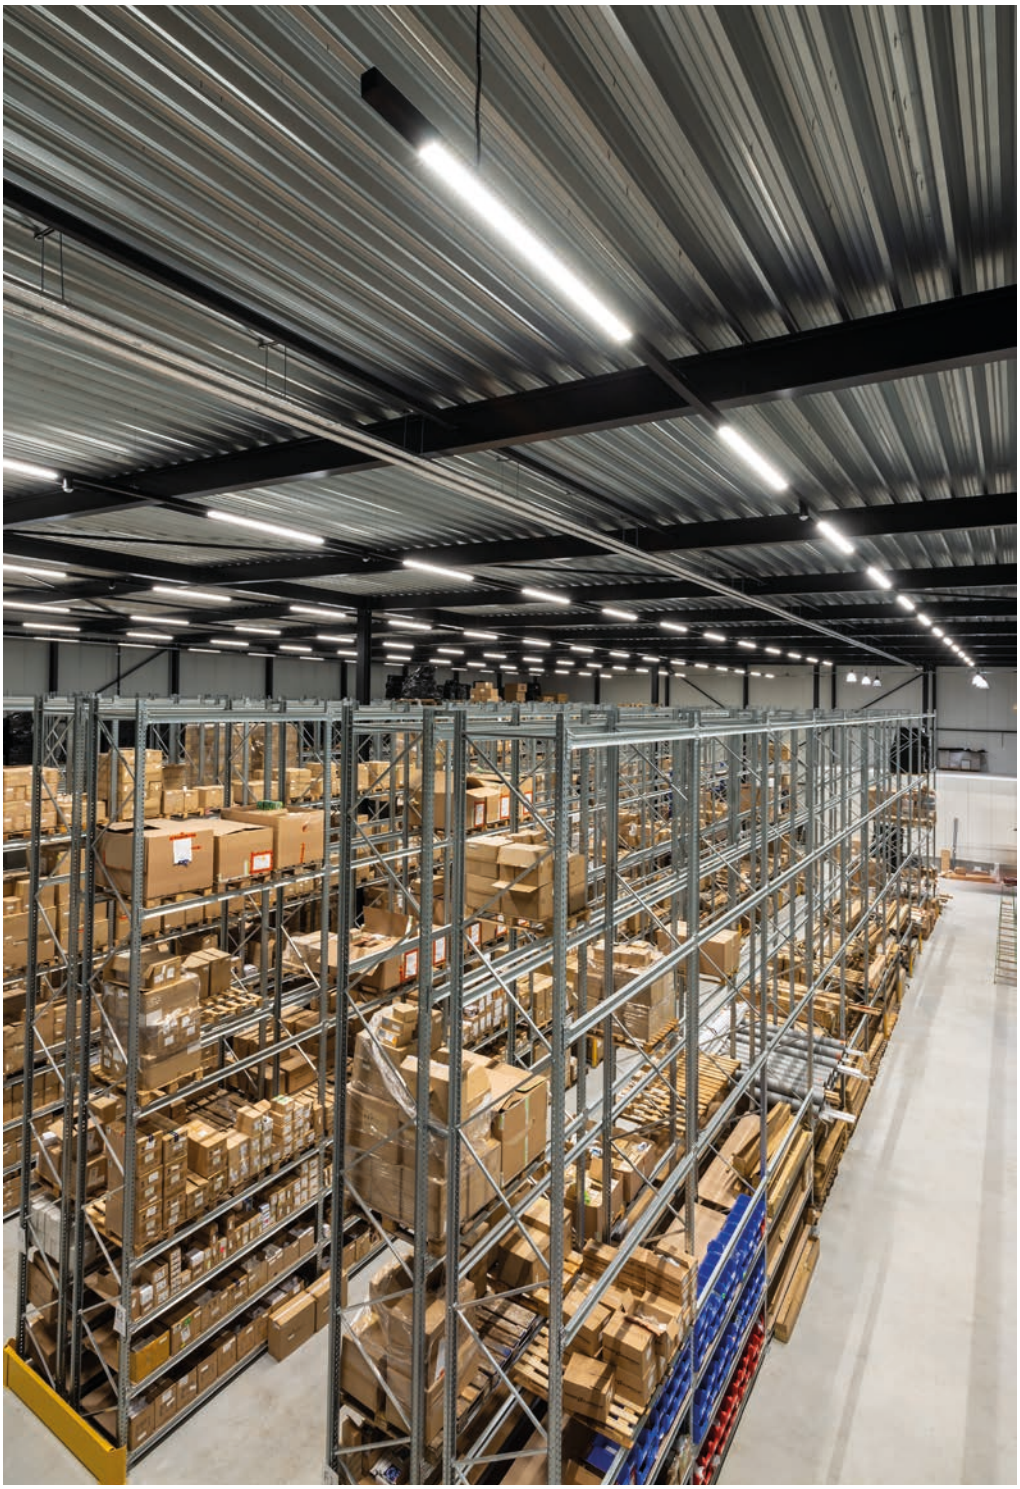

KEYLIGHT, NIJKERK, THE NETHERLANDS

**TRUNK**

194

**MODULE**

195

| | |
|---|---|
| **PRODUCT MATERIAL** | Steel |
| **LIGHT SOURCE** | Edison SMD2835 LED |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **3 =** RAL 9003 white |
| **BEAM ANGLE** | 25° 30° 60° 90° 120° |
| **SIZE** | See technical drawing |

LINEAR LINE

## OPTIONS

| | |
|---|---|
| **EMERGENCY BALLAST** | Automatic battery status detect<br>3 hour emergency time<br>10W LI-battery inside |
| **DIMMABLE** | DALI dimmable |
| **SENSOR** | DALI Network sensor module<br>Art. no.: 9210.800.40.3 |
| | DALI standalone sensor module<br>Art. no.: 9210.801.40.3 |

## INFORMATION

**Linear trunk with 120° is with Opal diffuser**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

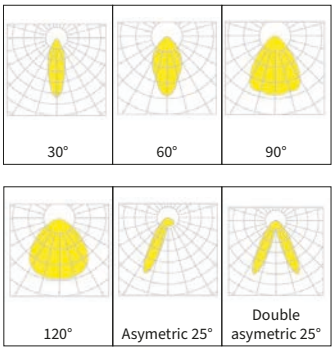


(On request)

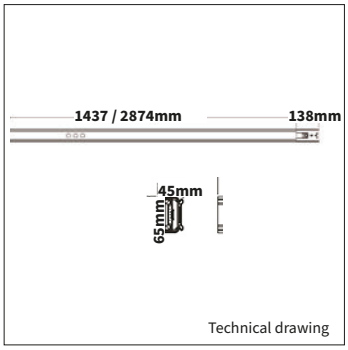


## PRODUCT INFORMATION

New generation luminaire for Linear line trunkimg system improved with higher lumen efficicency. 8 different powers from 25-75W selectable thanks to the dip switch design.

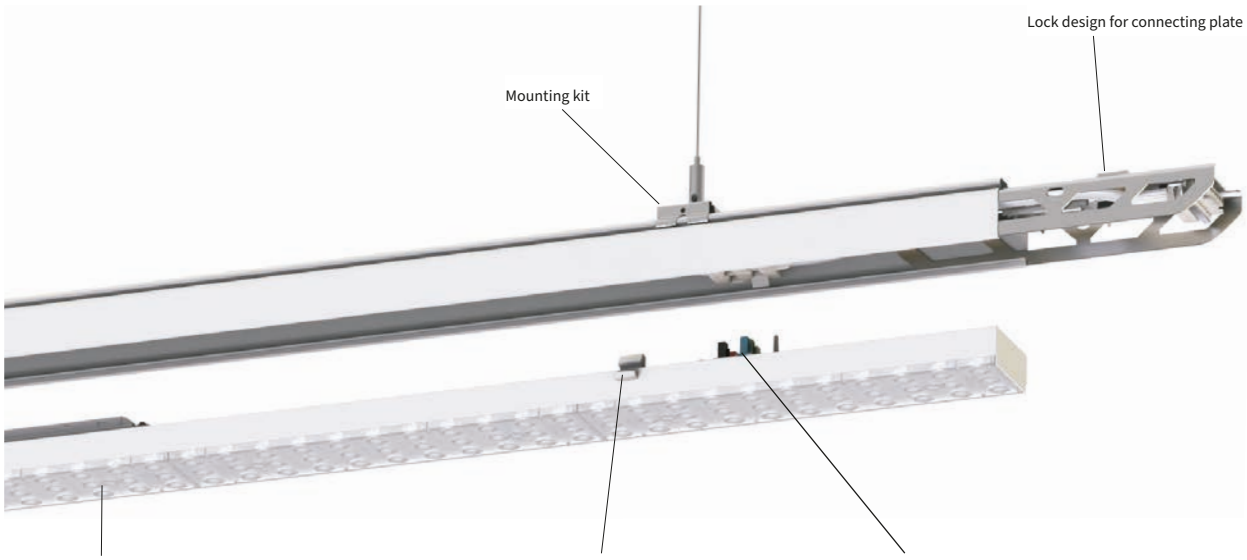

| ARTICLE NUMBER | DESCRIPTION | WIRES | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|---|
| **LINEAR TRUNK** | | | | | | |
| 9210.800.01.3 | Linear Trunk | 8 | white | 1437mm | 65mm | 45mm |
| 9210.800.02.3 | Linear Trunk | 8 | white | 2874mm | 65mm | 45mm |

| ARTICLE NUMBER | DESCRIPTION | LUMEN | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERA-TURE | CRI | LENGTH | BEAM ANGLE | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|---|
| **LED MODULE** | | | | | | | | | |
| 9210.840.25.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 25° Asymetric | 50.000 Hrs |
| 9210.840.30.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 30° | 50.000 Hrs |
| 9210.840.60.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 60° | 50.000 Hrs |
| 9210.840.90.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 90° | 50.000 Hrs |
| 9210.840.12.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 120° | 50.000 Hrs |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 9210.860.25.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 25° Asymetric | 50.000 Hrs |
| 9210.860.30.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 30° | 50.000 Hrs |
| 9210.860.60.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 60° | 50.000 Hrs |
| 9210.860.90.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 90° | 50.000 Hrs |
| 9210.860.12.3 | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 120° | 50.000 Hrs |

| ARTICLE NUMBER | DESCRIPTION | LUMEN | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERA-TURE | CRI | LENGTH | BEAM ANGLE | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|---|
| **LED MODULE EMERGENCY** | | | | | | | | | |
| 9210.840.25.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 25° Asymetric | 50.000 Hrs |
| 9210.840.30.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 30° | 50.000 Hrs |
| 9210.840.60.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 60° | 50.000 Hrs |
| 9210.840.90.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 90° | 50.000 Hrs |
| 9210.840.12.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 4000K | >80 | 1437mm | 120° | 50.000 Hrs |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 9210.860.25.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 25° Asymetric | 50.000 Hrs |
| 9210.860.30.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 30° | 50.000 Hrs |
| 9210.860.60.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 60° | 50.000 Hrs |
| 9210.860.90.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 90° | 50.000 Hrs |
| 9210.860.12.3EM | Linear Trunk LED module | 9600lm | 60W | 160lm/W | 6000K | >80 | 1437mm | 120° | 50.000 Hrs |



| ARTICLE NUMBER | DESCRIPTION | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|
| 9210.800.99.3 | Blind plate cover PC | white | 1437mm | 45mm | 1,5mm |



| ARTICLE NUMBER | DESCRIPTION | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|
| 9210.801.00.3 | Power Feed | white | 255mm | 65mm | 62mm |

| ARTICLE NUMBER | DESCRIPTION | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|
| 9212.003.00.3 | End-cap | white | 5mm | 65mm | 62mm |

| ARTICLE NUMBER | DESCRIPTION | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|
| 9212.004.00.0 | Surface ceiling mounting clamp Every 2m Trunk require 1pc | steel | | | |

| ARTICLE NUMBER | DESCRIPTION | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|
| 9212.005.00.0 | Wire Suspension Every 2m Trunk require 1pc | steel | | | 2000mm |

| ARTICLE NUMBER | DESCRIPTION | COLOR | LENGTH | WIDTH | HEIGHT |
|---|---|---|---|---|---|
| 9212.006.00.0 | Chain suspension Every 2m Trunk require 1pc | steel | | | 2000mm |

# LED STRIPES & PROFILES

EVBOX, AMSTERDAM, THE NETHERLANDS

BLACK EDITION
LED LINE 06
198

BLACK EDITION
LED LINE 06 BUILD IN
198

BLACK EDITION
LED LINE 10
198

BLACK EDITION
LED LINE 10 BUILD IN
198

BLACK EDITION
ROUND 08
199

BLACK EDITION
CORNER 08
199

BLACK EDITION
CORNER 10
199

LED LINE 06
202

LED LINE 06 BUILD IN
202

LED LINE 10
202

LED LINE 10 BUILD IN
202

LED LINE 16 LENS 15-90°
202

LED LINE 17 LOW
203

LED LINE 17 HIGH
203

LED LINE 17 BUILD IN LOW
203

LED LINE 17 BUILD IN HIGH
203

LED LINE 20 ROUND COVER
203

ROUND 08
204

CORNER 08
204

CORNER 10
204

CORNER 18
204

CORNER 30
204

TRIMLESS 13 OPAL
205

TRIMLESS 35 OPAL
205

WALL WASHER
205

LED LINE 12 INDIRECT
205

TUBE 30
205

TUBE 60
205

TUBE 100
206

COB LED STRIPE
208

LED STRIPE
209

DRIVERS LED STRIPE
211




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 06 (For LED up to 4mm)** | | | | |
| 0601.066.07.5 | Profile | Aluminium black | 4mm | 2000 X 6,6 X 7mm |
| 0601.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0601.150.04.0 | Cover opal | LT 78% | | 2000mm |
| 0601.180.04.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0601.998.04.5 | End cap | black | | |
| 0601.999.04.5 | End cap + cable hole | black | | |
| 0601.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 06 BUILD IN (For LED up to 4mm)** | | | | |
| 0604.108.07.5 | Profile | Aluminium black | 4mm | 2000 X 10,8 X 7mm |
| 0604.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0604.150.04.0 | Cover opal | LT 78% | | 2000mm |
| 0604.180.04.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0604.998.04.5 | End cap | black | | |
| 0604.999.04.5 | End cap + cable hole | black | | |
| 0604.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 10 (For LED up to 8mm)** | | | | |
| 0606.010.09.5 | Profile | Aluminium black | 8mm | 2000 X 10,6 X 9mm |
| 0606.101.08.0 | Cover clear | LT 92% | | 2000mm |
| 0606.150.08.0 | Cover opal | LT 78% | | 2000mm |
| 0606.180.08.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0606.998.08.5 | End cap | black | | |
| 0606.999.08.5 | End cap + cable hole | black | | |
| 0606.997.08.0 | Mounting bracket | metal | | |
| 0606.996.08.0 | Magnetic clip | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 10 BUILD IN (For LED up to 8mm)** | | | | |
| 0609.015.09.5 | Profile | Aluminium black | 8mm | 2000 X 15 X 9mm |
| 0609.101.08.0 | Cover clear | LT 92% | | 2000mm |
| 0609.150.08.0 | Cover opal | LT 78% | | 2000mm |
| 0609.180.08.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0609.998.08.5 | End cap | black | | |
| 0609.999.08.5 | End cap + cable hole | black | | |
| 0609.997.08.0 | Mounting bracket | metal | | |
| 0609.996.08.0 | Magnetic clip | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **ROUND 08 (For LED up to 4mm)** | | | | |
| 0602.008.08.5 | Profile | Aluminium black | 4mm | 2000 X Ø8mm |
| 0602.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0602.150.04.0 | Cover opal | LT 78% | | 2000mm |
| 0602.180.04.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0602.998.04.5 | End cap | black | | |
| 0602.999.04.5 | End cap + cable hole | black | | |
| 0602.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **CORNER 08 (For LED up to 4mm)** | | | | |
| 0603.008.08.5 | Profile | Aluminium black | 4mm | 2000 X 8 X 8mm |
| 0603.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0603.150.04.0 | Cover opal | LT 78% | | 2000mm |
| 0603.180.04.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0603.998.04.5 | End cap | black | | |
| 0603.999.04.5 | End cap + cable hole | black | | |
| 0603.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **CORNER 10 (For LED up to 6mm)** | | | | |
| 0605.010.10.5 | Profile | Aluminium black | 4mm | 2000 X 10 X 10mm |
| 0605.101.06.0 | Cover clear | LT 92% | | 2000mm |
| 0605.150.06.0 | Cover opal | LT 78% | | 2000mm |
| 0605.180.06.5 | Cover black | LT 25% | | 2000mm |
| **Accessories** | | | | |
| 0605.998.06.5 | End cap | black | | |
| 0605.999.06.5 | End cap + cable hole | black | | |
| 0605.997.06.0 | Mounting bracket | metal | | |

**EVBOX HEADQUARTERS, AMSTERDAM, THE NETHERLANDS**




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 06 (For LED up to 4mm)** | | | | |
| 0601.066.07.6 | Profile | Aluminium anodized | 4mm | 2000 X 6,6 X 7mm |
| 0601.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0601.150.04.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0601.998.04.6 | End cap | grey | | |
| 0601.999.04.6 | End cap + cable hole | grey | | |
| 0601.997.04.0 | Mounting bracket | metal | | |






| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 06 BUILD IN (For LED up to 4mm)** | | | | |
| 0604.108.07.6 | Profile | Aluminium anodized | 4mm | 2000 X 10,8 X 7mm |
| 0604.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0604.150.04.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0604.998.04.6 | End cap | grey | | |
| 0604.999.04.6 | End cap + cable hole | grey | | |
| 0604.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 10 (For LED up to 8mm)** | | | | |
| 0606.010.09.6 | Profile | Aluminium anodized | 8mm | 2000 X 10,6 X 9mm |
| 0606.101.08.0 | Cover clear | LT 92% | | 2000mm |
| 0606.150.08.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0606.998.08.6 | End cap | grey | | |
| 0606.999.08.6 | End cap + cable hole | grey | | |
| 0606.997.08.0 | Mounting bracket | metal | | |
| 0606.996.08.0 | Magnetic clip | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 10 BUILD IN (For LED up to 8mm)** | | | | |
| 0609.015.09.6 | Profile | Aluminium anodized | 8mm | 2000 X 15 X 9mm |
| 0609.101.08.0 | Cover clear | LT 92% | | 2000mm |
| 0609.150.08.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0609.998.08.6 | End cap | grey | | |
| 0609.999.08.6 | End cap + cable hole | grey | | |
| 0609.997.08.0 | Mounting bracket | metal | | |
| 0609.996.08.0 | Magnetic clip | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 16 LENS 15-90° (For LED up to 10mm)** | | | | |
| 0616.000.16.6 | Profile | Aluminium anodized | 10mm | 2000 X 16 X 17,5mm |
| | including insert plate, 15-90° lens, cover clear LT 98% | | | |
| **Accessories** | | | | |
| 0716.999.99.6 | End cap | grey | | |
| 0716.901.99.6 | End cap + cable hole | grey | | |
| 0778.999.99.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 17 LOW (For LED up to 12mm)** | | | | |
| 0607.999.91.6 | Profile | Aluminium anodized | 12mm | 2000 X 17,5 X 7mm |
| 0600.101.07.0 | Cover clear | LT 98% | | 2000mm |
| 0600.150.07.0 | Cover opal | LT 78% | | 2000mm |
| 0600.100.07.0 | Cover full opal | LT 50% | | 2000mm |
| **Accessories** | | | | |
| 0770.999.99.6 | End cap | grey | | |
| 0707.999.99.6 | End cap + cable hole | grey | | |
| 0777.999.99.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 17 HIGH (For LED up to 12mm)** | | | | |
| 0615.000.00.6 | Profile | aluminium anodized | 12mm | 2000 X 17,1 X 14,6mm |
| 0600.101.15.0 | Cover clear | LT 98% | | 2000mm |
| 0600.150.15.0 | Cover opal | LT 78% | | 2000mm |
| 0600.100.15.0 | Cover full opal | LT 50% | | 2000mm |
| **Accessories** | | | | |
| 0756.999.99.6 | End cap | grey | | |
| 0765.999.99.6 | End cap + cable hole | grey | | |
| 0750.999.99.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 17 LOW BUILD IN (For LED up to 12mm)** | | | | |
| 0677.999.91.6 | Profile | Aluminium anodized | 12mm | 2000 X 24,8 X 7mm |
| 0600.101.07.0 | Cover clear | LT 98% | | 2000mm |
| 0600.150.07.0 | Cover opal | LT 78% | | 2000mm |
| 0600.100.07.0 | Cover full opal | LT 50% | | 2000mm |
| **Accessories** | | | | |
| 0701.999.99.6 | End cap | grey | | |
| 0702.999.99.6 | End cap + cable hole | grey | | |
| 0747.999.99.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 17 HIGH BUILD IN (For LED up to 12mm)** | | | | |
| 0651.000.00.6 | Profile | aluminium anodized | 12mm | 2000 X 24,8 X 14,8mm |
| 0600.101.15.0 | Cover clear | LT 98% | | 2000mm |
| 0600.150.15.0 | Cover opal | LT 78% | | 2000mm |
| 0600.100.15.0 | Cover full opal | LT 50% | | 2000mm |
| **Accessories** | | | | |
| 0751.999.99.6 | End cap | grey | | |
| 0715.999.99.6 | End cap + cable hole | grey | | |
| 0748.999.99.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 20 ROUND COVER (For LED up to 16mm)** | | | | |
| 0619.000.00.6 | Profile | aluminium anodized | 12mm | 2000 X 19,5 X 19,6mm |
| 0619.100.00.0 | Cover full opal | LT 50% | | 2000mm |
| **Accessories** | | | | |
| 0719.902.99.6 | End cap | grey | | |
| 0719.901.99.6 | End cap + cable hole | grey | | |
| 0719.000.00.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **ROUND 08 (For LED up to 4mm)** | | | | |
| 0602.008.08.6 | Profile | Aluminium anodized | 4mm | 2000 X Ø8mm |
| 0602.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0602.150.04.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0602.998.04.6 | End cap | grey | | |
| 0602.999.04.6 | End cap + cable hole | grey | | |
| 0602.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **CORNER 08 (For LED up to 4mm)** | | | | |
| 0603.008.08.6 | Profile | Aluminium anodized | 4mm | 2000 X 8 X 8mm |
| 0603.101.04.0 | Cover clear | LT 92% | | 2000mm |
| 0603.150.04.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0603.998.04.6 | End cap | grey | | |
| 0603.999.04.6 | End cap + cable hole | grey | | |
| 0603.997.04.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **CORNER 10 (For LED up to 6mm)** | | | | |
| 0605.010.10.6 | Profile | Aluminium anodized | 4mm | 2000 X 10 X 10mm |
| 0605.101.06.0 | Cover clear | LT 92% | | 2000mm |
| 0605.150.06.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0605.998.06.6 | End cap | grey | | |
| 0605.999.06.6 | End cap + cable hole | grey | | |
| 0605.997.06.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **CORNER 18 (For LED up to 12mm)** | | | | |
| 0618.000.00.6 | Profile | Aluminium anodized | 12mm | 2000 X 18,5 X 18,5mm |
| 0600.101.07.0 | Cover clear | LT 98% | | 2000mm |
| 0600.150.07.0 | Cover opal | LT 78% | | 2000mm |
| 0600.100.07.0 | Cover full opal | LT 50% | | 2000mm |
| **Accessories** | | | | |
| 0754.999.99.6 | End cap | grey | | |
| 0745.999.99.6 | End cap + cable hole | grey | | |
| 0746.999.99.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **CORNER 30 (For LED up to 26mm)** | | | | |
| 0631.000.00.6 | Profile | aluminium anodized | 26,9mm | 3000 X 30 X 30mm |
| | including cover full opal LT 50% | | | |
| **Accessories** | | | | |
| 0731.902.99.6 | End cap | grey | | |
| 0731.901.99.6 | End cap + cable hole | grey | | |
| 0731.000.00.6 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **TRIMLESS 13 OPAL (For LED up to 10mm)** | | | | |
| 0610.545.14.6 | Profile | Aluminium anodized | 10mm | 2000 X 54,5 X 14mm |
| 0610.150.10.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0610.998.10.6 | End cap | grey | | |
| 0610.999.10.6 | End cap + cable hole | grey | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **TRIMLESS 35 OPAL (For LED up to 32mm)** | | | | |
| 0611.088.20.6 | Profile | aluminium anodized | 32,2mm | 2000 X 88 X 20,3mm |
| 0611.150.32.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0611.998.32.6 | End cap | grey | | |
| 0611.999.32.6 | End cap + cable hole | grey | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **WALL WASHER (For LED up to 17mm)** | | | | |
| 0613.175.70.6 | Profile | aluminium anodized | 12mm | 2000 X 17,5 X 70mm |
| 0613.150.14.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0613.998.14.6 | End cap | grey | | |
| 0613.999.14.6 | End cap + cable hole | grey | | |
| 0613.997.14.0 | Mounting bracket | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **LED LINE 12 INDIRECT (for LED up to 12mm)** | | | | |
| 0614.122.51.6 | Profile | aluminium anodized | 2 X 12mm | 2000 X 122,4 X 50,8mm |
| 0614.150.12.0 | Cover opal | LT 78% | | 2000mm |
| **Accessories** | | | | |
| 0614.998.12.6 | End cap | grey | | |
| 0614.999.12.6 | End cap + cable hole | grey | | |
| 0614.996.12.0 | Spring clip | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **TUBE 30 (For LED up to 20mm)** | | | | |
| 0630.000.00.6 | Profile | aluminium anodized | 21mm | 3000 X Ø30mm |
| | including cover full opal LT 50% | | | |
| **Accessories** | | | | |
| 0730.902.99.6 | End cap | grey | | |
| 0730.901.99.6 | End cap + cable hole | grey | | |
| 0730.200.00.6 | Suspension kit 2 X 2000mm | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **TUBE 60 (For LED up to 39mm)** | | | | |
| 0658.000.00.6 | Profile | aluminium anodized | 39,1mm | 3000 X Ø60mm |
| | including cover full opal LT 50% | | | |
| **Accessories** | | | | |
| 0758.902.00.6 | End cap | grey | | |
| 0758.901.00.6 | End cap + cable hole | grey | | |
| 0758.200.00.6 | Suspension kit 2 X 2000mm | metal | | |




| ARTICLE NUMBER | DESCRIPTION | COLOR | LED STRIPE | SIZE (LxWxH) |
|---|---|---|---|---|
| **TUBE 100 (For LED up to 20mm)** | | | | |
| 0612.100.10.6 | Profile | aluminium anodized | 5 X 12mm | 2000 X Ø100mm |
| | inclucing cover opal LT 78% | | | |
| **Accessories** | | | | |
| 0612.998.12.3 | End cap | white | | |
| 0612.999.12.3 | End cap + cable hole | white | | |
| 0612.900.12.0 | Pendant kit | metal | | |

**BAKERY TOEBAST, HOEVELAKEN, THE NETHERLANDS**

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE COB BLACK 8MM** | | | | | | | | |
| 0319.240.36.0 | 24V | 36W | **2400K** | 561lm | 5m | 8mm | IP20 | >90 |
| 0319.280.36.0 | 24V | 36W | **2800K** | 597lm | 5m | 8mm | IP20 | >90 |
| 0319.300.36.0 | 24V | 36W | **3000K** | 612lm | 5m | 8mm | IP20 | >90 |
| 0319.350.36.0 | 24V | 36W | **3500K** | 633lm | 5m | 8mm | IP20 | >90 |
| 0319.240.72.0 | 24V | 72W | **2400K** | 1123lm | 5m | 8mm | IP20 | >90 |
| 0319.280.72.0 | 24V | 72W | **2800K** | 1195lm | 5m | 8mm | IP20 | >90 |
| 0319.300.72.0 | 24V | 72W | **3000K** | 1224lm | 5m | 8mm | IP20 | >90 |
| 0319.350.72.0 | 24V | 72W | **3500K** | 1267lm | 5m | 8mm | IP20 | >90 |
| **CONNECTOR COB 8MM** | | | | | | | | |
| 0300.999.08.1 | Connector 2 Pin 8mm IP65 | | | | | 8mm | IP65 | |
| 0300.998.08.1 | Connector 2 Pin 8mm IP65 incl. Cable | | | | | 8mm | IP65 | |
| 0300.997.08.1 | Connector 2 Pin 8mm IP65 Double + Cable | | | | | 8mm | IP65 | |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE COB BLACK 10MM** | | | | | | | | |
| 0320.240.36.0 | 24V | 36W | **2400K** | 546lm | 5m | 10mm | IP20 | >90 |
| 0320.280.36.0 | 24V | 36W | **2800K** | 581lm | 5m | 10mm | IP20 | >90 |
| 0320.300.36.0 | 24V | 36W | **3000K** | 595lm | 5m | 10mm | IP20 | >90 |
| 0320.350.36.0 | 24V | 36W | **3500K** | 616lm | 5m | 10mm | IP20 | >90 |
| 0320.240.36.1 | 24V | 36W | **2400K** | 546lm | 5m | 13mm | IP67 | >90 |
| 0320.280.36.1 | 24V | 36W | **2800K** | 581lm | 5m | 13mm | IP67 | >90 |
| 0320.300.36.1 | 24V | 36W | **3000K** | 595lm | 5m | 13mm | IP67 | >90 |
| 0320.350.36.1 | 24V | 36W | **3500K** | 616lm | 5m | 13mm | IP67 | >90 |
| 0320.240.75.0 | 24V | 75W | **2400K** | 1170lm | 5m | 10mm | IP20 | >90 |
| 0320.280.75.0 | 24V | 75W | **2800K** | 1245lm | 5m | 10mm | IP20 | >90 |
| 0320.300.75.0 | 24V | 75W | **3000K** | 1275lm | 5m | 10mm | IP20 | >90 |
| 0320.350.75.0 | 24V | 75W | **3500K** | 1320lm | 5m | 10mm | IP20 | >90 |
| **CONNECTOR COB 10MM** | | | | | | | | |
| 0300.999.10.1 | Connector 2 Pin 10mm IP65 | | | | | 10mm | IP65 | |
| 0300.998.10.1 | Connector 2 Pin 10mm IP65 incl. Cable | | | | | 10mm | IP65 | |
| 0300.997.10.1 | Connector 2 Pin 10mm IP65 Double +Cable | | | | | 10mm | IP65 | |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE COB BLACK 10MM SAUNA** | | | | | | | | |
| 0320.240.50.1 | 24V | 50W | **2400K** | 350lm | 5m | 14mm | IP67 | >90 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE COB WHITE 12MM RGB** | | | | | | | | |
| 0305.999.99.0 | 24V | 75W | **RGB** | 450lm | 5m | 12mm | IP20 | >90 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 4MM** | | | | | | | | |
| 0304.240.45.0 | 24V | 45W | **2400K** | 750lm | 5m | 4mm | IP20 | >90 |
| 0304.280.45.0 | 24V | 45W | **2800K** | 780lm | 5m | 4mm | IP20 | >90 |
| 0304.300.45.0 | 24V | 45W | **3000K** | 780lm | 5m | 4mm | IP20 | >90 |
| 0304.350.45.0 | 24V | 45W | **3500K** | 780lm | 5m | 4mm | IP20 | >90 |
| **CONNECTOR 4MM** | | | | | | | | |
| 0300.999.04.0 | Connector 2 Pin 4mm IP20 | | | | | 4mm | IP20 | |
| 0300.998.04.0 | Connector 2 Pin 4mm IP20 incl. Cable | | | | | 4mm | IP20 | |
| 0300.997.04.0 | Connector 2 Pin 4mm IP20 Double + Cable | | | | | 4mm | IP20 | |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 8MM** | | | | | | | | |
| 0216.240.36.0 | 24V | 36W | **2400K** | 600lm | 5m | 8mm | IP20 | >90 |
| 0216.280.36.0 | 24V | 36W | **2800K** | 620lm | 5m | 8mm | IP20 | >90 |
| 0216.300.36.0 | 24V | 36W | **3000K** | 620lm | 5m | 8mm | IP20 | >90 |
| 0216.450.36.0 | 24V | 36W | **4500K** | 650lm | 5m | 8mm | IP20 | >90 |
| 0216.240.36.1 | 24V | 36W | **2400K** | 600lm | 5m | 13mm | IP67 | >90 |
| 0216.280.36.1 | 24V | 36W | **2800K** | 620lm | 5m | 13mm | IP67 | >90 |
| 0216.300.36.1 | 24V | 36W | **3000K** | 620lm | 5m | 13mm | IP67 | >90 |
| 0216.450.36.1 | 24V | 36W | **4500K** | 650lm | 5m | 13mm | IP67 | >90 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 8MM FULL SPECTRUM** | | | | | | | | |
| 0309.280.48.0 | 24V | 48W | **2800K** | 768lm | 5m | 8mm | IP20 | >97 |
| 0309.300.48.0 | 24V | 48W | **3000K** | 797lm | 5m | 8mm | IP20 | >97 |
| 0309.350.48.0 | 24V | 48W | **3500K** | 816lm | 5m | 8mm | IP20 | >97 |
| 0309.400.48.0 | 24V | 48W | **4000K** | 864lm | 5m | 8mm | IP20 | >97 |
| **CONNECTOR 8MM** | | | | | | | | |
| 0300.999.08.1 | Connector 2 Pin 8mm IP65 | | | | | 8mm | IP65 | |
| 0300.998.08.1 | Connector 2 Pin 8mm IP65 incl. Cable | | | | | 8mm | IP65 | |
| 0300.997.08.1 | Connector 2 Pin 8mm IP65 Double + Cable | | | | | 8mm | IP65 | |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 10MM** | | | | | | | | |
| 0216.240.96.0 | 24V | 96W | **2400K** | 1550lm | 5m | 10mm | IP20 | >90 |
| 0216.280.96.0 | 24V | 96W | **2800K** | 1600lm | 5m | 10mm | IP20 | >90 |
| 0216.300.96.0 | 24V | 96W | **3000K** | 1650lm | 5m | 10mm | IP20 | >90 |
| 0216.450.96.0 | 24V | 96W | **4500K** | 1700lm | 5m | 10mm | IP20 | >90 |
| 0216.240.96.2 | 24V | 96W | **2400K** | 1800lm | 5m | 12mm | IP65 | >90 |
| 0216.300.96.2 | 24V | 96W | **3000K** | 1950lm | 5m | 12mm | IP65 | >90 |
| 0216.450.96.2 | 24V | 96W | **4500K** | 2070lm | 5m | 12mm | IP65 | >90 |
| 0216.280.15.0 | 24V | 115W | **2800K** | 2185lm | 5m | 10mm | IP20 | >90 |
| 0216.300.15.0 | 24V | 115W | **3000K** | 2185lm | 5m | 10mm | IP20 | >90 |
| 0216.450.15.0 | 24V | 115W | **4500K** | 2229lm | 5m | 10mm | IP20 | >90 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 10MM FULL SPECTRUM** | | | | | | | | |
| 0310.280.96.0 | 24V | 96W | **2800K** | 1536lm | 5m | 10mm | IP20 | >97 |
| 0310.300.96.0 | 24V | 96W | **3000K** | 1593lm | 5m | 10mm | IP20 | >97 |
| 0310.350.96.0 | 24V | 96W | **3500K** | 1632lm | 5m | 10mm | IP20 | >97 |
| 0310.400.96.0 | 24V | 96W | **4000K** | 1728lm | 5m | 10mm | IP20 | >97 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 10MM ULTRA LONG (Installation length max. 50m)** | | | | | | | | |
| 0306.280.32.0 | **48V** | 132W | **2800K** | 390lm | **20m** | 10mm | IP20 | >90 |
| 0306.300.32.0 | **48V** | 132W | **3000K** | 410lm | **20m** | 10mm | IP20 | >90 |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| **CONNECTOR 10MM** | | | | | | | | |
| 0300.999.10.0 | Connector 2 Pin 10mm IP20 | | | | | 10mm | IP20 | |
| 0300.998.10.0 | Connector 2 Pin 10mm IP20 incl. Cable | | | | | 10mm | IP20 | |
| 0300.997.10.0 | Connector 2 Pin 10mm IP20 Double +Cable | | | | | 10mm | IP20 | |
| 0300.996.10.0 | L-Connector 2 Pin 10mm IP20 | | | | | 10mm | IP20 | |

| ARTICLE NUMBER | | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|---|
| **STRIPE 10MM FRESH FOOD** | | | | | | | | | |
| 0235.250.72.0 | Bread | 24V | 72W | **2500K** | 1368lm | 5m | 10mm | IP20 | |
| 0235.290.72.0 | Meat | 24V | 72W | **2900K** | 1411lm | 5m | 10mm | IP20 | |
| 0235.300.72.0 | Fruit | 24V | 72W | **3000K** | 1411lm | 5m | 10mm | IP20 | |
| 0235.500.72.0 | Vegetable | 24V | 72W | **5000K** | 1512lm | 5m | 10mm | IP20 | |
| 0235.750.72.0 | Fresh Fish | 24V | 72W | **7500K** | 1440lm | 5m | 10mm | IP20 | |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 10MM TUNABLE WHITE** | | | | | | | | |
| 0216.965.48.0 | 24V | 48W | **2700/6500K** | 700lm | 5m | 10mm | IP20 | >90 |
| 0216.665.96.0 | 24V | 96W | **2700/6500K** | 1600lm | 5m | 10mm | IP20 | >90 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 12MM RGB** | | | | | | | | |
| 0224.999.99.0 | 24V | 36W | **RGB** | 600lm | 5m | 12mm | IP20 | >80 |
| 0306.999.99.0 | 24V | 72W | **RGB** | 240lm | 5m | 12mm | IP20 | >80 |
| 0307.999.99.0 | 24V | 72W | **RGB** | 240lm | 5m | 12mm | IP68 | >80 |

| ARTICLE NUMBER | VOLT | WATT | COLOR TEMPERATURE | LUMEN PER 1m | LENGTH | WIDTH | IP | CRI |
|---|---|---|---|---|---|---|---|---|
| **STRIPE 12MM RGB-W** | | | | | | | | |
| 0308.280.72.0 | 24V | 72W | **RGBW +2800K** | 1200lm | 5m | 12mm | IP20 | >80 |
| 0308.450.72.0 | 24V | 72W | **RGBW +4500K** | 1200lm | 5m | 12mm | IP20 | >80 |
| 0308.280.72.1 | 24V | 72W | **RGBW + 2800K** | 1200lm | 5m | 17mm | IP67 | >80 |
| 0308.450.72.1 | 24V | 72W | **RGBW + 4500K** | 1200lm | 5m | 17mm | IP67 | >80 |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP |
|---|---|---|---|
| **Drivers on/off** | | | |
| 0124.020.10.0 | 24VDC | 20W | IP67 |
| 0124.035.10.0 | 24VDC | 35W | IP67 |
| 0124.060.10.0 | 24VDC | 60W | IP67 |
| 0124.100.10.0 | 24VDC | 100W | IP67 |
| 0124.150.10.0 | 24VDC | 150W | IP67 |
| 0124.240.10.0 | 24VDC | 240W | IP67 |
| 0124.600.10.0 | 24VDC | 600W | IP65 |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP |
|---|---|---|---|
| **Drivers phase cut dimmable** | | | |
| 0124.040.20.0 | 24VDC | 40W | IP20 |
| 0124.075.20.0 | 24VDC | 75W | IP65 |
| 0124.150.20.0 | 24VDC | 150W | IP20 |
| 0124.320.20.0 | 24VDC | 320W | IP65 |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP | |
|---|---|---|---|---|
| **Drivers 0-10V** | | | | |
| 0124.040.30.0 | 24VDC | 40W | IP67 | 0-10V |
| 0124.060.30.0 | 24VDC | 60W | IP67 | 0-10V |
| 0124.090.30.0 | 24VDC | 90W | IP67 | 0-10V |
| 0124.120.30.0 | 24VDC | 120W | IP67 | 0-10V |
| 0124.240.30.0 | 24VDC | 240W | IP67 | 0-10V |
| 0124.600.30.0 | 24VDC | 600W | IP67 | 0-10V |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP |
|---|---|---|---|
| **Drivers DALI dimmable** | | | |
| 0124.060.40.0 | 24VDC | 60W | IP20 |
| 0124.090.40.0 | 24VDC | 90W | IP67 |
| 0124.120.40.0 | 24VDC | 120W | IP20 |
| 0124.240.40.0 | 24VDC | 240W | IP20 |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP |
|---|---|---|---|
| **Drivers DALI dimmable Tunable white** | | | |
| 0124.050.40.2 | 24VDC | 50W | IP20 |
| 0124.080.40.2 | 24VDC | 80W | IP20 |
| 0124.160.40.2 | 24VDC | 160W | IP20 |

| ARTICLE NUMBER | VOLTAGE | WATTAGE | IP |
|---|---|---|---|
| **Drivers Casambi** | | | |
| 0124.060.50.0 | 24VDC | 60W | IP67 |
| 0124.120.50.0 | 24VDC | 120W | IP67 |

**Full warranty only applies when fixture is purchased in combination with recommended driver.**

# EMERGENCY

LIGHTBOXX, NIJKERK, THE NETHERLANDS

**ESCAPE EXIT**

214



**ESCAPE BASE RECESSED**

215

**ESCAPE BASE SURFACE**

216

**ESCAPE BASE 3F**

217



**ESCAPE BASE SQ**

218

**ESCAPE BASE SQ 3F**

219

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **PANEL** | Acryllic board with imprinted dot-matrix lens diffusion |
| **LIGHTSOURCE** | SMD 3528 - 14PCS |
| **COLORS** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **VIEWING DISTANCE** | 30m |
| **SIZE** | 330 X 251 X 15mm |

## INFORMATION

| | | |
|---|---|---|
| **MOUNTING OPTIONS** | Wall surface | Standard |
| | Ceiling | Standard |
| | Side | Standard |
| | 3 phase track | Option |
| **PICTOGRAMS (INCL.)** | 1x blank | |
| | 2x arrow up | |
| | 2x arrow left/right | |
| **EMERGENCY BATTERY** | Including sealed nickel-cadmium rechargeable battery pack (1 hour) | |
| **AUTO MAINTENANCE** | Once the unit is powered up it will automatically initiate a self test and diagnostics. Detailed specifications on request. | |
| **E N STANDARD** | On request | |
| **REPLACEMENT BATTERY** | Art. no.: 0551.000.00.3 | |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

Escape exit 3F adapter




Technical drawing

Standard mounting possibillities art. no.: 0551.999.50.Δ




Ceiling mounted




Wall down mounted




Wall side mounted

| ARTICLE NUMBER | LAMP TYPE | LIGHT OUTPUT | EMERGENCY LUMEN OUTPUT | MODULE POWER | BATTERY CHARGE DURATION | BATTERY LIFETIME WHEN DISCONNECTED | BATTERY | VIEWING DISTANCE |
|---|---|---|---|---|---|---|---|---|
| **SURFACE** | | | | | | | | |
| 0551.999.50.3 (white) | SMD LED 3528 | 50lm | 13lm | 4W | 24 Hrs | 1 Hr | Ni_Cd 3.6v 800mA | 30m |
| 0551.999.50.5 (black) | SMD LED 3528 | 50lm | 13lm | 4W | 24 Hrs | 1 Hr | Ni_Cd 3.6v 800mA | 30m |
| **TRACK 3F ADAPTER** | | | | | | | | |
| 0551.300.50.3 (white) | SMD LED 3528 | 50lm | 13lm | 4W | 24 Hrs | 1 Hr | Ni_Cd 3.6v 800mA | 30m |
| 0551.300.50.5 (black) | SMD LED 3528 | 50lm | 13lm | 4W | 24 Hrs | 1 Hr | Ni_Cd 3.6v 800mA | 30m |

# ESCAPE BASE RECESSED

| | |
|---|---|
| **PRODUCT MATERIAL** | Thermoplastic housing |
| **LIGHTSOURCE** | SMD 3030 LED |
| **COLORS** | ○ **3 =** RAL 9003 white |
| | ● **5 =** RAL 9005 black |
| **VIEWING DISTANCE** | Wide lens for open area |
| **SIZE** | 140 X 49mm |

## INFORMATION

| | |
|---|---|
| **MAINTAINED** | Non-maintained |
| **AUTO TEST** | Yes |
| **EMERGENCY BATTERY** | Including sealed Ni-NH battery<br>life time 4 years<br>24 hours charge time<br>rechargeable battery pack 1 hour |
| **EN STANDARD** | Europe standard EN1838 |
| **EN STANDARD** | |

| Mounting height | Open area |
|---|---|
| 2,5m | 10m*10m |
| 3,0m | 11m*11m |
| 3,5m | 12m*12m |

| | |
|---|---|
| **REPLACEMENT BATTERY** | Art. no.: 0552.000.00.3 |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Hole size




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | COLOR TEMPERATURE | EMERGENCY LUMEN OUTPUT | MODULE POWER | BATTERY CHARGE DURATION | BATTERY LIFETIME WHEN DISCONNECTED | BATTERY |
|---|---|---|---|---|---|---|---|
| 0552.999.37.3 (white) | 6 X LED SMD 3030 | 6500K | 375lm | 4W | 24 Hrs | 1 hour | Ni_Mh 7.2V 1300mA |
| 0552.999.37.5 (black) | 6 X LED SMD 3030 | 6500K | 375lm | 4W | 24 Hrs | 1 hour | Ni_Mh 7.2V 1300mA |

IP20 CE 3 YEARS WARRANTY

# ESCAPE BASE SURFACE

| | |
|---|---|
| **PRODUCT MATERIAL** | Thermoplastic housing |
| **LIGHTSOURCE** | SMD 3030 LED |
| **COLORS** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **VIEWING DISTANCE** | Wide lens for open area |
| **SIZE** | 143 X 55mm |

## INFORMATION

| | |
|---|---|
| **MAINTAINED** | Non-maintained |
| **AUTO TEST** | Yes |
| **EMERGENCY BATTERY** | Including sealed Ni-NH battery<br>life time 4 years<br>24 hours charge time<br>rechargeable battery pack 1 hour |
| **EN STANDARD** | Europe standard EN1838 |
| **EN STANDARD** | |

| Mounting height | Open area |
|---|---|
| 2,5m | 10m*10m |
| 3,0m | 11m*11m |
| 3,5m | 12m*12m |

| | |
|---|---|
| **REPLACEMENT BATTERY** | Art. no.: 0552.000.00.3 |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | COLOR TEMPERATURE | EMERGENCY LUMEN OUTPUT | MODULE POWER | BATTERY CHARGE DURATION | BATTERY LIFETIME WHEN DISCONNECTED | BATTERY |
|---|---|---|---|---|---|---|---|
| 0552.909.37.3 (white) | 6 X LED SMD 3030 | 6500K | 375lm | 4W | 24 Hrs | 1 hour | Ni_Mh 7.2V 1300mA |
| 0552.909.37.5 (black) | 6 X LED SMD 3030 | 6500K | 375lm | 4W | 24 Hrs | 1 hour | Ni_Mh 7.2V 1300mA |

IP20 CE 3 YEARS WARRANTY

# ESCAPE BASE 3F

| | |
|---|---|
| **PRODUCT MATERIAL** | Thermoplastic housing |
| **LIGHTSOURCE** | SMD 3030 LED |
| **COLORS** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **VIEWING DISTANCE** | Wide lens for open area |
| **SIZE** | 143 X 55mm |

## INFORMATION

| | |
|---|---|
| **MAINTAINED** | Non-maintained |
| **AUTO TEST** | Yes |
| **EMERGENCY BATTERY** | Including sealed Ni-NH battery<br>life time 4 years<br>24 hours charge time<br>rechargeable battery pack 1 hour |
| **EN STANDARD** | Europe standard EN1838 |
| **EN STANDARD** | |

| Mounting height | Open area |
|---|---|
| 2,5m | 10m*10m |
| 3,0m | 11m*11m |
| 3,5m | 12m*12m |

| | |
|---|---|
| **REPLACEMENT BATTERY** | Art. no.: 0552.000.00.3 |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | COLOR TEMPERATURE | EMERGENCY LUMEN OUTPUT | MODULE POWER | BATTERY CHARGE DURATION | BATTERY LIFETIME WHEN DISCONNECTED | BATTERY |
|---|---|---|---|---|---|---|---|
| 0552.300.37.3 (white) | 6 X LED SMD 3030 | 6500K | 375lm | 4W | 24 Hrs | 1 hour | Ni_Mh 7.2V 1300mA |
| 0552.300.37.5 (black) | 6 X LED SMD 3030 | 6500K | 375lm | 4W | 24 Hrs | 1 hour | Ni_Mh 7.2V 1300mA |

IP20 CE 3 YEARS WARRANTY

# ESCAPE BASE SQ

| | |
|---|---|
| **PRODUCT MATERIAL** | Thermoplastic housing |
| **LIGHTSOURCE** | LED |
| **COLORS** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **VIEWING DISTANCE** | Wide lens for open area |
| **SIZE** | 140 X 125 X 38mm |

## INFORMATION

| | | |
|---|---|---|
| **MOUNTING OPTIONS** | Wall mounted | Standard |
| | Surface mounted | Standard |
| | 3F track adapter | Option |
| **MAINTAINED** | Non-maintained | |
| **AUTO TEST** | Yes | |
| **EMERGENCY BATTERY** | Including sealed nickel-cadmium rechargeable battery pack (1 hour) | |
| **E N STANDARD** | On request | |
| **REPLACEMENT BATTERY** | Art. no.: 0554.000.00.3 | |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER<br>**SURFACE** | LAMP TYPE | LIGHT OUTPUT | EMERGENCY LUMEN OUTPUT | MODULE POWER | BATTERY CHARGE DURATION | BATTERY LIFETIME WHEN DISCONNECTED | BATTERY | VIEWING DISTANCE |
|---|---|---|---|---|---|---|---|---|
| 0554.999.18.3 (white) | LED | 180lm | 1Hrs / 180lm | 2 X 3W | 24 Hrs | 1 Hr | Ni_Cd 7.2v 800mA | Escape Route |
| 0554.999.18.5 (black) | LED | 180lm | 1Hrs / 180lm | 2 X 3W | 24 Hrs | 1 Hr | Ni_Cd 7.2v 800mA | Escape Route |

IP20 CE 3 YEARS WARRANTY

# ESCAPE BASE SQ 3F

| | |
|---|---|
| **PRODUCT MATERIAL** | Thermoplastic housing |
| **LIGHTSOURCE** | LED |
| **COLORS** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black |
| **VIEWING DISTANCE** | Wide lens for open area |
| **SIZE** | 140 X 125 X 38mm |

## INFORMATION

| | | |
|---|---|---|
| **MOUNTING OPTIONS** | Wall mounted | Standard |
| | Surface mounted | Standard |
| | 3F track adapter | Option |
| **MAINTAINED** | Non-maintained | |
| **AUTO TEST** | Yes | |
| **EMERGENCY BATTERY** | Including sealed nickel-cadmium rechargeable battery pack (1 hour) | |
| **E N STANDARD** | On request | |
| **REPLACEMENT BATTERY** | Art. no.: 0554.000.00.3 | |

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.



Technical drawing

| ARTICLE NUMBER | LAMP TYPE | LIGHT OUTPUT | EMERGENCY LUMEN OUTPUT | MODULE POWER | BATTERY CHARGE DURATION | BATTERY LIFETIME WHEN DISCONNECTED | BATTERY | VIEWING DISTANCE |
|---|---|---|---|---|---|---|---|---|
| 0554.300.33.3 (white) | LED | 180lm | 1Hrs / 180lm | 2 X 3W | 24 Hrs | 1 Hr | Ni_Cd 7.2v 800mA | Escape Route |
| 0554.300.33.5 (black) | LED | 180lm | 1Hrs / 180lm | 2 X 3W | 24 Hrs | 1 Hr | Ni_Cd 7.2v 800mA | Escape Route |

# OUTDOOR LIGHTING

PRIVATE VILLA, HOEVELAKEN, THE NETHERLANDS

**FLOOR 10**
222

**FLOOR 25**
223

**FLOOR LANE**
224

**FLOOR D MINI**
225

**FLOOR D MIDI**
226

**FLOOR D MAXI**
227

**FLOOD D**
228

**FLOOD D MAXI**
229

**KOTYS IP**
231

**RIBBLE**
232

**WALLY**
233

**PILE**
234

**SWEEP**
235

**PIAZZA**
236

**PIAZZA MAXI**
237

IP67 CE 3 YEARS WARRANTY

# FLOOR 10

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel and ABS plastics |
| **LIGHT SOURCE** | Cree XP-E |
| **MODULE LIFETIME** | Approx. 30.000 hours |
| **DRIVER** | Option |
| **COLORS** | **8 =** Stainless steel |
| **BEAM ANGLE** | 40° |
| **SIZE** | Ø178 X 163 X 107mm |

## OPTIONS

| | |
|---|---|
| **HONEYCOMB** | Art. no.: 3055.999.94.9 |
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |

## INFORMATION

Tempered glass standard

Lens plate black colored and adjustable

Including 1,5m cable

Stainless steel ring (316)

IK 10

**Mounting instruction:**
For mounting instructions please visit www.key-light.nl. Full warranty only applies when fixture is mounted according to these instructions

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

**HONEYCOMB**

Honeycomb

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA | Driver |
|---|---|---|---|---|---|---|---|---|---|---|
| 8108.990.30.8 | XP-E | Cree | 306lm | 8,3W | 37lm/W | 2700K | >80 | 30.000 Hrs | 700mA | Included |
| 8108.700.40.8 | XP-E | Cree | 306lm | 8,3W | 37lm/W | 2700K | >80 | 30.000 Hrs | | Excluded |

IP67 CE 3 YEARS WARRANTY

# FLOOR 25

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium body |
| **LIGHT SOURCE** | Bridgelux V13B |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Option |
| **COLORS** | **8 =** Stainless steel |
| **BEAM ANGLE** | 55° |
| **SIZE** | Ø123 X 158mm |

## OPTIONS

| | |
|---|---|
| **OPTIONAL BEAM ANGLE** | 15° Art. no.: 8109.000.15.0<br>24° Art. no.: 8109.000.24.0 |
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |

## INFORMATION

Tempered glass standard

Including 1,5m cable

Stainless steel ring (316)

IK 10

**Mounting instruction:**
For mounting instructions please visit www.key-light.nl. Full warranty only applies when fixture is mounted according to these instructions

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.



Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | BEAM ANGLE | TC LIFETIME | mA | Driver |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 8109.500.55.8 | V13B | Bridgelux | 2500lm | 18W | 139lm/W | 2700K | >80 | 55° | 50.000 Hrs | 500mA | Included |
| 8109.000.55.8 | V13B | Bridgelux | 2500lm | 18W | 139lm/W | 2700K | >80 | 55° | 50.000 Hrs | 500mA | Excluded |

IP67 3 YEARS WARRANTY IK10

# FLOOR LANE

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel |
| **LIGHT SOURCE** | CREE |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Excluding driver |
| **COLORS** | **5 =** Black |
| **BEAM ANGLE** | 60° |
| **SIZE** | Ø90 X 92mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8120.090.60.5 | 1 pc | Cree | 600lm | 3W | 200lm/W | 2700K | >90 | 50.000 Hrs | 700mA |

IP67 3 YEARS WARRANTY IK10

# FLOOR D MINI

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel |
| **LIGHT SOURCE** | CREE |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Excluding driver |
| **COLORS** | ● **5 =** Black |
| **BEAM ANGLE** | 45° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø110 X 96mm |



## OPTIONS

| | |
|---|---|
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8121.110.45.5 | 3 pc | Cree | 600lm | 6W | 100lm/W | 2700K | >90 | 50.000 Hrs | 600mA |
| 8121.115.45.5 | 3 pc | Cree | 600lm | 6W | 100lm/W | RGB | >90 | 50.000 Hrs | 600mA |

# FLOOR D MIDI

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel |
| **LIGHT SOURCE** | CREE |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Excluding driver |
| **COLORS** | **5 =** Black |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø135 X 139mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

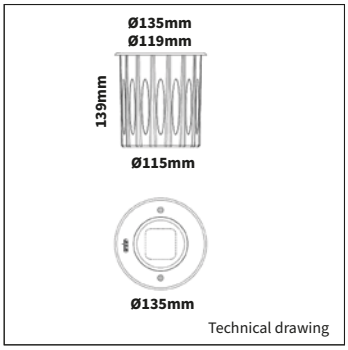


| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8121.135.60.5 | 1 pc | Cree | 1000lm | 13W | 77lm/W | 2700K | >90 | 50.000 Hrs | 700mA |
| 8121.136.60.5 | 1 pc | Cree | 1000lm | 13W | 77lm/W | RGBW | >90 | 50.000 Hrs | 700mA |

# FLOOR D MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel |
| **LIGHT SOURCE** | CREE |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Excluding driver |
| **COLORS** | **5 =** Black |
| **BEAM ANGLE** | 60° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø185 X 188mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

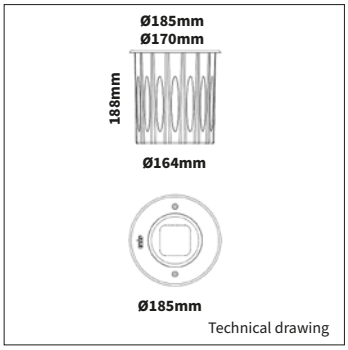


| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8121.185.60.5 | 2 pc | Cree | 2000lm | 20W | 100lm/W | 2700K | >90 | 50.000 Hrs | 700mA |
| 8121.186.60.5 | 2 pc | Cree | 2000lm | 20W | 100lm/W | RGBW | >90 | 50.000 Hrs | 700mA |

IP66 | CE | 3 YEARS WARRANTY

# FLOOD D

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel |
| **LIGHT SOURCE** | CREE |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Excluding driver |
| **COLORS** | **5 =** Black |
| **BEAM ANGLE** | 50° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø150mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |
| **MOUNTING OPTIONS** | On request |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

**MOUNTING OPTIONS**

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8122.150.50.5 | 4 pcs | Cree | 1050lm | 15W | 70lm/W | 2700K | >90 | 50.000 Hrs | 700mA |
| 8122.155.50.5 | 4 pcs | Cree | 700lm | 20W | 35lm/W | RGBW | >90 | 50.000 Hrs | 700mA |

IP66 | CE | 3 YEARS WARRANTY

# FLOOD D MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Stainless steel |
| **LIGHT SOURCE** | CREE |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Excluding driver |
| **COLORS** | ● **5 =** Black |
| **BEAM ANGLE** | 50° |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø180mm |

## OPTIONS

| | |
|---|---|
| **DIMMABLE** | On request<br>For centralized drivers please contact sales |
| **MOUNTING OPTIONS** | On request |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

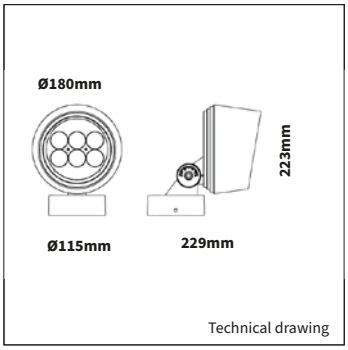

Technical drawing

**MOUNTING OPTIONS**

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8122.180.50.5 | 6 pcs | Cree | 1540lm | 22W | 70lm/W | 2700K | >90 | 50.000 Hrs | 700mA |
| 8122.185.50.5 | 6 pcs | Cree | 1050lm | 30W | 35lm/W | RGBW | >90 | 50.000 Hrs | 700mA |

PRIVATE VILLA, CLEVE, GERMANY

| | |
|---|---|
| **PRODUCT MATERIAL** | Di-cast aluminium |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **7 =** RAL 9007 Anthracite |
| **BEAM ANGLE** | 24° |
| **ADJUSTABLE** | No |
| **SIZE** | Ø163 X 114mm |

## OPTIONS

| | | |
|---|---|---|
| **EMERGENCY MODULE** | Art. no.: 0187.003.03.0 - 3 hour | |
| **DIMMABLE** | DALI dimmable driver | |
| **POWER CABLE OPTIONS**<br>Connected to driver/fixture | Europlug 2000mm 2 X 0,75<br>Art. no.: 0502.075.20.0 | Included |
| | Wieland GST 18/3 male<br>2000mm 3 X 0,75<br>Art. no.: 0501.183.20.0 | |
| | Wieland T connector GST 18/3<br>200mm 3 X 0,75<br>Art. no.: 0500.183.20.0 | |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

**This luminaire is also available in 1100lm SLM on request**




Hole size




Technical drawing

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB*** in the article number field with the COB code found on the last page of the catalogue

| ARTICLE NUMBER | LUMINOUS FLUX | BRAND | COLOR TEMPERATURE | SETTING |
|---|---|---|---|---|
| 4083.**COB***.24.7 | 2000lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |
| 4083.**COB***.24.7 | 2000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4083.**COB***.24.7 | 2000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4083.**COB***.24.7 | 2000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4083.**COB***.24.7 | 2000lm | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 4083.**COB***.24.7 | 3000lm | Philips SLM G7 | 827 / 927 / 830 / 930 / 835 / 840 / 850 / 857 | High Efficiency |
| 4083.**COB***.24.7 | 3000lm | Philips SLM G7 | Premium White 830 / 930 / 935 / 940 | High Efficiency |
| 4083.**COB***.24.7 | 3000lm | Philips SLM G7 | Premium White HE 930 | High Efficiency |
| 4083.**COB***.24.7 | 3000lm | Philips SLM G7 | Premium Color 930 | High Efficiency |
| 4083.**COB***.24.7 | 4500lm | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850 | High Efficiency |

! High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB led specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-casting aluminium |
| **LIGHT SOURCE** | Lumileds 3030 |
| **MODULE LIFETIME** | Approx. 35.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **7 =** RAL 9007 dark grey |
| **BEAM ANGLE** | 120° |
| **SIZE** | 150 X 242mm |

## OPTIONS

| | |
|---|---|
| **DAYLIGHT SENSOR** | Turn on light level 50 Lux<br>Turn off light level > 150 Lux<br>Standard included |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8251.020.00.7 | 3030 | Lumileds | 2100lm | 20W | 105lm/W | 4000K | >80 | 35.000 Hrs | 600mA |
| 8251.030.00.7 | 3030 | Lumileds | 3150lm | 30W | 105lm/W | 4000K | >80 | 35.000 Hrs | 600mA |

IP65 | CE | 3 YEARS WARRANTY

# WALLY

| | |
|---|---|
| **PRODUCT MATERIAL** | Die-casting aluminium |
| **LIGHT SOURCE** | Lumileds 3030 |
| **MODULE LIFETIME** | approx. 35.000 hours |
| **DRIVER** | Including driver |
| **COLORS** | **7 =** RAL 9007 dark grey |
| **BEAM ANGLE** | 120° |
| **ADJUSTABLE** | 90° adjustable head |
| **SIZE** | 200 X 207mm |

## OPTIONS

| | |
|---|---|
| **DAYLIGHT SENSOR** | Turn on light level: 10-16 Lux<br>Turn off light level: >65 Lux<br>Art. no.: 8252.999.99.0 |

## INFORMATION

**The hole for wall mounting should not be any bigger than 130 x 130mm (B X H)**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources.

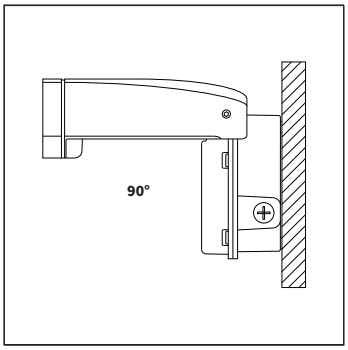





Technical drawing

Wally with daylight sensor

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | mA |
|---|---|---|---|---|---|---|---|---|---|
| 8252.030.00.7 | 3030 | Lumileds | 3600lm | 30W | 120lm/W | 4000K | >80 | 35.000 Hrs | 630mA |
| 8252.050.00.7 | 3030 | Lumileds | 6000lm | 50W | 120lm/W | 4000K | >80 | 35.000 Hrs | 1020mA |

IP65 | CE | 5 YEARS WARRANTY

# PILE

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and steel |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **SIZE** | Ø90 X 1000mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | Clear tempered glass in standard<br>Mat on request |
| **MOUNTING BASE** | Mounting base |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Mounting base



Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME |
|---|---|---|---|---|---|---|---|---|
| Δ See colors | | | | | | | | |
| 8023.150.30.Δ | SLM | Philips | 1300lm | 8W | 163lm/W | 3000K | >80 | 50.000 Hrs |
| 8023.150.40.Δ | SLM | Philips | 1300lm | 8W | 163lm/W | 4000K | >80 | 50.000 Hrs |
| 8023.151.30.Δ | SLM | Philips | 2000lm | 12W | 167lm/W | 3000K | >80 | 50.000 Hrs |
| 8023.151.40.Δ | SLM | Philips | 2000lm | 12W | 167lm/W | 4000K | >80 | 50.000 Hrs |
| 8023.152.30.Δ | SLM | Philips | 3000lm | 20W | 150lm/W | 3000K | >80 | 50.000 Hrs |
| 8023.152.40.Δ | SLM | Philips | 3000lm | 20W | 150lm/W | 4000K | >80 | 50.000 Hrs |

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium and steel |
| **LIGHT SOURCE** | Philips SLM G7 |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **BEAM ANGLE** | Wide Angle |
| **ADJUSTABLE** | Yes |
| **SIZE** | Ø135 X 1006mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |
| **DIFFUSER** | Clear tempered glass in standard,<br>mat on request |
| **MOUNTING BASE** | Mounting base |

## INFORMATION

**Nominal lifetime L90/B50 @50.000 h - 25°C**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Mounting base




Technical drawing

| ARTICLE NUMBER<br>Δ See colors | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | MINIMUM ORDER QUANTITY |
|---|---|---|---|---|---|---|---|---|---|
| 8024.150.30.Δ | SLM | Philips | 1200lm | 7W | 171lm/W | 3000K | >80 | 50.000 Hrs | 10 |
| 8024.150.40.Δ | SLM | Philips | 1200lm | 7W | 171lm/W | 4000K | >80 | 50.000 Hrs | 10 |
| 8024.151.30.Δ | SLM | Philips | 2200lm | 16W | 138lm/W | 3000K | >80 | 50.000 Hrs | 10 |
| 8024.151.40.Δ | SLM | Philips | 2200lm | 16W | 138lm/W | 4000K | >80 | 50.000 Hrs | 10 |

IP65 | CE | 5 YEARS WARRANTY

# PIAZZA

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **DIFFUSER** | Mat acrilic diffuser |
| **SIZE** | 80 X 60 X 900/1300/1600/2500mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |

## INFORMATION

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.



Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | LENGTH |
|---|---|---|---|---|---|---|---|---|---|
| **Piazza 90** | | | | | | | | | |
| 8074.700.90.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 3000K | >80 | 50.000 Hrs | 900mm |
| 8074.800.90.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 4000K | >80 | 50.000 Hrs | 900mm |
| **Piazza 130** | | | | | | | | | |
| 8074.700.13.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 3000K | >80 | 50.000 Hrs | 1300mm |
| 8074.800.13.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 4000K | >80 | 50.000 Hrs | 1300mm |
| **Piazza 160** | | | | | | | | | |
| 8074.700.16.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 3000K | >80 | 50.000 Hrs | 1600mm |
| 8074.800.16.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 4000K | >80 | 50.000 Hrs | 1600mm |
| **Piazza 250** | | | | | | | | | |
| 8074.700.25.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 3000K | >80 | 50.000 Hrs | 2500mm |
| 8074.800.25.Δ | LED module | Osram | 1300lm | 9W | 144lm/W | 4000K | >80 | 50.000 Hrs | 2500mm |

Δ See colors

IP65 CE 5 YEARS WARRANTY

# PIAZZA MAXI

| | |
|---|---|
| **PRODUCT MATERIAL** | Aluminium |
| **LIGHT SOURCE** | Philips LED module |
| **MODULE LIFETIME** | Approx. 50.000 hours |
| **DRIVER** | Including driver |
| **COLORS (Δ)** | ○ **3 =** RAL 9003 white<br>● **5 =** RAL 9005 black<br>● **6 =** RAL 9006 alu |
| **DIFFUSER** | Mat acrilic diffuser |
| **SIZE** | 100 X 80 X 3000/5000mm |

## OPTIONS

| | |
|---|---|
| **COLORS** | Available in all RAL colours on request<br>Additional price + 10% |

## INFORMATION

**Also available in different hights**

Keylight International reserves the right to modify or change technical, construction or LED specifications due to continuous improvements of our products and light sources. The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.




Technical drawing

| ARTICLE NUMBER | LAMP TYPE | BRAND | LUMINOUS FLUX | OUTPUT POWER | MODULE EFFICIENCY | COLOR TEMPERATURE | CRI | TC LIFETIME | LENGTH |
|---|---|---|---|---|---|---|---|---|---|
| **Piazza Maxi 300** | | | | | | | | | |
| 8074.700.30.Δ | LED module | Osram | 4500lm | 29W | 155lm/W | 3000K | >80 | 50.000 Hrs | 3000mm |
| 8074.800.30.Δ | LED module | Osram | 4500lm | 29W | 155lm/W | 4000K | >80 | 50.000 Hrs | 3000mm |
| **Piazza Maxi 500** | | | | | | | | | |
| 8074.700.50.Δ | LED module | Osram | 4500lm | 29W | 155lm/W | 3000K | >80 | 50.000 Hrs | 5000mm |
| 8074.800.50.Δ | LED module | Osram | 4500lm | 29W | 155lm/W | 4000K | >80 | 50.000 Hrs | 5000mm |

Δ See colors

# Warranty

This document sets out the warranty policy of the Keylight (sales) organization ('Keylight') from which you ('Purchaser') purchase your components.
This policy is applicable only to Keylight branded components ('Products') sold in Europe and installed from March 2015 onwards. Warranty conditions on previously installed products remain unchanged.
This warranty policy is subject to the provisions set out below and is subject to the attached terms and conditions ('Warranty Terms and Conditions'). This warranty policy only applies if referred to in a sales agreement between Keylight and the Purchaser and will replace the standard warranty clause provided in the Keylight general terms and conditions of sale.

**A. Warranty period**
Subject to the provisions as set out in the Warranty Terms and Conditions, Purchaser receives the warranty for the applicable period, as described in the table on the right. Derived or co-developed products may have different warranty periods and conditions. These prevail above the periods mentioned in the table.

**B. Special conditions**

- Warranty period starts from date of installation, but will never start later than six (6) months after the date of manufacturing of the Product.
- Warranty period is based on a maximum 1000 hours per year for 'Other Lamps' and 4000 hours per year for all other products.
- Product has to be applied in accordance to Keylight specification and guidelines, and with usage in accordance to IEC switching cycles.
- Purchaser has to provide complaint info (i.e. system used, installation date); no upfront registration is required.
- Compensation is product for product for all confirmed failures; no minimum threshold applies; labour costs are not covered. (De) mounting, (de)installation, removal and replacement of Products, structures or other parts of Customer's facility, decontamination, and re-installation of (Defect) Products are not covered by the warranty provided hereunder. Customer will be responsible and shall bear the costs for these activities, including costs of access for remedial warranty efforts by Keylight.

## LED

| LED module | Yrs* |
|---|---|
| Fortimo LED, SLM, SLM flex, DLM, DLM flex | 5 |
| Fortimo LED Strip, LED Line | 5 |
| Core LED line | 3 |
| Fortimo LED Twistable (TDLM) | 3 |
| Fortimo LED Disk, Integrated Sot, DLMi | 3 |
| Certaflux LED Strip, LED Line | 3 |
| Certaflux DL-S | 2 |

| LED Lamps & LEDtube | Yrs |
|---|---|
| See dedicated leaflet | - |

| Driver | Yrs |
|---|---|
| Xitanium | 5 |
| CertaDrive | 3 |

| Driver | Yrs |
|---|---|
| TrustSight LED Converter | 5 |
| Battery set | 1 |

## LED Lamps

| Led Lamp | Total warranty hours | Yrs |
|---|---|---|
| MasterConnect | 20.000 | 5 |
| Master | 20.000 | 5 |
| Master Value Spots | 20.000 | 5 |
| CorePro | 8.000 | 2 |
| Classic LED | 8.000 | 2 |

## LED Tubes

| LED Tube | Total warranty hours | Yrs |
|---|---|---|
| Master UE | 61.320 | 7 |
| MasterConnect | 43.800 | 5 |
| Master UO/HO | 43.800 | 5 |
| Master Value UO/HO | 43.800 | 5 |
| CorePro | 20.000 | 3 |

***** Warranty only for component in Philips System.
For more information, see Philips warranty Policy.

# Keylight test facility

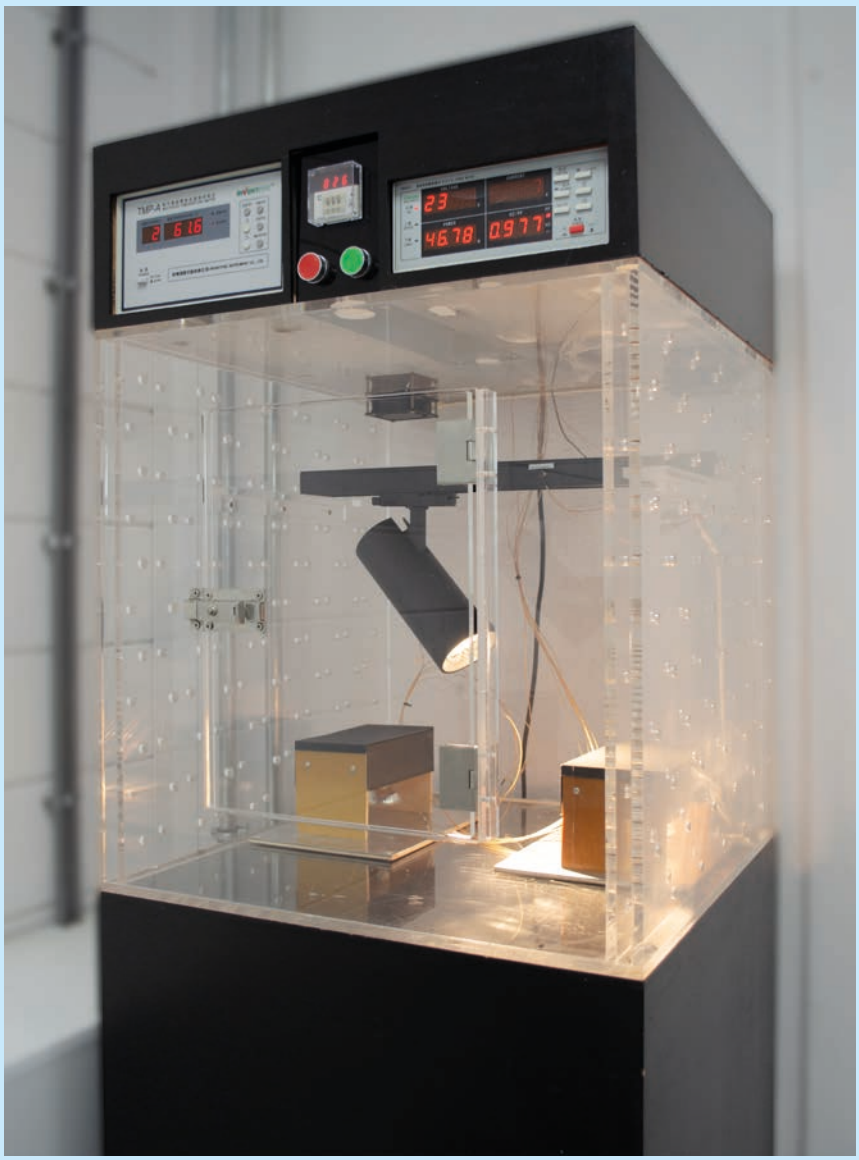

**Lumen maintenance L90B50 @ 50,000 hours**

The quality of the LED SLM portfolio is backed by the claim of B50L90 @ 50,000 hours. This means that at 50,000 hours of operation at least 50% of the LEDs' population will emit at least 90% of its original amount of lumens.

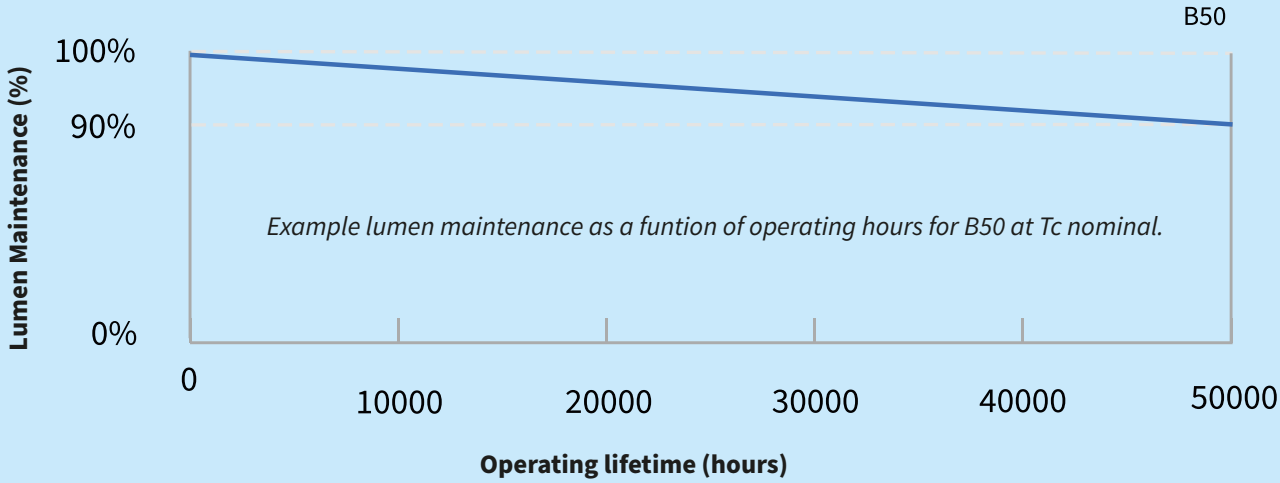


Average rated life is based on engineering data testing and probability analysis. The Fortimo LED SLM modules are specified to reach L90B50 for the nominal Keylight specifications.

# Fortimo SLM G7 module specifications

To order the desired COB for the selected luminaire, replace **COB*** in the article number field with the SLM code found on this page. Different lumen output or wattages available on request.

## SERIES 1100 LUMEN

| COB* | COB | LUMINOUS FLUX | MODULE EFFICIENCY | OUTPUT POWER | COLOR TEMPERATURE | CRI | TC | INPUT CURRENT | POWER FACTOR | TC LIFETIME (L70B50) |
|---|---|---|---|---|---|---|---|---|---|---|
| 112. | SLM 830 G7 | 1098lm | 179lm/W | 6,1W | 3000K | >80 | 85°C | 190mA | >0,9 | > 50.000 Hrs |
| 169. | SLM 835 G7* | 1102lm | 182lm/W | 6,0W | 3500K | >80 | 85°C | 187mA | >0,9 | > 50.000 Hrs |
| 113. | SLM 840 G7 | 1097lm | 187lm/W | 5,9W | 4000K | >80 | 85°C | 182mA | >0,9 | > 50.000 Hrs |
| 151. | SLM 850 G7* | 1097lm | 187lm/W | 5,9W | 5000K | >80 | 85°C | 182mA | >0,9 | > 50.000 Hrs |
| 146. | SLM 927 G7 | 1098lm | 139lm/W | 7,9W | 2700K | >90 | 85°C | 241mA | >0,9 | > 50.000 Hrs |
| 147. | SLM 930 G7 | 1099lm | 145lm/W | 7,6W | 3000K | >90 | 85°C | 232mA | >0,9 | > 50.000 Hrs |
| 128. | SLM 830 PW G7 | 1101lm | 173lm/W | 6,3W | Premium White | >80 | 85°C | 196mA | >0,9 | > 50.000 Hrs |
| 129. | SLM 930 PW G7 | 1099lm | 145lm/W | 7,6W | Premium White | >90 | 85°C | 232mA | >0,9 | > 50.000 Hrs |
| 194. | SLM 930 PW G7 HE | 1101lm | 166lm/W | 6,6W | Premium White HE | >90 | 85°C | 206mA | >0,9 | > 50.000 Hrs |
| 170. | SLM 935 PW G7 | 1099lm | 153lm/W | 7,2W | Premium White | >90 | 85°C | 220mA | >0,9 | > 50.000 Hrs |
| 148. | SLM 940 PW G7* | 1098lm | 158lm/W | 7,0W | Premium White | >90 | 85°C | 214mA | >0,9 | > 50.000 Hrs |
| 171. | SLM 930 PC G7 | 1101lm | 131lm/W | 8,4W | Premium Color | >90 | 85°C | 254mA | >0,9 | > 50.000 Hrs |
| 152. | SLM 925 FWW G7 | 1099lm | 95lm/W | 11,6W | Bakery | 84 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 184. | SLM 950 FLS G7* | 1100lm | 144lm/W | 7,6W | Live Seafood | >90 | 85°C | 236mA | >0,9 | > 50.000 Hrs |
| 175. | SLM 865 FIS G7* | 1101lm | 154lm/W | 7,1W | Iced Seafood | >80 | 85°C | 220mA | >0,9 | > 50.000 Hrs |

## SERIES 2000 LUMEN

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 114. | SLM 830 G7 | 1929lm | 165lm/W | 11,7W | 3000K | >80 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 166. | SLM 835 G7* | 1966lm | 168lm/W | 11,7W | 3500K | >80 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 116. | SLM 840 G7 | 2009lm | 172lm/W | 11,7W | 4000K | >80 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 130. | SLM 850 G7* | 2009lm | 172lm/W | 11,7W | 5000K | >80 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 115. | SLM 927 G7 | 2110lm | 123lm/W | 17,1W | 2700K | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 120. | SLM 930 G7 | 2190lm | 128lm/W | 17,1W | 3000K | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 126. | SLM 830 PW G7 | 1878lm | 161lm/W | 11,7W | Premium White | >90 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 127. | SLM 930 PW G7 | 2190lm | 128lm/W | 17,1W | Premium White | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 195. | SLM 930 PW G7 HE | 1801lm | 152lm/W | 13,2W | Premium White HE | >90 | 85°C | 350mA | >0,9 | > 50.000 Hrs |
| 167. | SLM 935 PW G7 | 2300lm | 134lm/W | 17,1W | Premium White | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 144. | SLM 940 PW G7* | 1998lm | 143lm/W | 13,9W | Premium White | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 172. | SLM 930 PC G7 | 2040lm | 119lm/W | 17,2W | Premium Color | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 159. | SLM 925 FWW G7 | 2032lm | 82lm/W | 23,6W | Bakery | 84 | 85°C | 700mA | >0,9 | > 50.000 Hrs |
| 187. | SLM 950 FLS G7* | 2200lm | 129lm/W | 17,1W | Live Seafood | >90 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 176. | SLM 865 FIS G7* | 2360lm | 138lm/W | 17,1W | Iced Seafood | >80 | 85°C | 500mA | >0,9 | > 50.000 Hrs |

! * This SLM module has a leadtime of approx. 9 weeks. For more information, please contact our sales department.

## SERIES 3000 LUMEN

| COB* | COB | LUMINOUS FLUX | MODULE EFFICIENCY | OUTPUT POWER | COLOR TEMPERATURE | CRI | TC | INPUT CURRENT | POWER FACTOR | TC LIFETIME (L70B50) |
|---|---|---|---|---|---|---|---|---|---|---|
| 165. | SLM 827 G7* | 3121lm | 156lm/W | 20,0W | 2700K | >80 | 85°C | 600mA | >0,9 | > 50.000 Hrs |
| 117. | SLM 830 G7 | 3244lm | 162lm/W | 20,0W | 3000K | >80 | 85°C | 600mA | >0,9 | > 50.000 Hrs |
| 163. | SLM 835 G7 | 3309lm | 166lm/W | 20,0W | 3500K | >80 | 85°C | 600mA | >0,9 | > 50.000 Hrs |
| 119. | SLM 840 G7 | 2863lm | 174lm/W | 16,4W | 4000K | >80 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 121. | SLM 850 G7* | 2870lm | 175lm/W | 16,4W | 5000K | >80 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 138. | SLM 857 G7* | 2856lm | 174lm/W | 16,4W | 5700K | >80 | 85°C | 500mA | >0,9 | > 50.000 Hrs |
| 118. | SLM 927 G7 | 2965lm | 126lm/W | 23,6W | 2700K | >90 | 85°C | 700mA | >0,9 | > 50.000 Hrs |
| 164. | SLM 930 G7 | 3078lm | 130lm/W | 23,6W | 3000K | >90 | 85°C | 700mA | >0,9 | > 50.000 Hrs |
| 131. | SLM 830 PW G7 | 3153lm | 158lm/W | 20,0W | Premium White | >80 | 85°C | 600mA | >0,9 | > 50.000 Hrs |
| 132. | SLM 930 PW G7 | 3078lm | 130lm/W | 23,6W | Premium White | >90 | 85°C | 700mA | >0,9 | > 50.000 Hrs |
| 196. | SLM 930 PW G7 HE* | 3496lm | 148lm/W | 23,7W | Premium White HE | >90 | 85°C | 700mA | >0,9 | > 50.000 Hrs |
| 110. | SLM 935 PW G7 | 3238lm | 137lm/W | 23,6W | Premium White | >90 | 85°C | 700mA | >0,9 | > 50.000 Hrs |
| 145. | SLM 940 PW G7 | 3082lm | 157lm/W | 19,7W | Premium White | >90 | 85°C | 600mA | >0,9 | > 50.000 Hrs |
| 173. | SLM 930 PC G7 | 3249lm | 118lm/W | 27,4W | Premium Color | >90 | 85°C | 800mA | >0,9 | > 50.000 Hrs |
| 139. | SLM 925 FWW G7 | 3038lm | 82lm/W | 37,0W | Bakery | 84 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |
| 140. | SLM 930 FPR G7 | 3237lm | 87lm/W | 37,0W | Meat | 88 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |

## SERIES 4500 LUMEN

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| 135. | SLM 830 G7 | 4888lm | 161lm/W | 30,4W | 3000K | >80 | 85°C | 900mA | >0,9 | > 50.000 Hrs |
| 161. | SLM 835 G7* | 4989lm | 164lm/W | 30,4W | 3500K | >80 | 85°C | 900mA | >0,9 | > 50.000 Hrs |
| 136. | SLM 840 G7 | 4644lm | 174lm/W | 26,7W | 4000K | >80 | 85°C | 800mA | >0,9 | > 50.000 Hrs |
| 123. | SLM 850 G7 | 4643lm | 174lm/W | 26,7W | 5000K | >80 | 85°C | 800mA | >0,9 | > 50.000 Hrs |
| 157. | SLM 927 G7* | 4519lm | 126lm/W | 35,9W | 2700K | >90 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |
| 137. | SLM 930 G7 | 4732lm | 132lm/W | 35,9W | 3000K | >90 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |
| 179. | SLM 830 PW G7 | 4818lm | 159lm/W | 30,4W | Premium White | >80 | 85°C | 900mA | >0,9 | > 50.000 Hrs |
| 180. | SLM 930 PW G7 | 4732lm | 132lm/W | 35,9W | Premium White | >90 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |
| 197. | SLM 930 PW G7 HE* | 5142lm | 143lm/W | 35,9W | Premium White HE | >90 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |
| 162. | SLM 935 PW G7 | 4937lm | 137lm/W | 35,9W | Premium White | >90 | 85°C | 1050mA | >0,9 | > 50.000 Hrs |
| 158. | SLM 940 PW G7* | 4452lm | 147lm/W | 30,4W | Premium White | >90 | 85°C | 900mA | >0,9 | > 50.000 Hrs |
| 156. | SLM 925 FWW G7* | 3664lm | 88lm/W | 41,5W | Bakery | 84 | 85°C | 1200mA | >0,9 | > 50.000 Hrs |
| 178. | SLM 930 FPR G7* | 3910lm | 94lm/W | 41,6W | Meat | 88 | 85°C | 1200mA | >0,9 | > 50.000 Hrs |

# COLOPHON

The world of lighting is in constant motion. Therefore, it may happen that we implement technical innovations and upgrades to our lighting collection in the meantime.

We strive to always use the most current and reliable technologies in our lighting collection. We keep a sharp eye on the quality and functionality of our products. As soon as improvements are made, we will immediately implement them in our products, not only for our own benefit, but also for that of our customers.

This means that our catalogues and datasheets are also subject to change. Therefore, the information in our printed catalogues may not always be up to date. For up-to-date product information, data, technical specifications and images, please visit our website: key-light.nl.

Our website is updated daily in order to provide our customers with the most accurate information about our products. Should you encounter any problems, please let us know immediately.

# SHOWROOM

**Keylight**
Pelenerf 14
3861 PR Nijkerk

+31(0)33 246 21 20

sales@key-light.nl
www.key-light.nl

Appointments in our showroom are made by reservation. If you would like to make an appointment in our showroom, please contact us using the contact information above.

# CREDITS

**ART DIRECTION**
Keylight

**GRAPHIC DESIGN**
Keylight

**PROJECT PHOTOGRAPHY**
Anne Noor
Danique Koenen
Drees & Sommer
Hans Gorter
Hugo de Jong
Jan Buwalda
Jaro van Meerten
Job Karstens
Keylight
Martin Ligtvoet
Peter Tijhuis
René Gonkel
René Kuipers
Sal Marston
Thibault de Schepper / Tibods
Tjapko de Heus

**PRODUCT PHOTOGRAPHY**
Keylight

**LAYOUT**
Keylight Marketing Team

**EDITION**
May 2022
Copyright © Keylight 2022
All rights reserved

KEY-LIGHT.NL